

**Ordering number CN12638_LENINA-S**

Family	Lenina	FWHM	16 degrees
Type	Pack	Efficiency	88 %
LED	CXA2011	cd/Im	4.400
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	46.95 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number CN12641_LENINA-S-DL**

Family	Lenina	FWHM	20 degrees
Type	Pack	Efficiency	80 %
LED	CXA2011	cd/Im	3.500
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	49.05 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number CN12639_LENINA-M**

Family	Lenina	FWHM	28 degrees
Type	Pack	Efficiency	85 %
LED	CXA2011	cd/Im	2.200
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	46.95 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number CN12642_LENINA-M-DL**

Family	Lenina	FWHM	33 degrees
Type	Pack	Efficiency	77 %
LED	CXA2011	cd/Im	1.800
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	49.05 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number** CN12640_LENINA-W

Family	Lenina	FWHM	50 degrees
Type	Pack	Efficiency	86 %
LED	CXA2011	cd/Im	1.200
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	46.95 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number** CN12643_LENINA-W-DL

Family	Lenina	FWHM	52 degrees
Type	Pack	Efficiency	78 %
LED	CXA2011	cd/Im	1.000
Color	Metal	Gerber File	Available
Diameter	74 mm		
Height	49.05 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Screw		
Status	Ready		

**Ordering number** CN12959_LENINA-XW

Family	Lenina	FWHM	72 degrees
Type	Pack	Efficiency	87 %
LED	CXA2011	cd/Im	0.700
Color	White	Gerber File	Available
Diameter	74 mm		
Height	46.95 mm		
Style	Round		
Optic Material	PC		
Holder Material	PC		
Fastening	Socket, socket		
Status	Ready		

Reflector twist-and-locks into included base part that holds COB

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET


Lenina series

last update 15/1/2013

GENERAL INFORMATION

- Product series especially designed & optimized for CXA2011 series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).
- Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).

Absolute intensity of CN12959_LENINA-XW

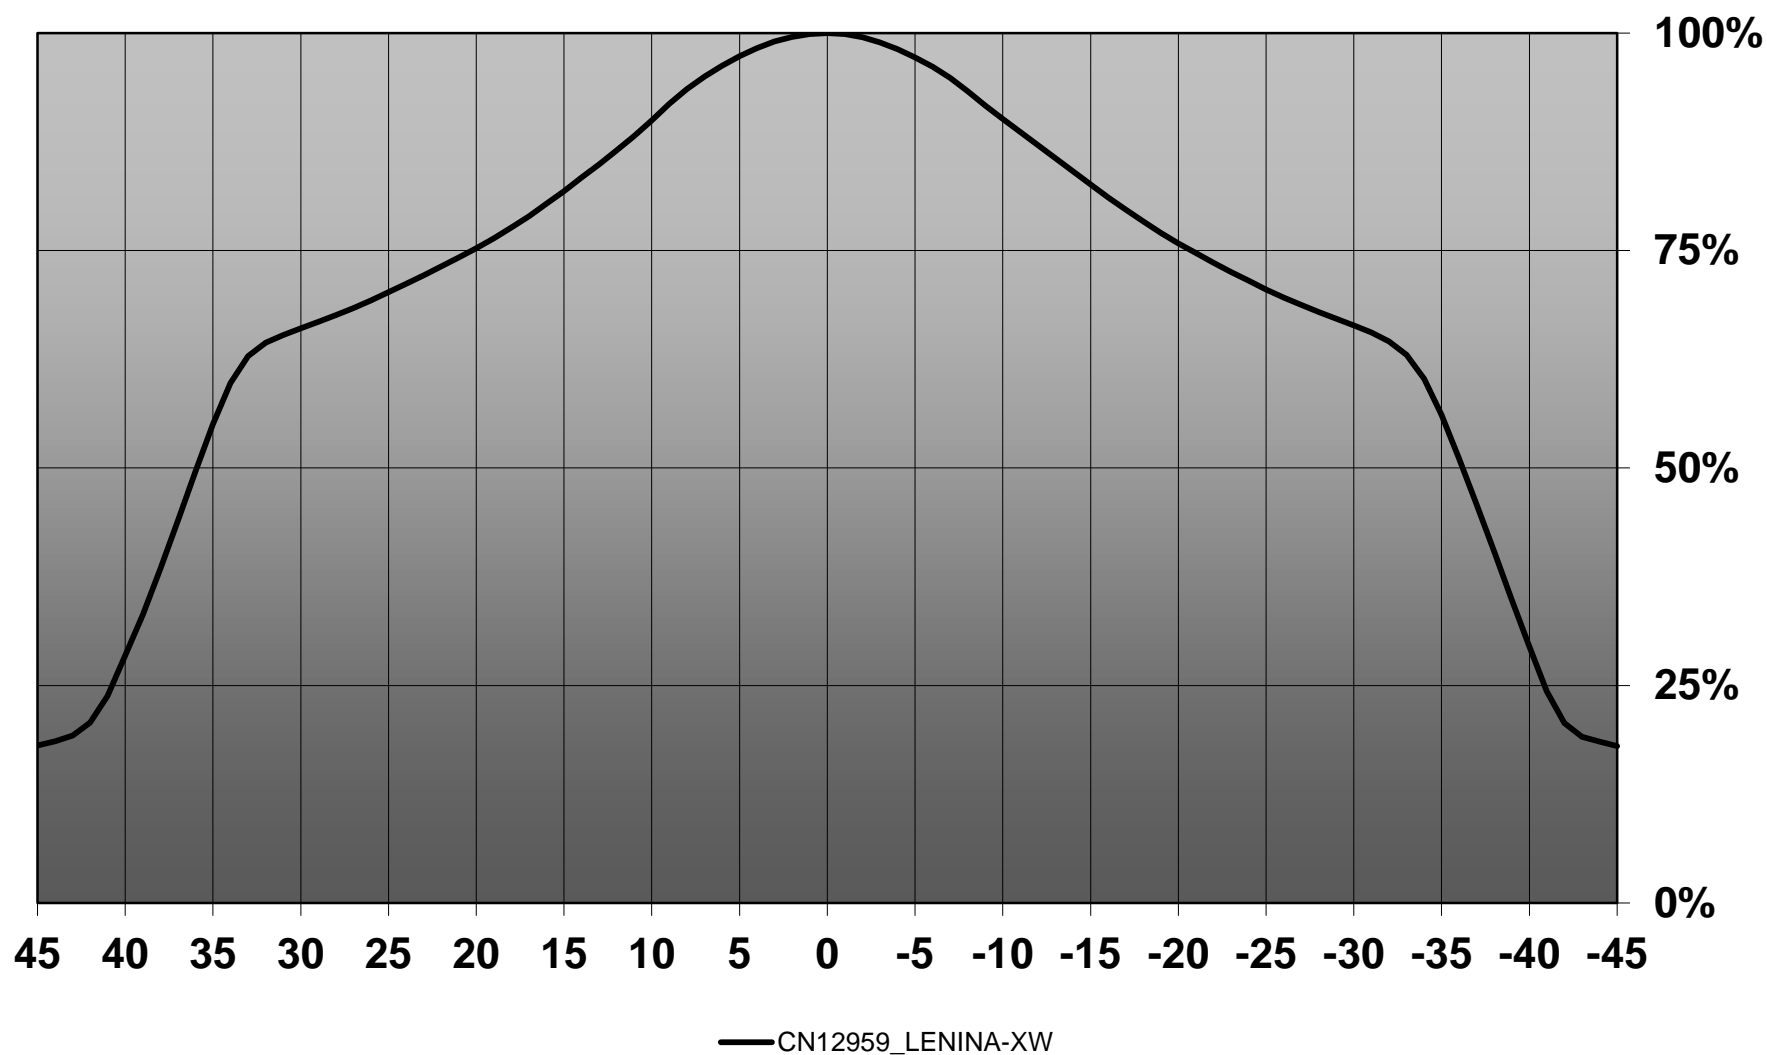

4

3

2

1

D

C

B




A

4

3

2

1

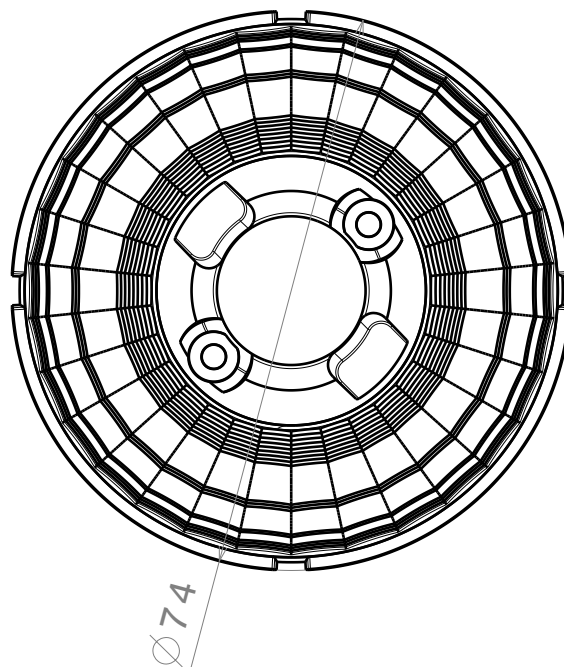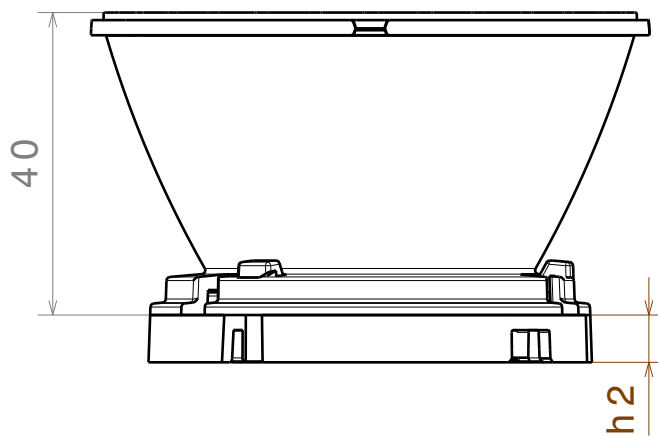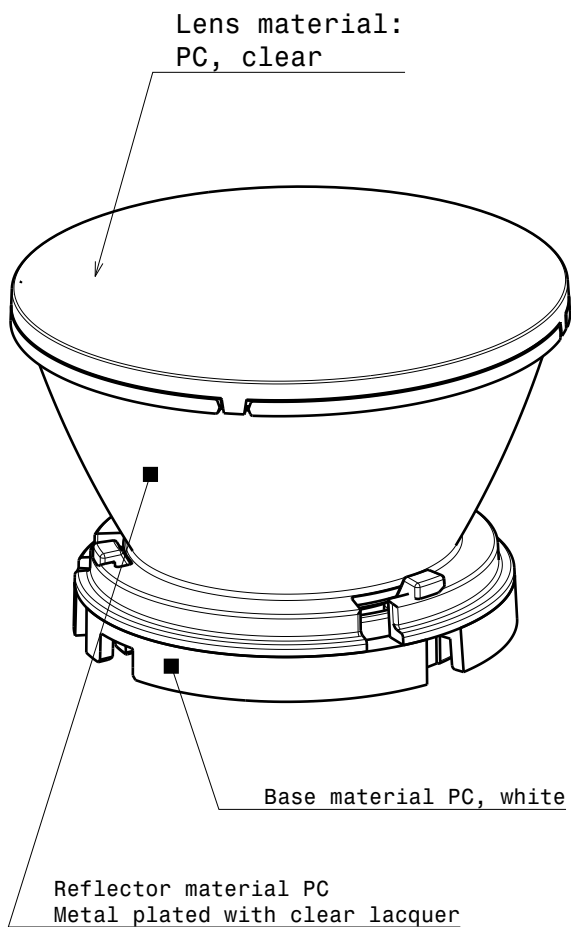

NOTE:

Using optional sublens, add 2.1mm to the system height

Dimension 'h2' varies from 4.5mm to 7mm depending on the LED specific base part

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



Ledil Oy
Salorankatu 10
FIN-24240 SALO
Finland

DRAWING TITLE

Datasheet Lenina series

DRAWN BY
pl

DATE
08.03.2012

CHECKED BY

DATE

SIZE
A4

DRAWING NUMBER

--

REV
1

DESIGNED BY
pl

DATE
08.03.2012


SCALE 1:1 WEIGHT (g)

SHEET 1/1


D

A


Luminaire: Ledil Oy CN12638_LENINA-S (Cree CXA20 698lm @ 250mA) Efficiency=88%
Lamps: 1 x Cree CXA20 698lm @ 250mA

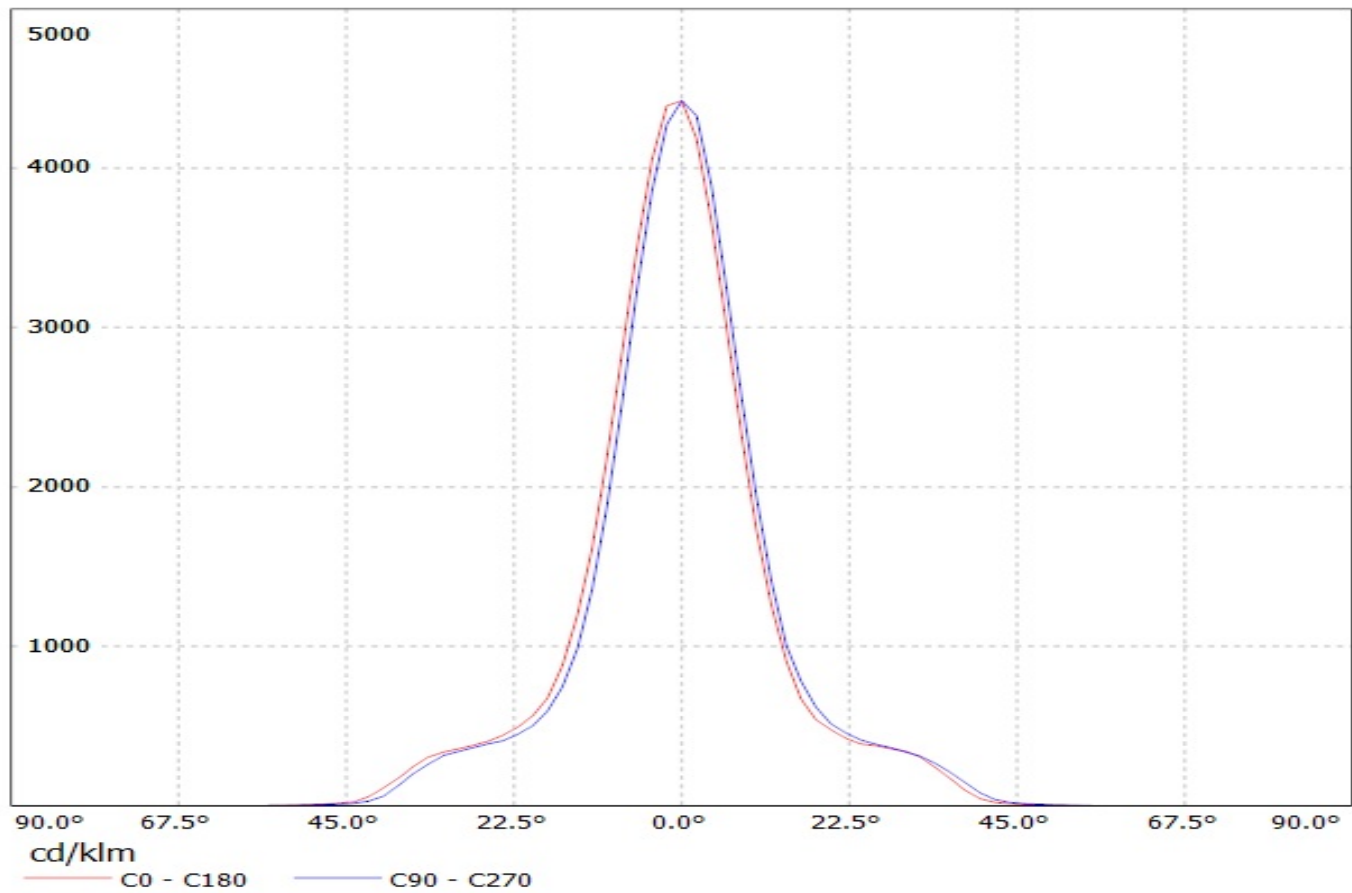


Luminaire: Ledil Oy CN12641_LENINA-S-DL (Cree CXA20 698lm @ 250mA) Efficiency=80%
Lamps: 1 x Cree CXA20 698lm @ 250mA

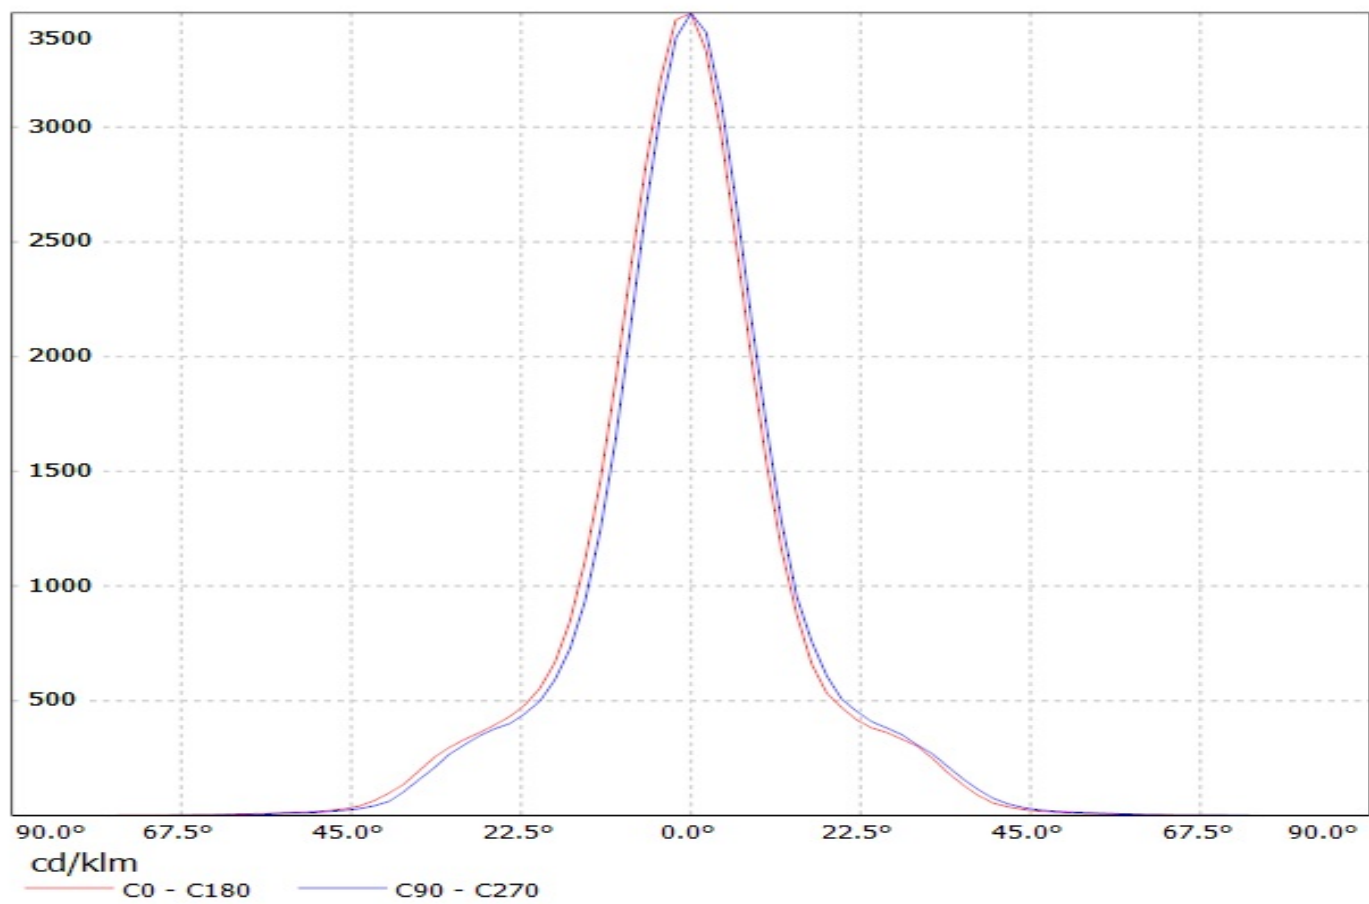


Luminaire: Ledil Oy CN12639_LENINA-M (Cree CXA20 698lm @ 250mA) Efficiency=85%
Lamps: 1 x Cree CXA20 698lm @ 250mA

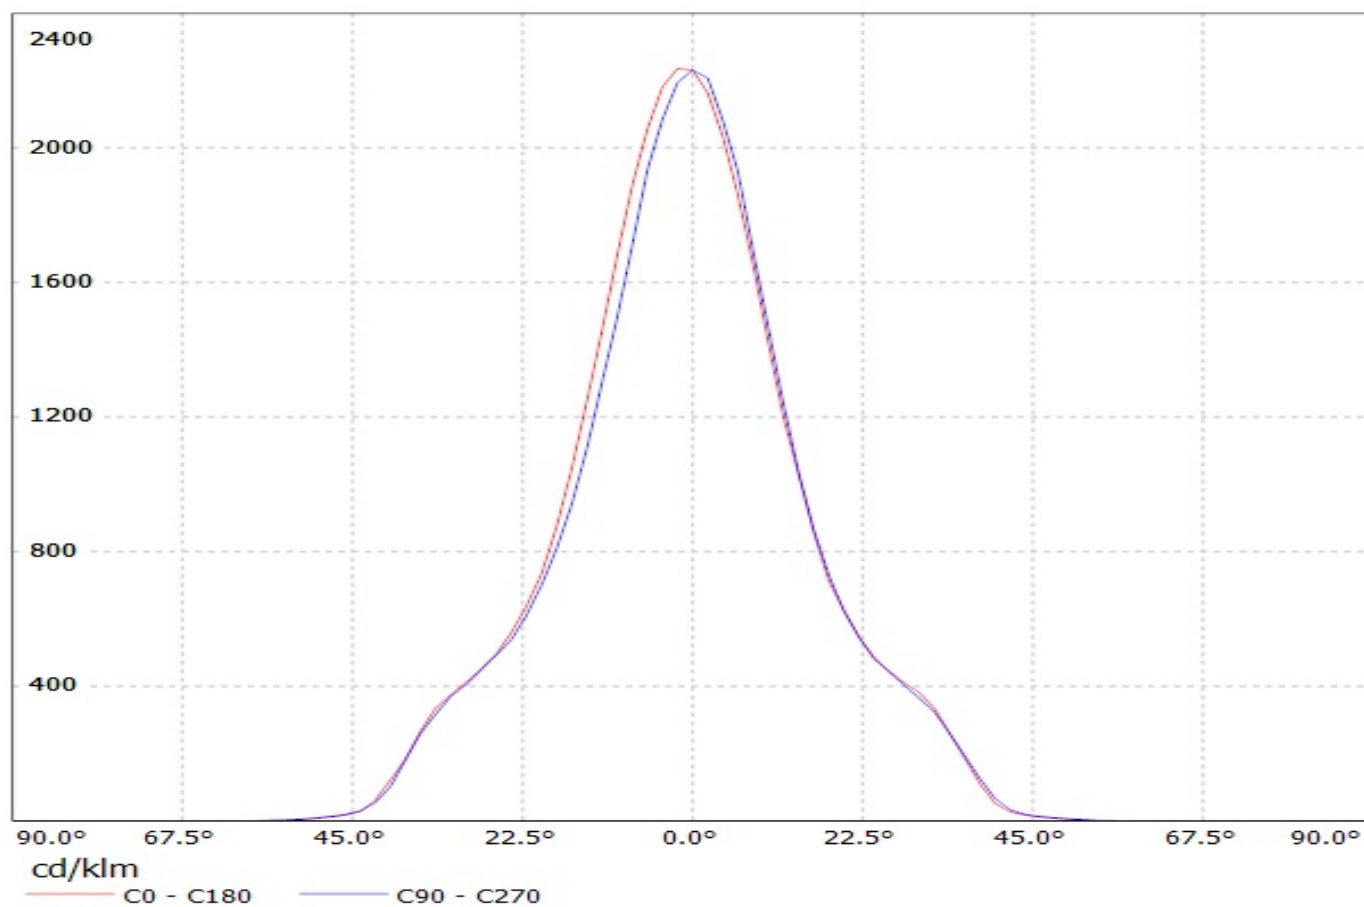


Luminaire: Ledil Oy CN12642_LENINA-M-DL (Cree CXA20 698lm @ 250mA) Efficiency=77%
Lamps: 1 x Cree CXA20 698lm @ 250mA

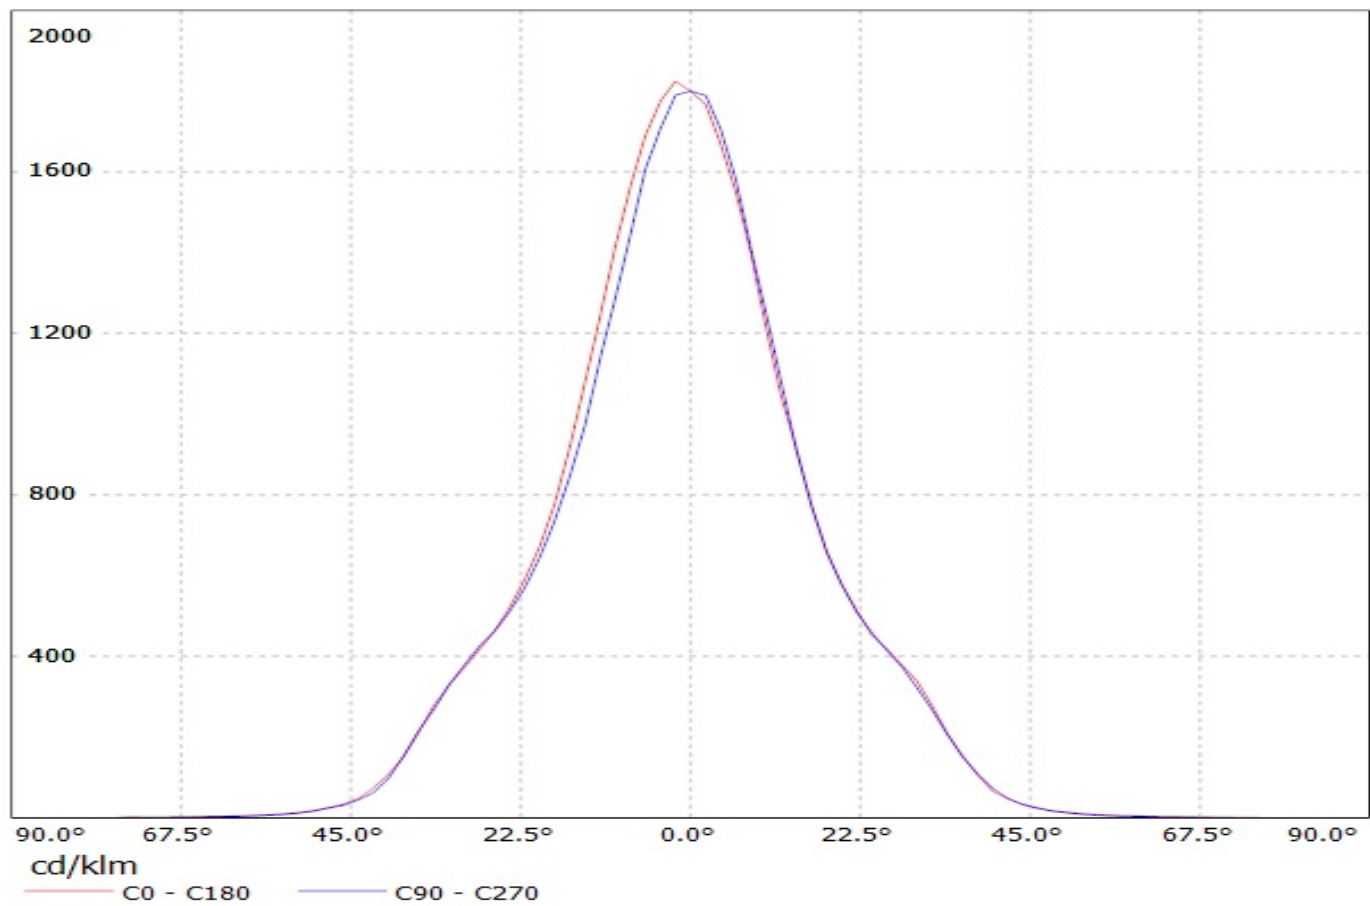


Luminaire: Ledil Oy CN12640_LENINA-W (Cree CXA20 698lm @ 250mA) Efficiency=86%
Lamps: 1 x Cree CXA20 698lm @ 250mA

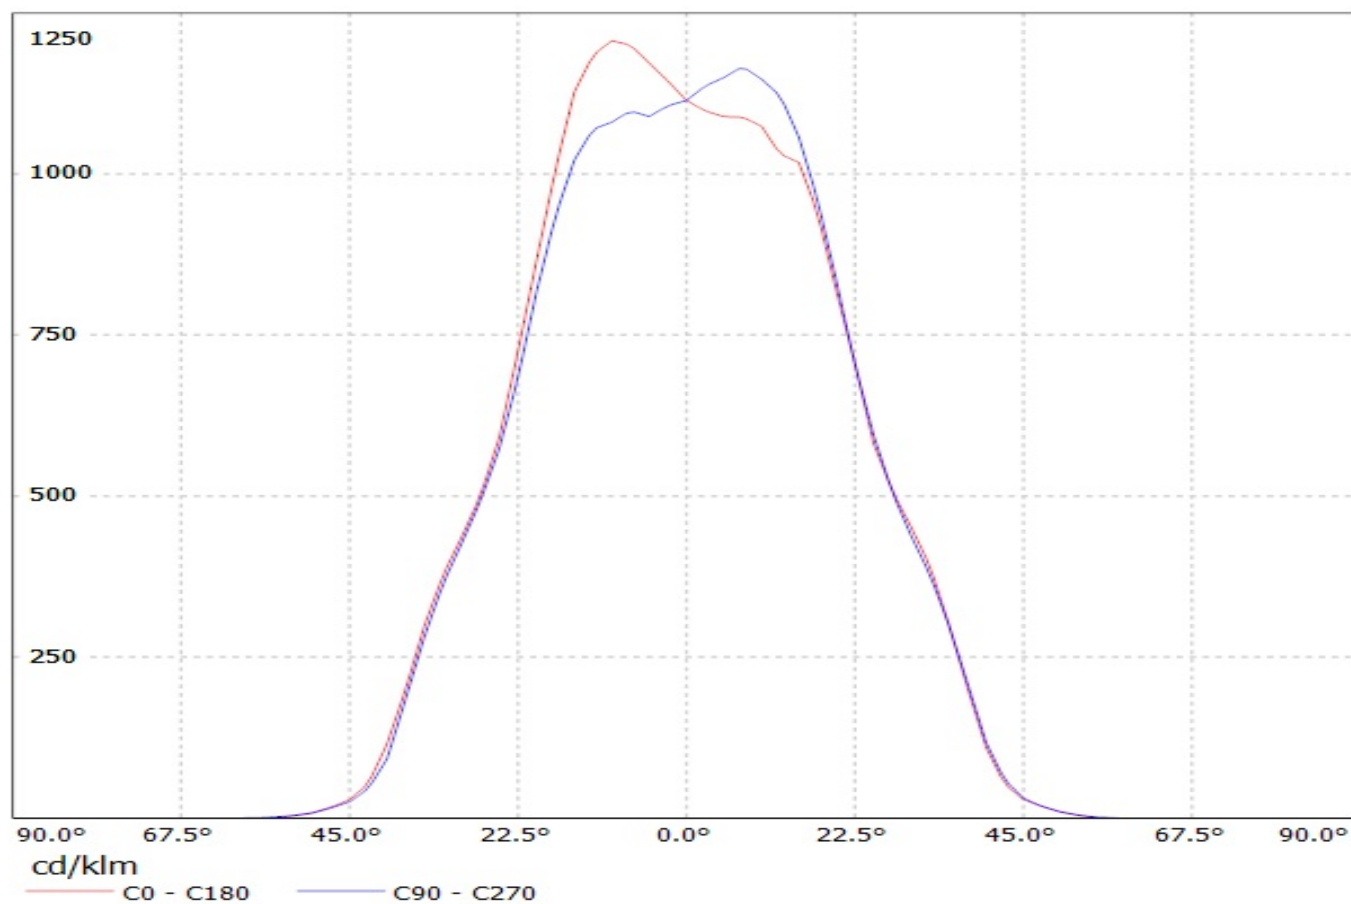


Luminaire: Ledil Oy CN12643_LENINA-W-DL (Cree CXA20 698lm @ 250mA) Efficiency=78%
Lamps: 1 x Cree CXA20 698lm @ 250mA

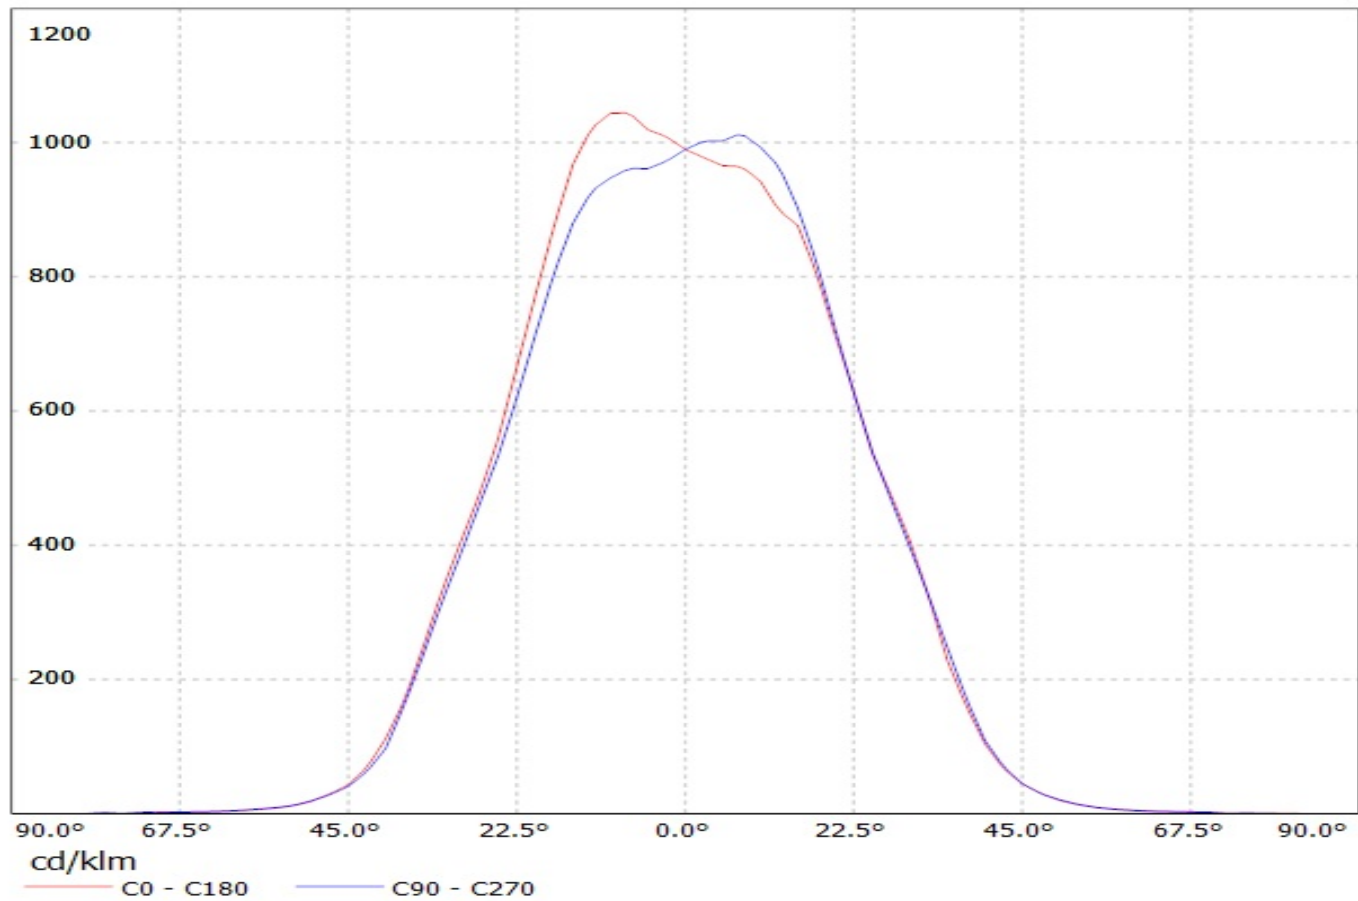


Luminaire: Ledil Oy CN12959_LENINA-XW (Cree CXA20 698lm @ 250mA) Efficiency=87%
Lamps: 1 x Cree CXA20 698lm @ 250mA

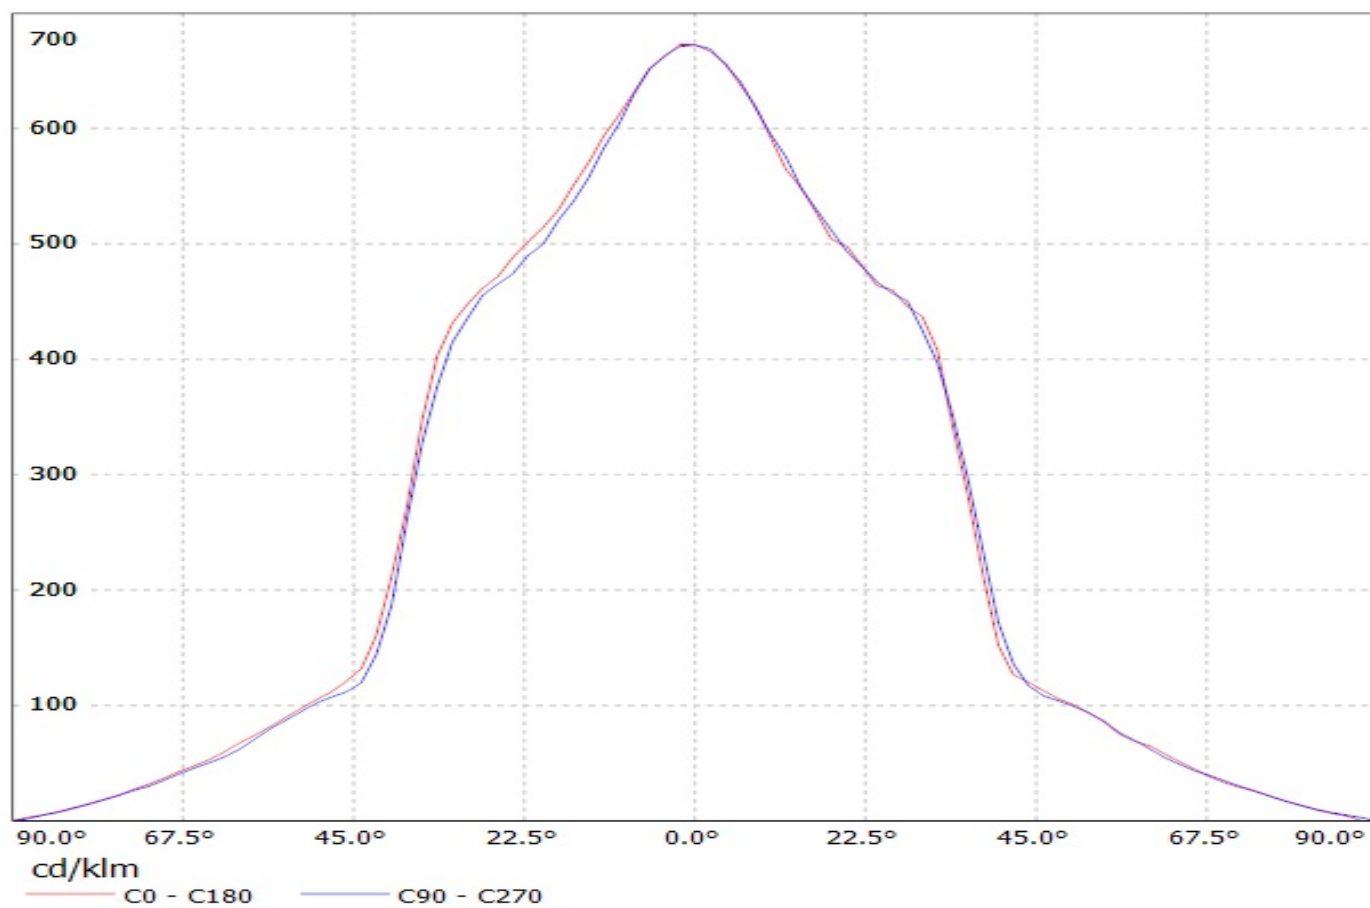


Luminaire: Ledil Oy CN12638_LENINA-S (Cree CXA20 698lm @ 250mA) Efficiency=88%
Lamps: 1 x Cree CXA20 698lm @ 250mA

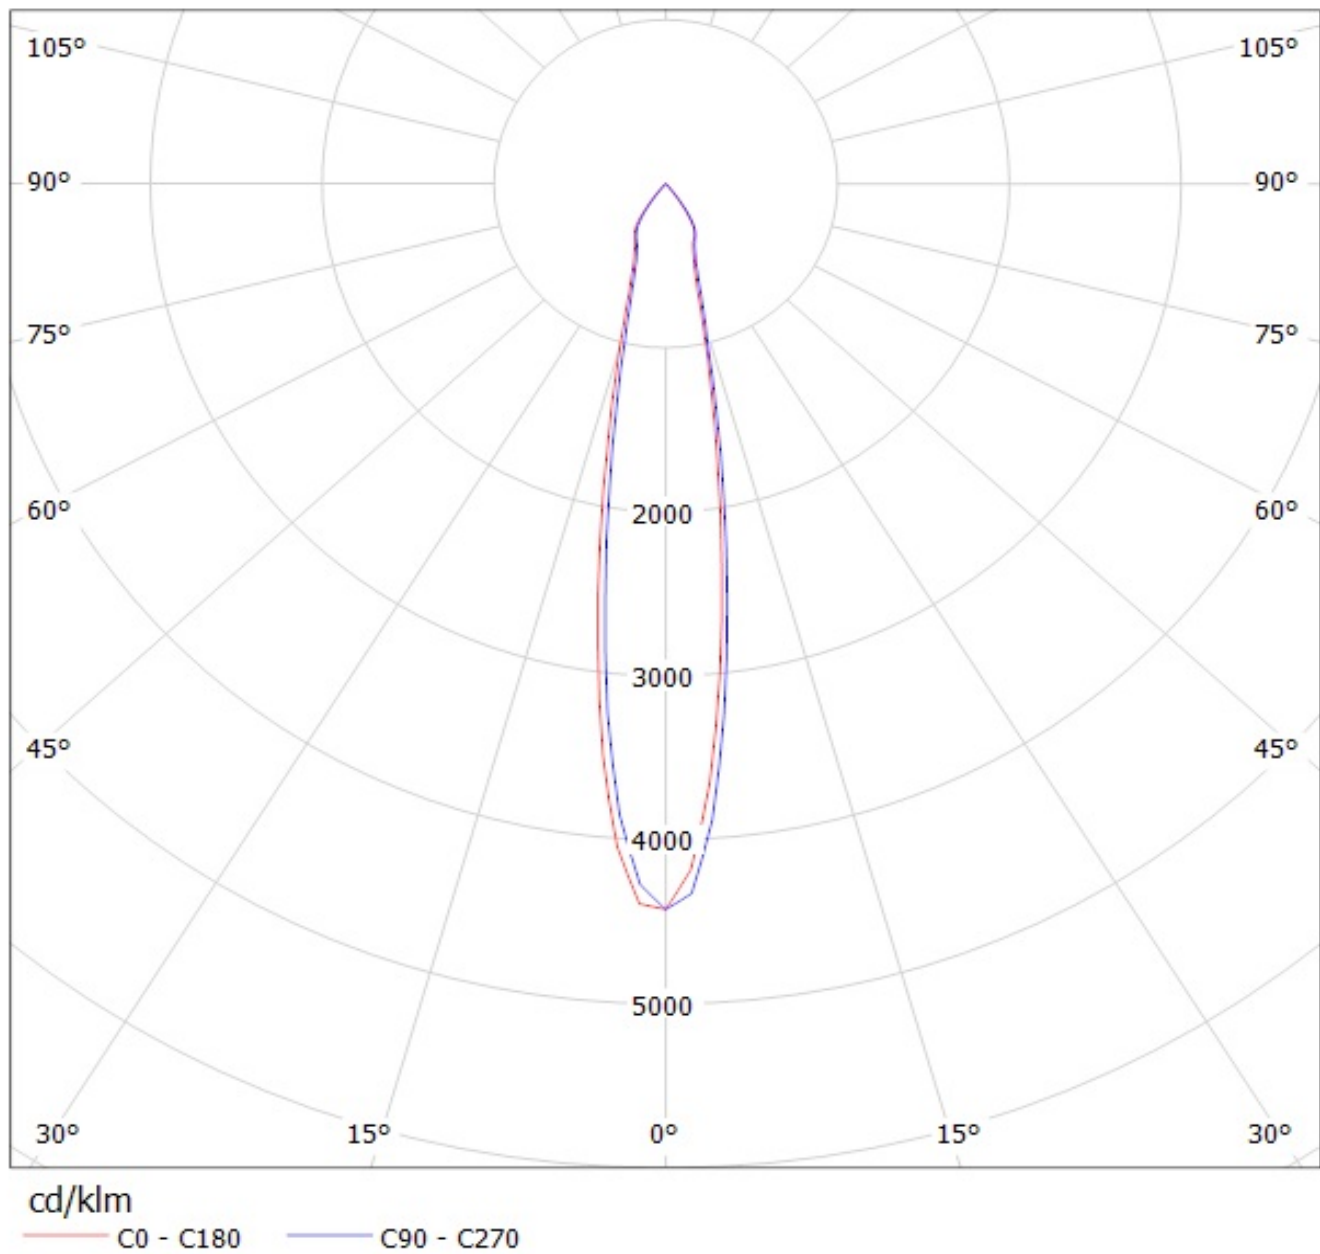

Luminaire: Ledil Oy CN12641_LENINA-S-DL (Cree CXA20 698lm @ 250mA) Efficiency=80%
Lamps: 1 x Cree CXA20 698lm @ 250mA

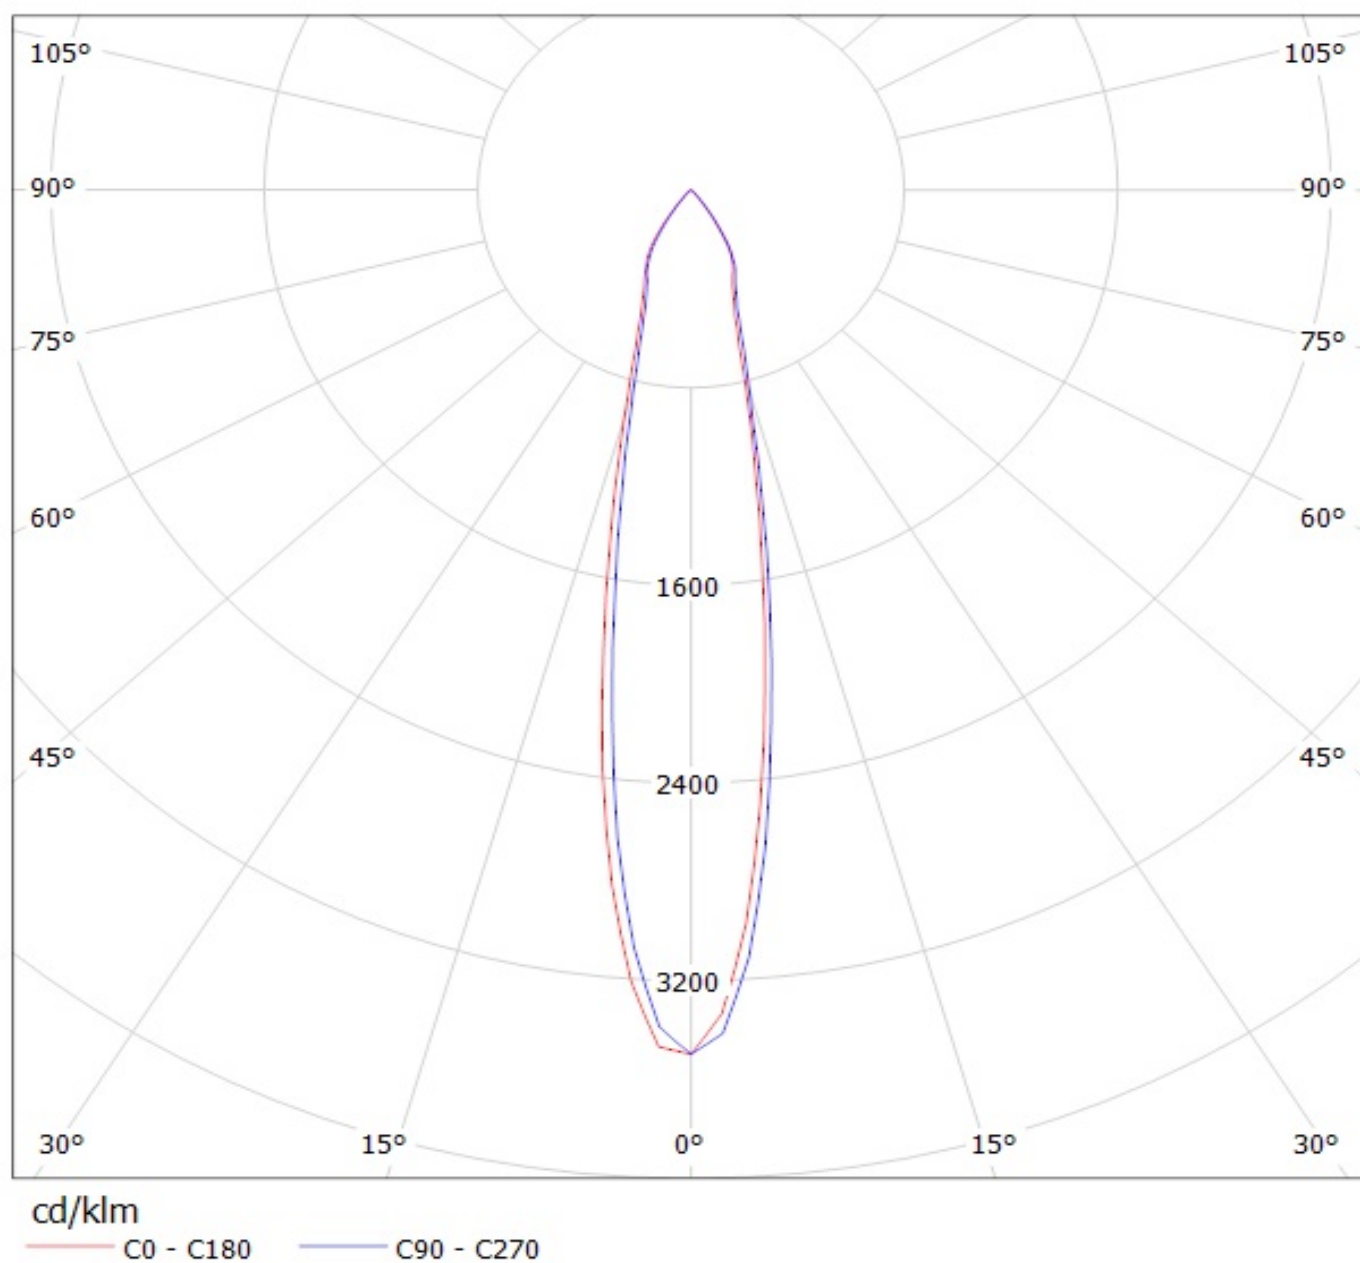

Luminaire: Ledil Oy CN12639_LENINA-M (Cree CXA20 698lm @ 250mA) Efficiency=85%
Lamps: 1 x Cree CXA20 698lm @ 250mA

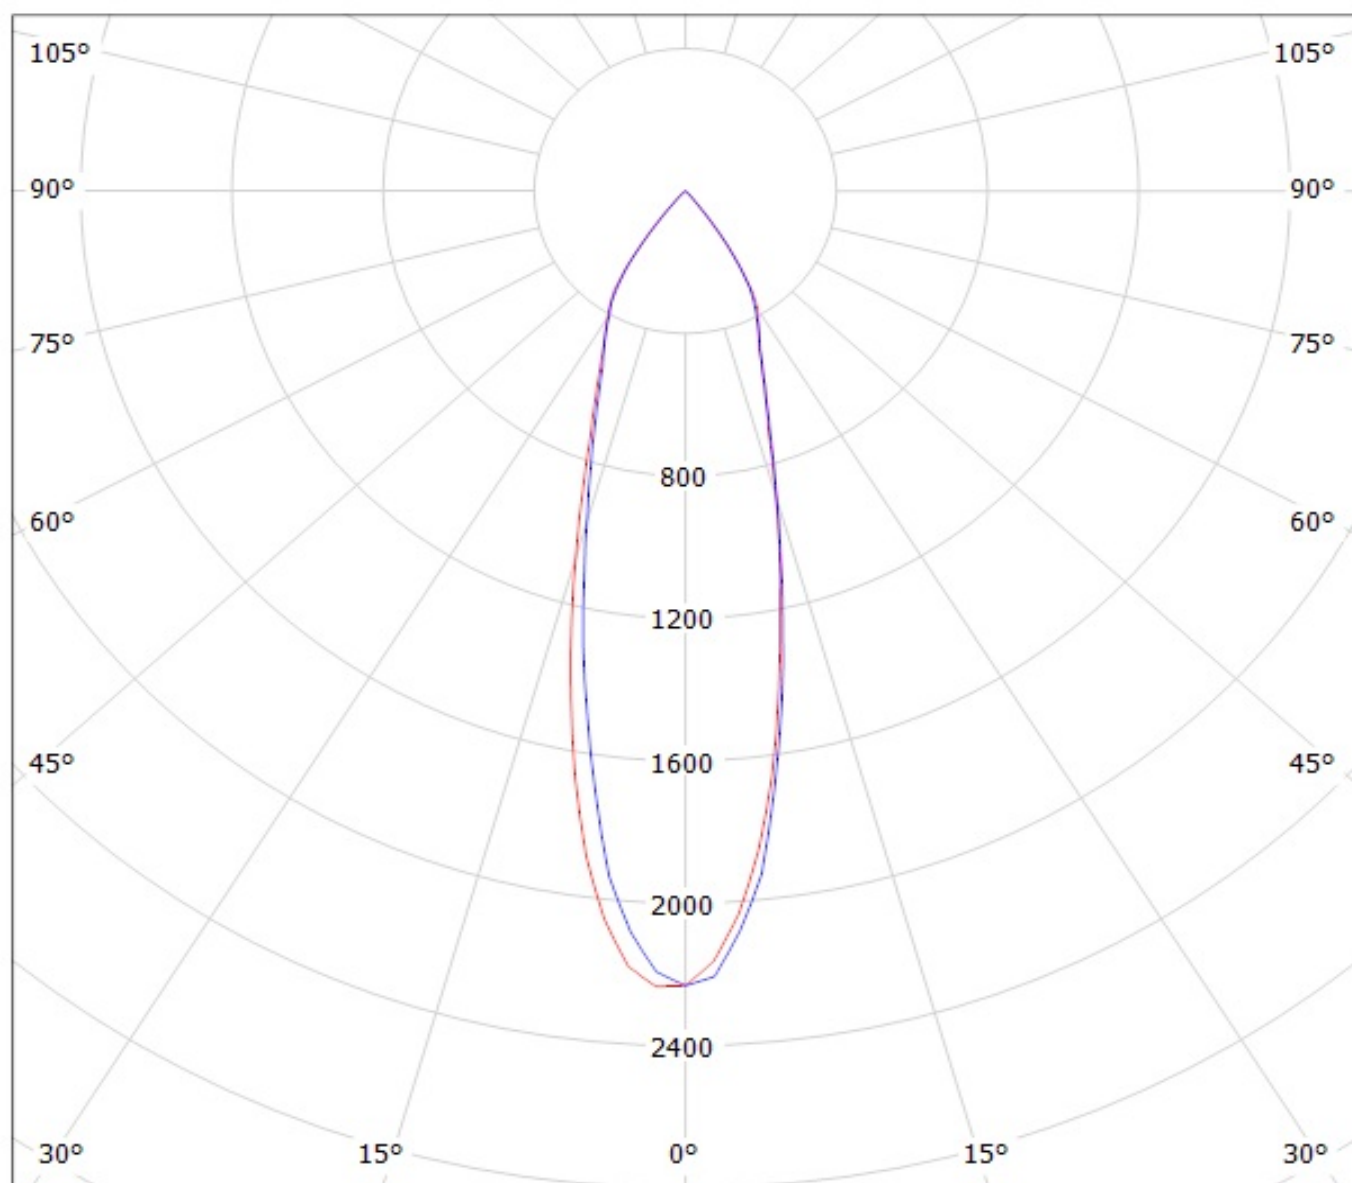


cd/klm


— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CN12642_LENINA-M-DL (Cree CXA20 698lm @ 250mA) Efficiency=77%
Lamps: 1 x Cree CXA20 698lm @ 250mA

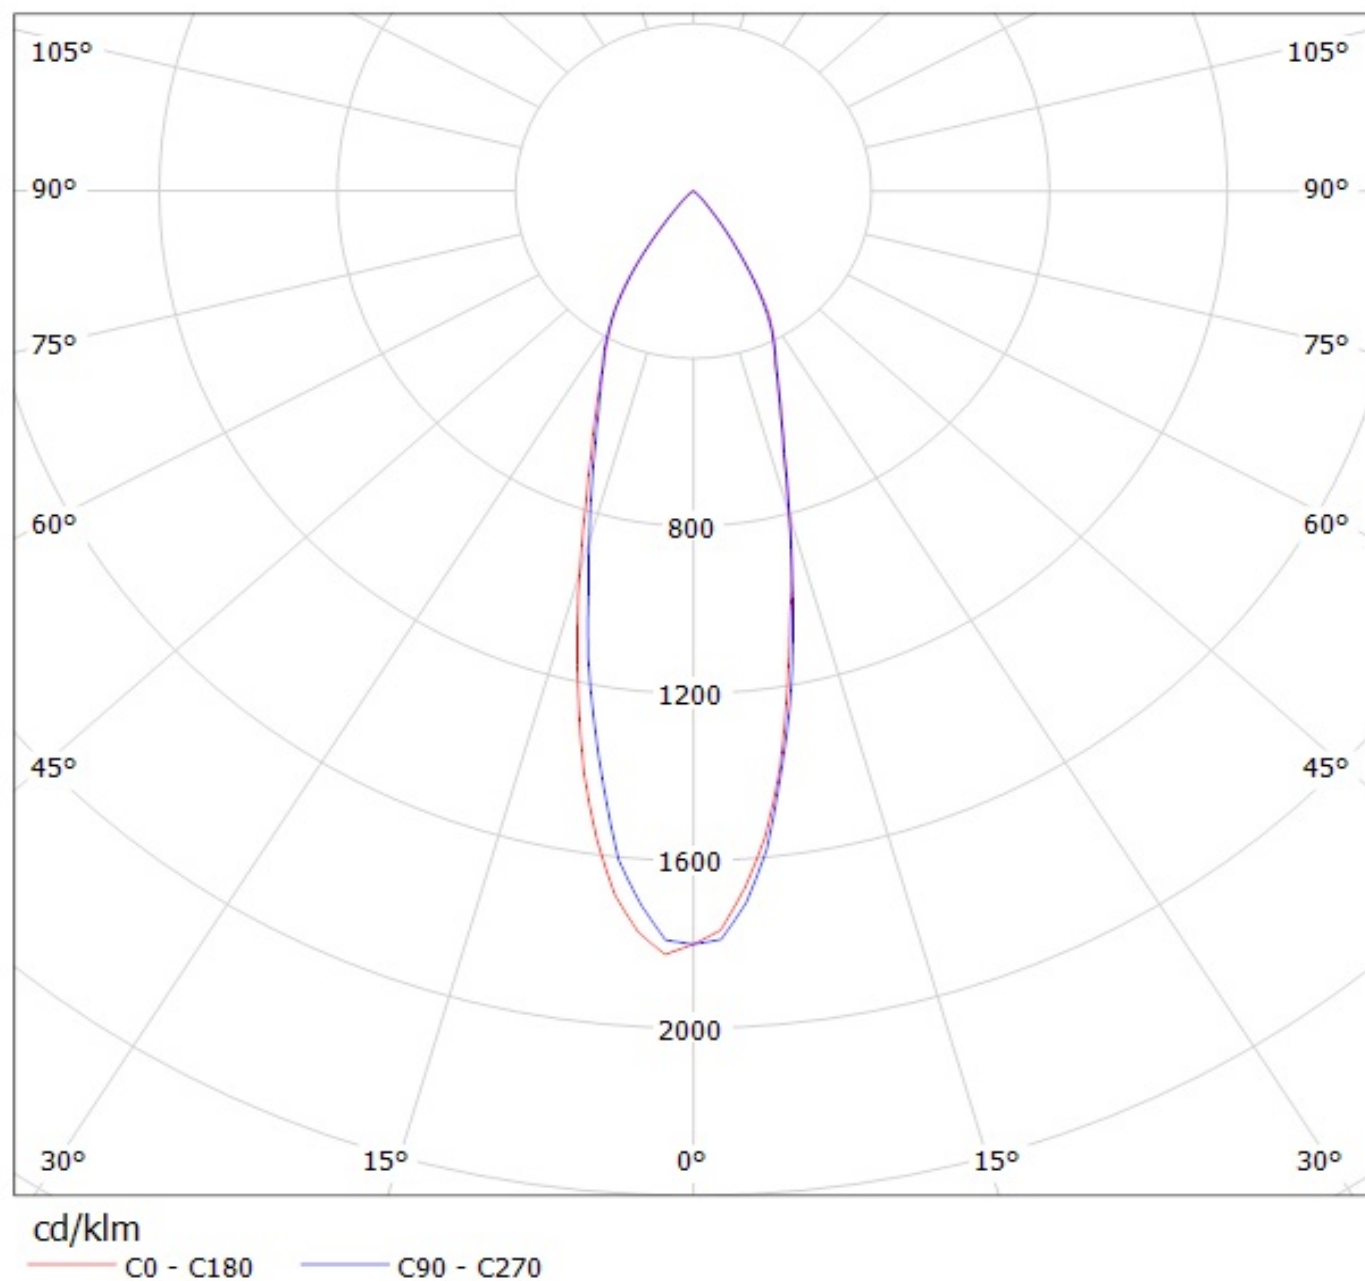

Luminaire: Ledil Oy CN12640_LENINA-W (Cree CXA20 698lm @ 250mA) Efficiency=86%
Lamps: 1 x Cree CXA20 698lm @ 250mA

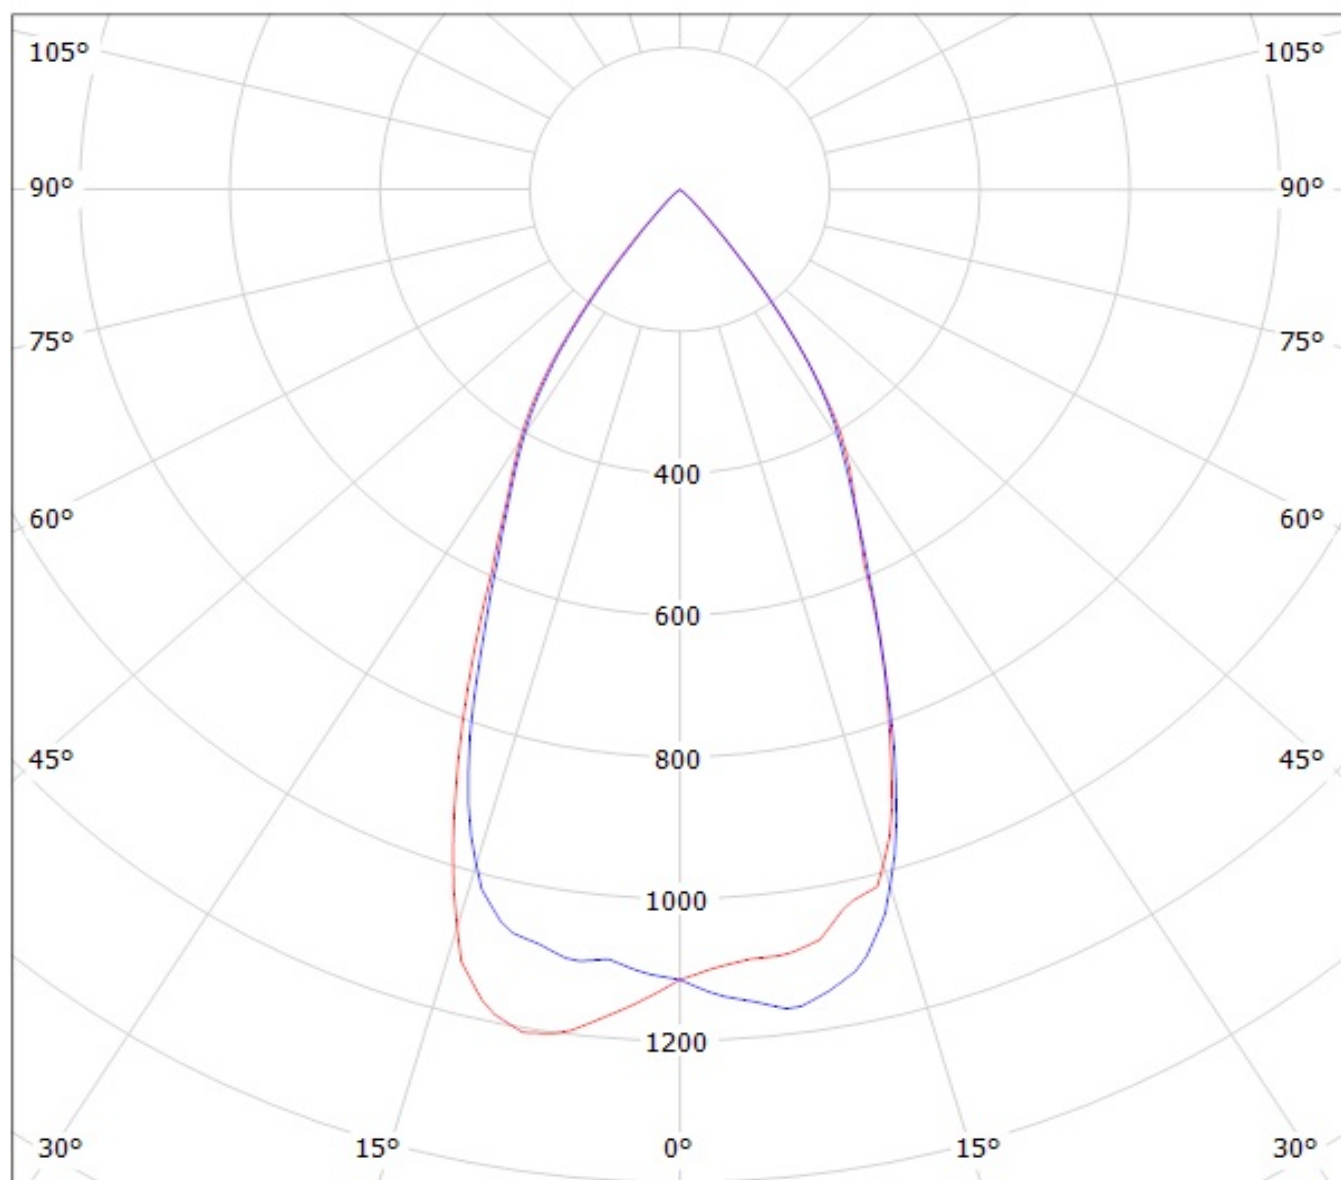


cd/klm


— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CN12643_LENINA-W-DL (Cree CXA20 698lm @ 250mA) Efficiency=78%
Lamps: 1 x Cree CXA20 698lm @ 250mA

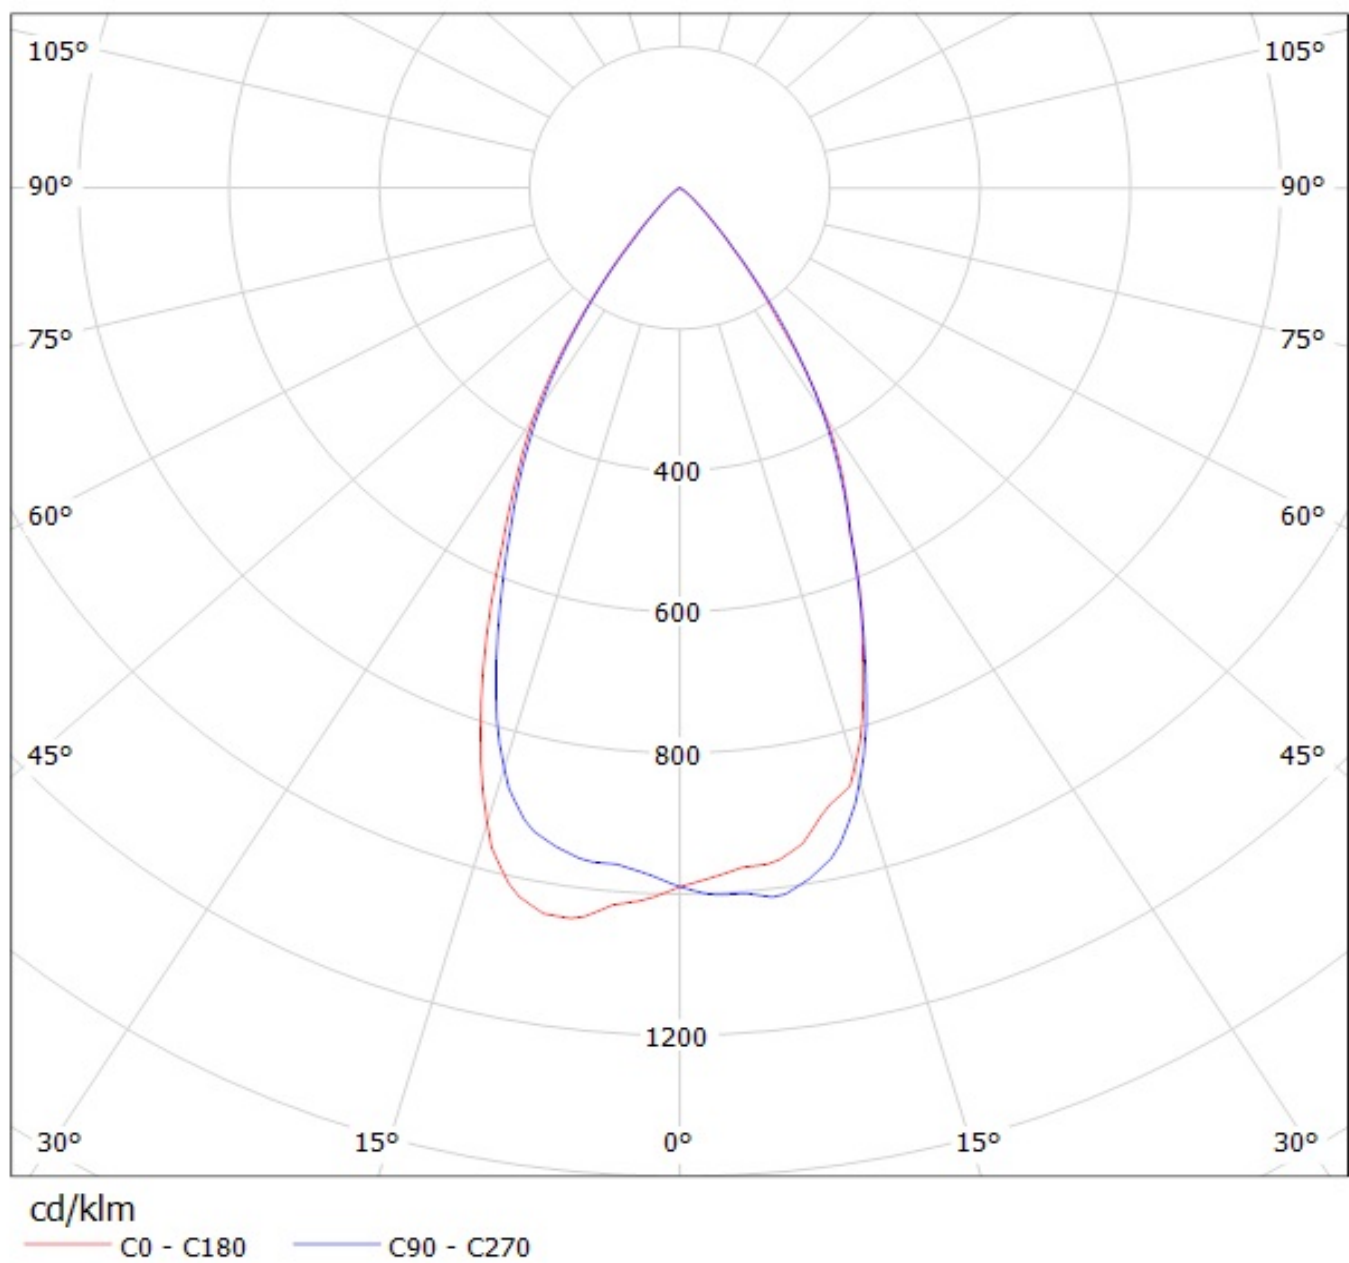

Luminaire: Ledil Oy CN12959_LENINA-XW (Cree CXA20 698lm @ 250mA) Efficiency=87%
Lamps: 1 x Cree CXA20 698lm @ 250mA

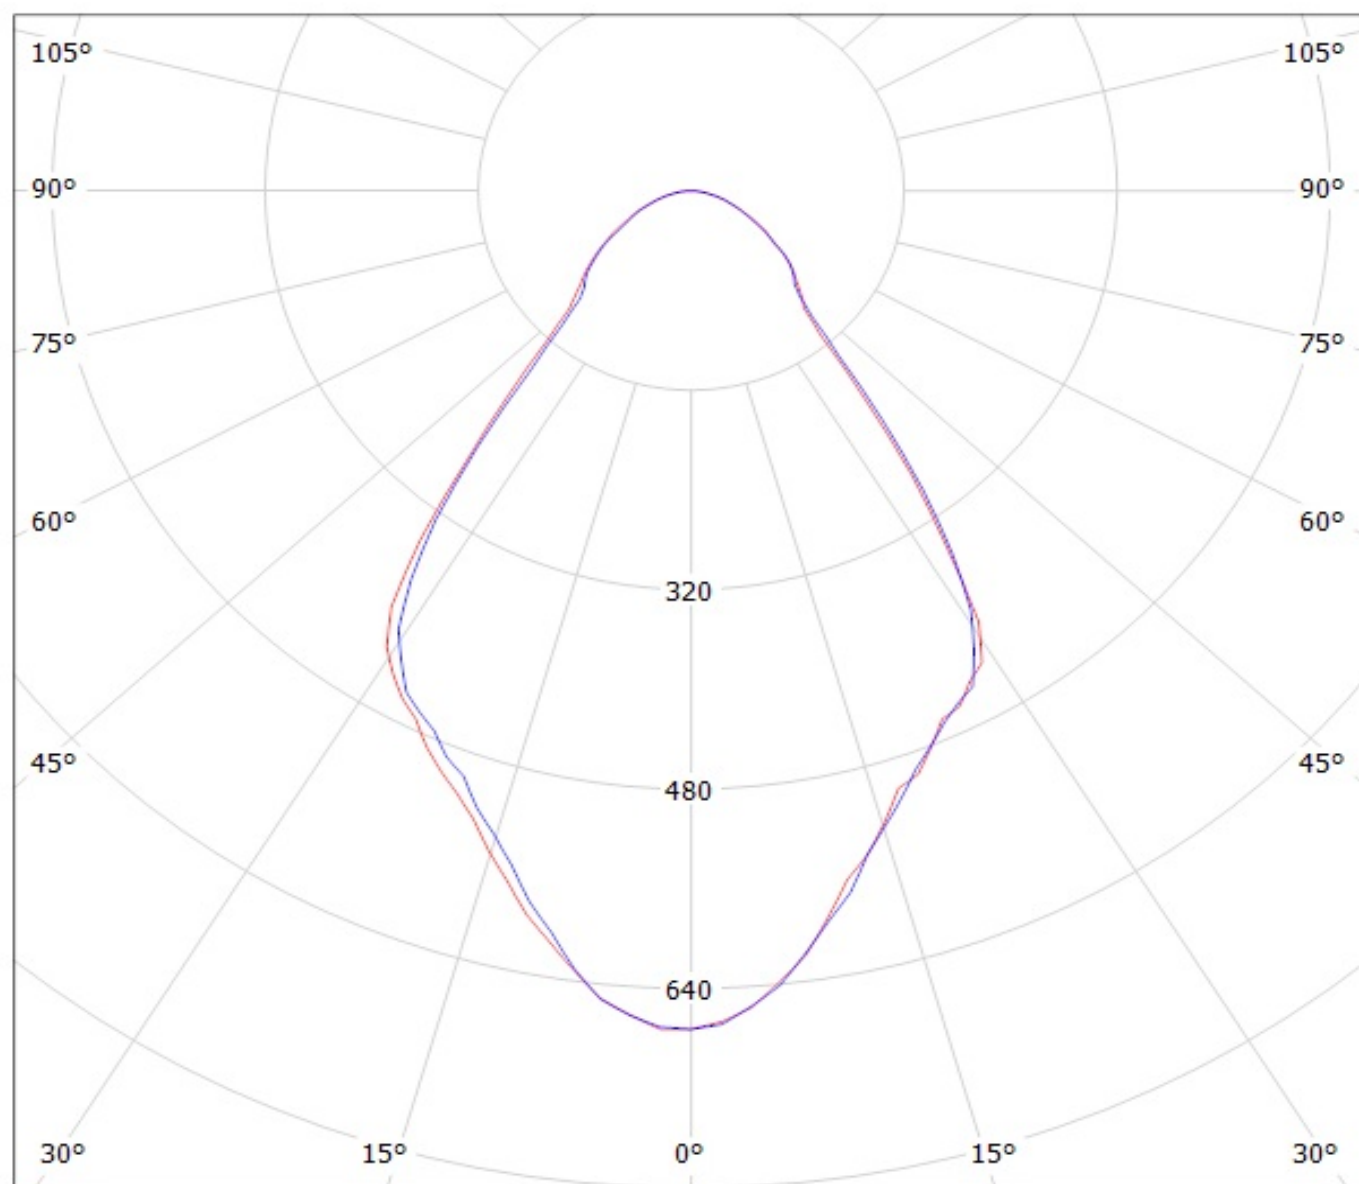

cd/klm

— C0 - C180

— C90 - C270