

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

FT

0

P

LTR

DESCRIPTION

DATE

DWN

APVD

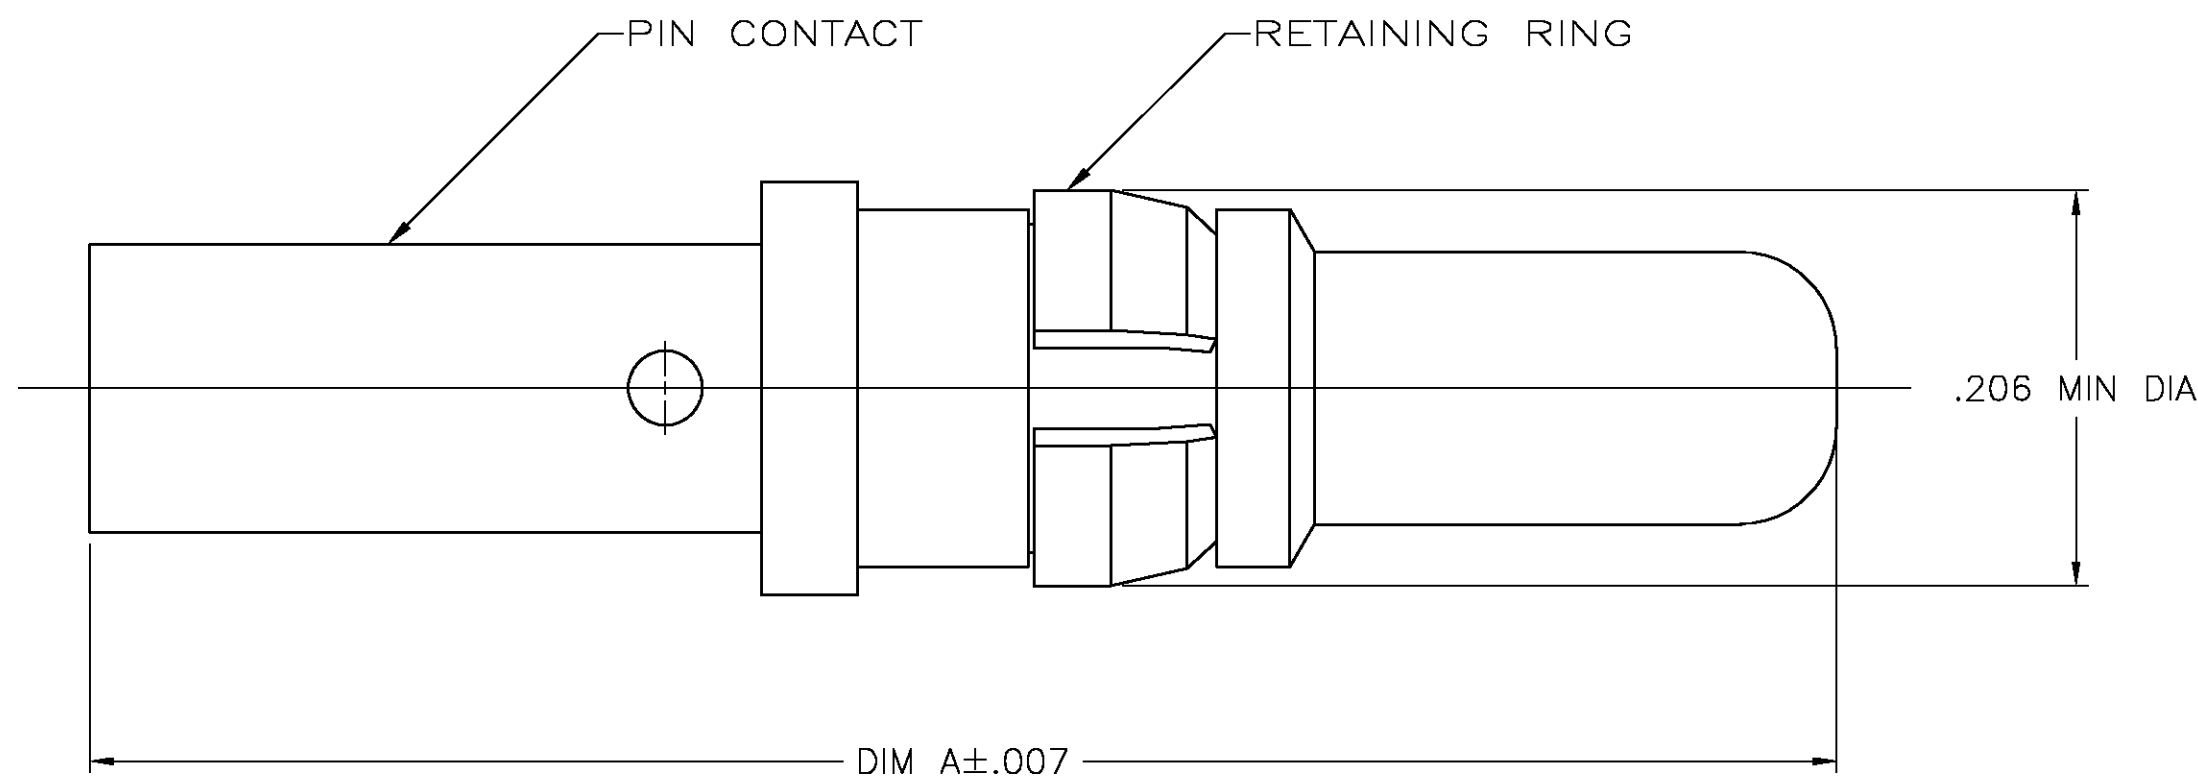
E

REVISED PER 0G3B-0280-05

3/16/05

SS

GS



1. WIRE BARREL WILL ACCEPT 12-14 AWG WIRE.




PIN CONTACT: BRASS.


RING RETAINING: PHOSPHOR BRONZE.

0.76 μm [.000030] MIN GOLD OVER1.27 μm [.000050] MIN NICKEL.1.27 μm [.000050] MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC $\pm$ -
1 PLC $\pm$ -
2 PLC $\pm$ -
3 PLC $\pm$.005
4 PLC $\pm$ -
ANGLES $\pm$ -

FINISH

PIN CONTACT: 3

RING RETAINING: 4

DWN 03/19/91

C DORWART

CHK 3-25-91

J McCLINTON

APVD 3-25-91

A TRAVIS

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME

PIN CONTACT ASSEMBLY,
POWER VIII, METRIMATE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-213662

SCALE 10:1

SHEET 1 OF 1

REV E