
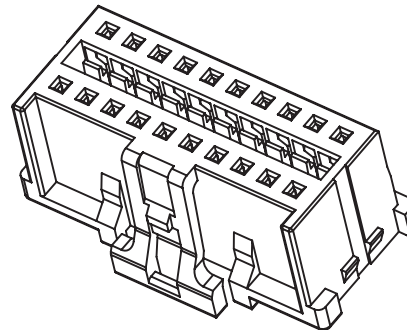
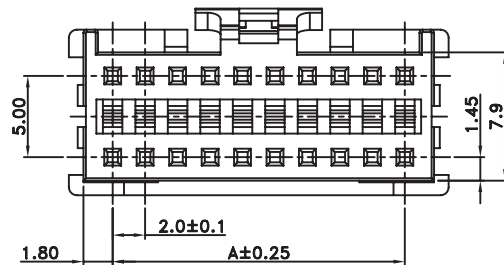

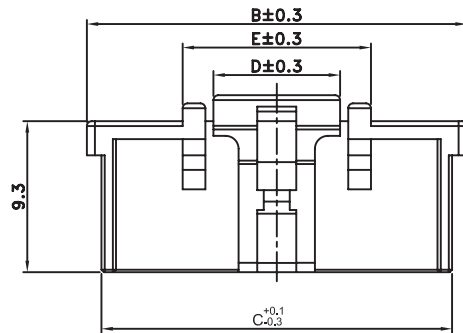
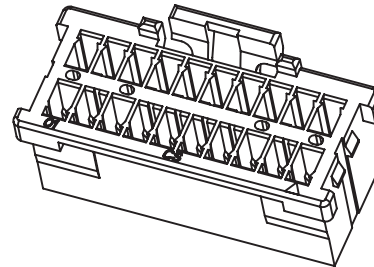


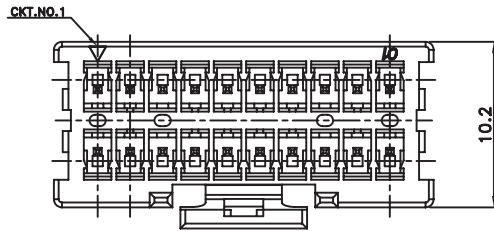

TECHNICAL CHARACTERISTICS


MATERIAL
INSULATOR: NY 66
FLAMABILITY RATING: UL94-V0
COLOR: WHITE
PITCH: 2.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN

PACKAGING
BAG

Poles	Dimension(mm)				
	A	B	C	D	E
4x2	6.0	11.4	9.6	4.7	8.4
5x2	8.0	13.4	11.6	4.7	8.4
6x2	10.0	15.4	13.6	7.8	11.6
7x2	12.0	17.4	15.6	7.8	11.6
8x2	14.0	19.4	17.6	7.8	11.6
9x2	16.0	21.4	19.6	7.8	11.6
10x2	18.0	23.4	21.6	7.8	11.6
11x2	20.0	25.4	23.6	7.8	11.6
12x2	22.0	27.4	25.6	7.8	11.6
13x2	24.0	29.4	27.6	7.8	11.6
14x2	26.0	31.4	29.6	7.8	11.6
15x2	28.0	33.4	31.6	7.8	11.6
16x2	30.0	35.4	33.6	7.8	11.6
17x2	32.0	37.4	35.6	7.8	11.6
18x2	34.0	39.4	37.6	7.8	11.6
19x2	36.0	41.4	39.6	7.8	11.6
20x2	38.0	43.4	41.6	7.8	11.6

				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
G								
F								
E								
D								
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: 2.00 MM DUAL ROW FEMALE TERMINAL HOUSING		SIZE A4
B	06-AUG-13	CHARACTERISTIC	QL		SCALE:			
A	15-MAY-12	PDF	GG		SHEET: 1/2	WERI PART NO: 6240xx213322		
REV	DATE	FILE	BY		DRAW: MIKE			



A diagram of an open box containing four bags of chips. Each bag is labeled with the number 4.

(c)



more
than you
expect

CyMIG 

WE 
WIRTSCHAFTS UNIVERSITÄT
WIEN VIENNA
UNIVERSITY OF
ECONOMICS
AND BUSINESS

face 2
face 4

				PROJECTION:	GENERAL TOLERANCE		
G					.X = $\pm$ 0.2	WÜRTH ELEKTRONIK	
F					.XX = $\pm$ 0.15		
E							
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: WTB 2.00MM DUAL ROWS TERMINAL HOUSING	SIZE A4
B					SCALE:		
A					SHEET: 2/2	WERI PART NO: 624 0xx 213 322	
REV	DATE	FILE	BY		DRAW: MIKE		