

TD62783AP, TD62783AFW, TD62784AP, TD62784AFW

8CH HIGH-VOLTAGE SOURCE DRIVER

The TD62783AP / AFW Series are comprised of eight source current Transistor Array.

These drivers are specifically designed for fluorescent display applications.


Applications include relay, hammer and lamp drivers.

FEATURES


- High output voltage Type-AP, AFW : $V_{CC} = 50V$ MIN.
- Output current (single output) $I_{OUT} = -500mA$ MIN.
- Output clamp diodes
- Single supply voltage
- Input compatible with various types of logic
- Package Type-AP : DIP-18pin
- Package Type-AFW : SOL-18pin

TYPE	DESIGNATION
TD62783AP / AFW	TTL, 5V CMOS
TD62784AP / AFW	6~15V PMOS, CMOS


PIN CONNECTION (TOP VIEW)

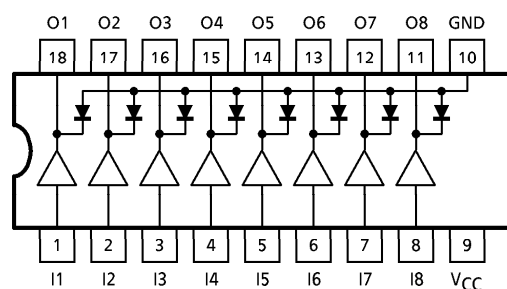

SCHEMATICS (EACH DRIVER)

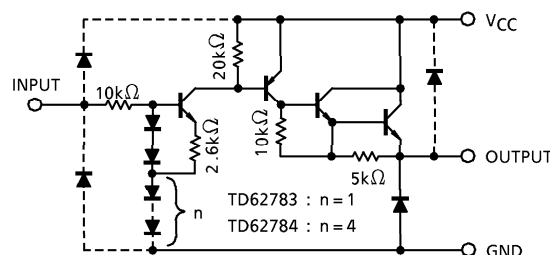

(Note) The input and output parasitic diodes cannot be used as clamp diodes.

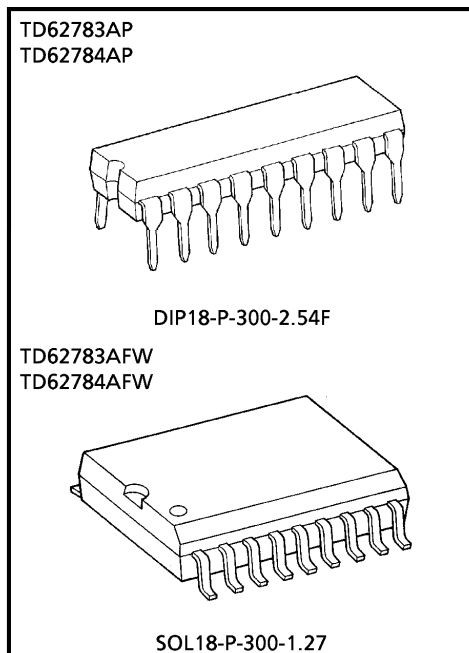

Weight
 DIP18-P-300-2.54F : 1.478g (Typ.)
 SOL18-P-300-1.27 : 0.48g (Typ.)

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	50	V
Output Current	I _{OUT}	– 500	mA / ch
Input Voltage	V _{IN} (Note 1)	15	V
	V _{IN} (Note 2)	30	
Clamp Diode Reverse Voltage	V _R	50	V
Clamp Diode Forward Current	I _F	500	mA
Power Dissipation	AP	1.47	W
	AFW		
Operating Temperature	T _{opr}	– 40~85	°C
Storage Temperature	T _{stg}	– 55~150	°C

(Note 1) Only TD62783AP / AFW

(Note 2) Only TD62784AP / AFW

(Note 3) On Glass Epoxy PCB (75×114×1.6mm Cu 20%)

RECOMMENDED OPERATING CONDITIONS (Ta = – 40~85°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{CC}	—	—	—	50	V
Output Current	I _{OUT}	Ta = 85°C T _j = 120°C T _{pw} = 25ms	—	—	– 260	mA / ch
					– 59	
					– 180	
					– 38	
Input Voltage	TD62783AP / AFW	V _{IN}	—	—	12	V
	TD62784AP / AFW		—	—	24	
Input Voltage	Output On	V _{IN} (ON)	—	2.0	5.0	V
	Output On		—	4.5	12.0	
	Output Off	V _{IN} (OFF)	—	0	—	
			—	0	—	
Clamp Diode Reverse Voltage	AP	V _R	—	—	50	V
	AFW		—	—	35	
Clamp Diode Forward Current	I _F	—	—	—	400	mA
Power Dissipation	AP	P _D	Ta = 85°C	—	0.76	W
	AFW		Ta = 85°C (Note)	—	0.48	

(Note) On Glass Epoxy PCB (75×114×1.6mm Cu 20%)

961001EBA2'


- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Leakage Current		I _{CEX}	1	V _{CC} = V _{CC} MAX. V _{IN} = 0.4V Ta = 25°C	—	—	100	μA
Output Saturation Voltage		V _{CE} (sat)	2	V _{IN} = V _{IN} (ON), I _{OUT} = - 350mA	—	—	2.0	V
				V _{IN} = V _{IN} (ON), I _{OUT} = - 225mA	—	—	1.9	
				V _{IN} = V _{IN} (ON), I _{OUT} = - 100mA	—	—	1.8	
Input Current	TD62783AP / AFW	I _{IN} (ON)	3	V _{IN} = 2.4V	—	36	52	μA
				V _{IN} = 3.85V	—	180	260	
	TD62784AP / AFW			V _{IN} = 5V	—	92	130	
				V _{IN} = 12V	—	790	1130	
Input Voltage	TD62783AP / AFW	V _{IN} (ON)	4	V _{CE} = 2.0V	—	—	2.0	V
	TD62784AP / AFW			I _{OUT} = - 350mA	—	—	4.5	
	TD62783AP / AFW	V _{IN} (OFF)		I _{OUT} = - 500μA	0.8	—	—	
	TD62784AP / AFW				2.0	—	—	
Supply Current		I _{CC} (ON)	3	V _{IN} = V _{IN} (ON), V _{CC} = 50V	—	—	2.5	mA / ch
Clamp Diode Reverse Current		I _R	5	V _R = 50V	—	—	50	μA
Clamp Diode Forward Voltage		V _F	6	I _F = 350mA	—	—	2.0	V
Turn-On Delay		t _{ON}	7	V _{CC} = V _{CC} MAX. R _L = 125Ω C _L = 15pF, R _L = 88Ω (F)	—	0.15	—	μs
Turn-Off Delay		t _{OFF}			—	1.8	—	

TEST CIRCUIT


1. I_{CEX}




2. $V_{CE(sat)}$




3. $I_{IN(ON)}$, I_{CC}




4. $V_{IN(ON)}$, $V_{IN(OFF)}$





5. I_R



6. V_F









7. t_{ON} , t_{OFF}

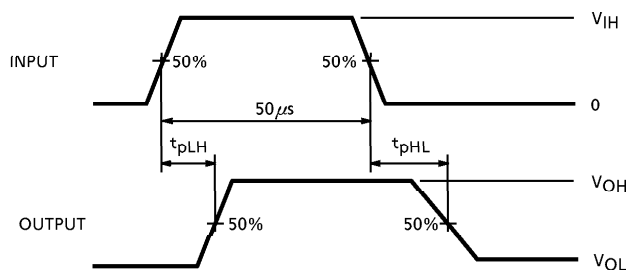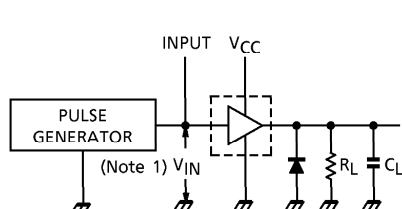


- (Note 1) Pulse width $50\mu s$, duty cycle 10%
Output impedance 50Ω , $t_r \leq 5ns$, $t_f \leq 10ns$
(Note 2) C_L includes probe and jig capacitance

PRECAUTIONS for USING


Utmost care is necessary in the design of the output line, V_{CC} and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

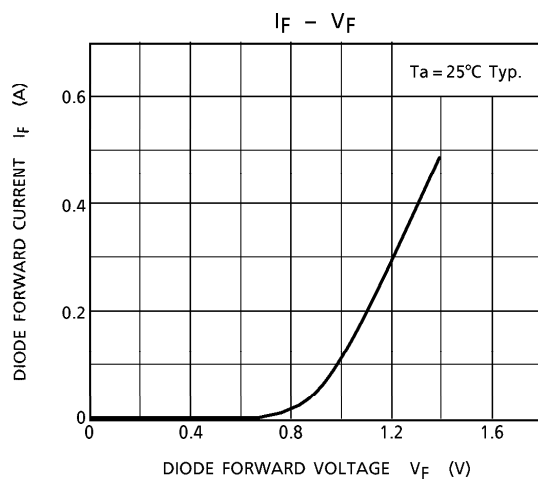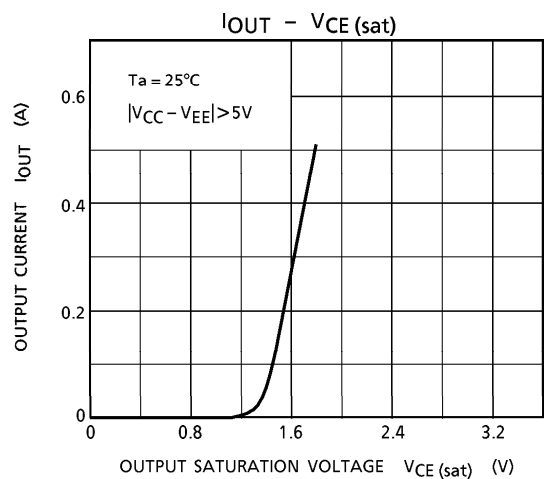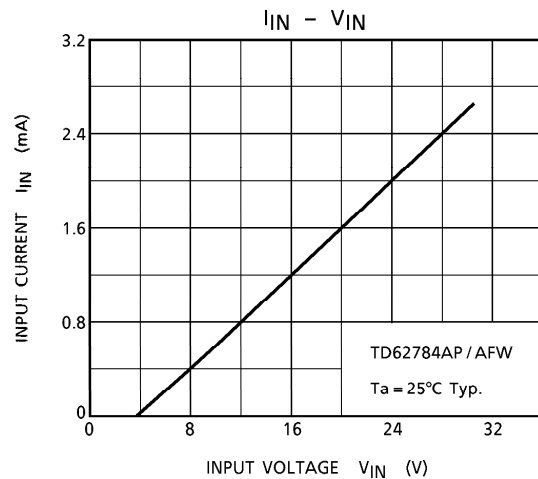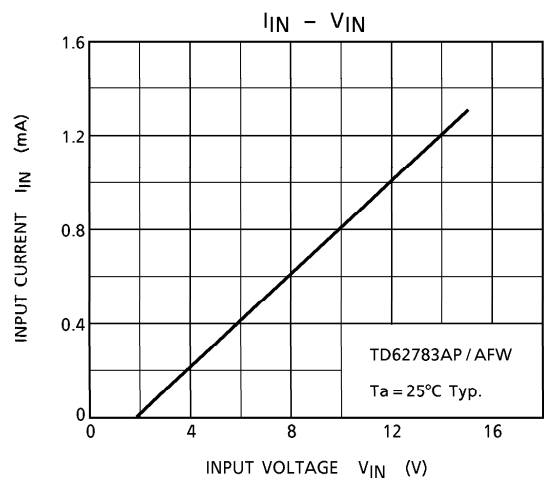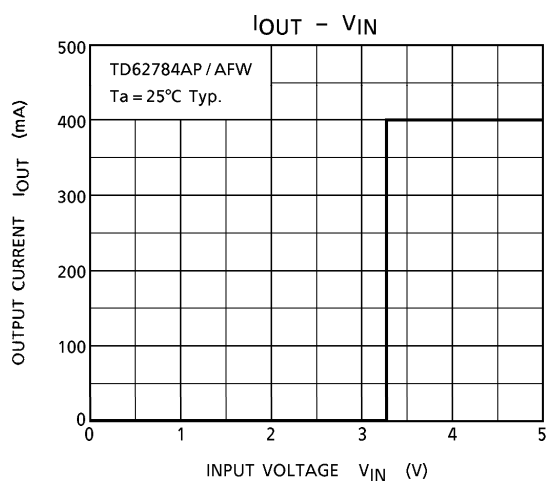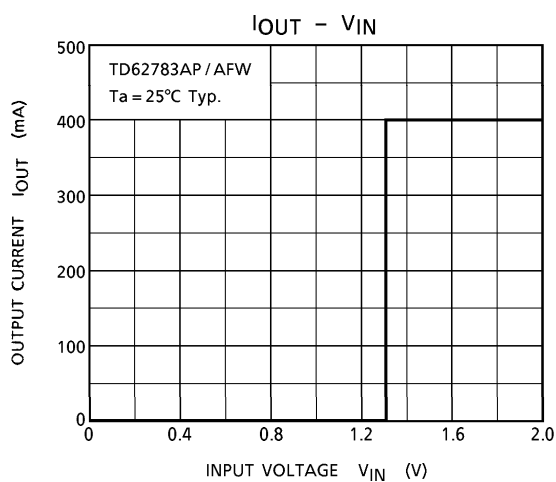

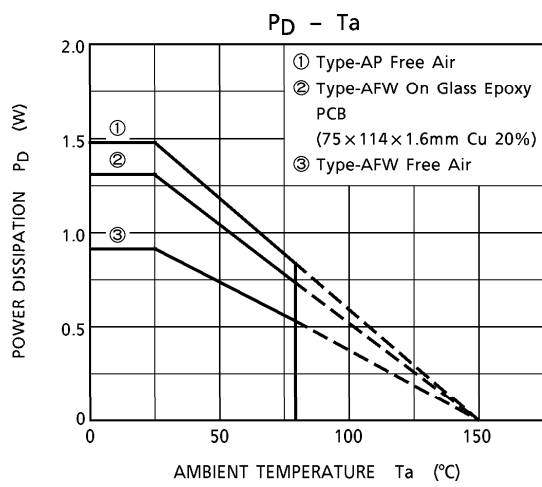

OUTLINE DRAWING
DIP18-P-300-2.54F


Unit : mm

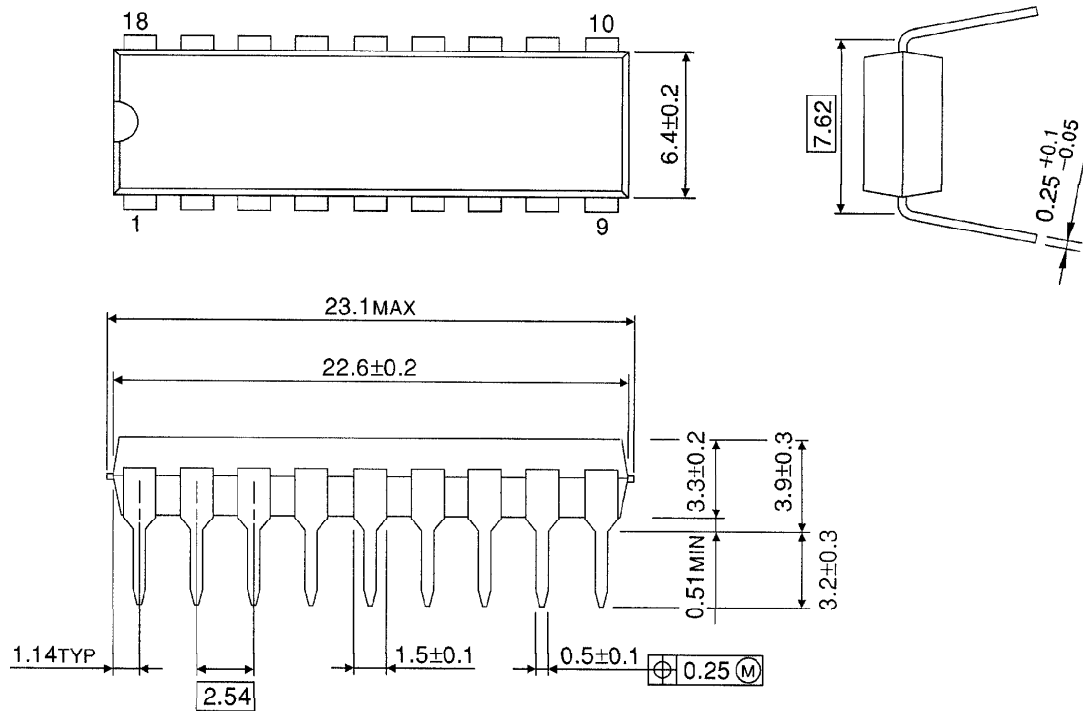

Weight : 1.478g (Typ.)

OUTLINE DRAWING
SOL18-P-300-1.27

Unit : mm

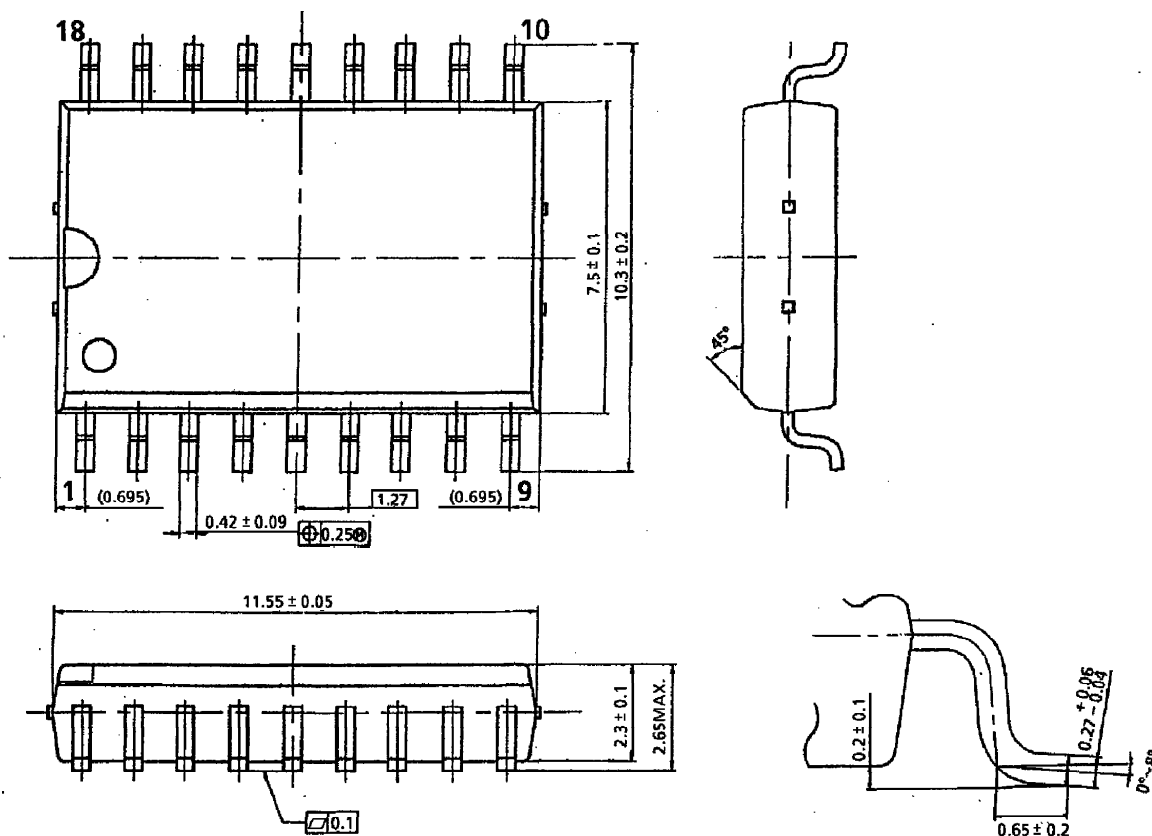

Weight : 0.48g (Typ.)