
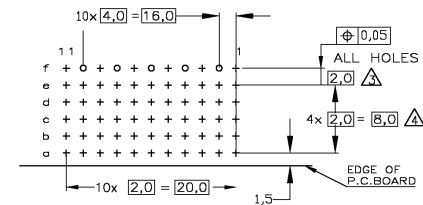
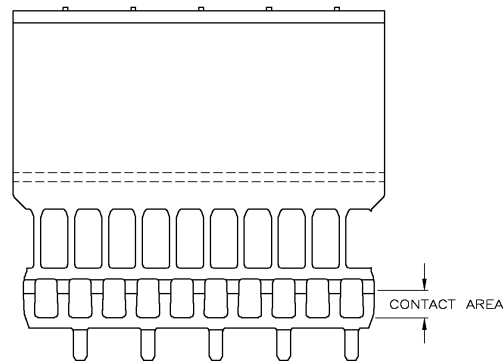
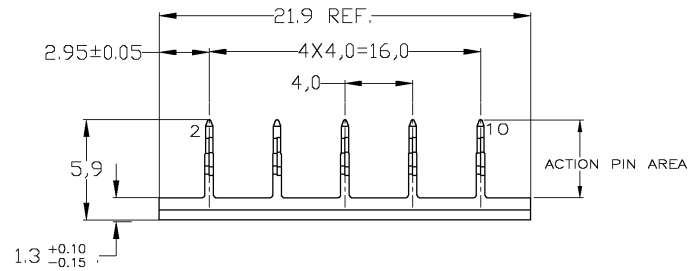


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION

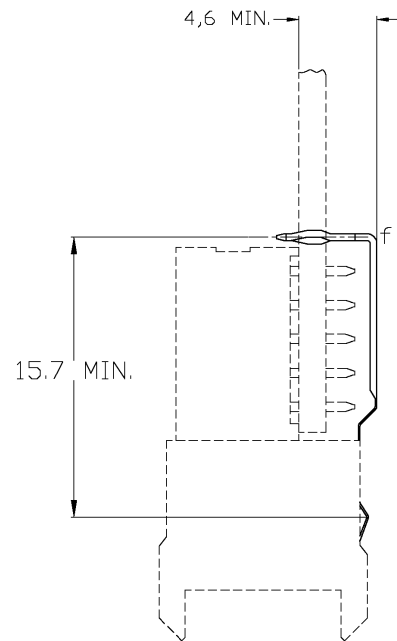

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FIN. HOLE 0,55 TO 0,65 mm
OTHER REQUIREMENTS SEE
APPLICATION SPECIFICATION
114-19029

NOTES:

- △ PLATING:
CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
ACTION PIN : 0,5µm TIN MIN.
REMAINDER : Ni
 - △ MATERIAL: PHOSPHORBRONZE.
 - △ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH
UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
5 MAX. BOARD THICKNESS 3,5 mm.
 - △ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

								352112-9	
								352112-2	
FINISH				MATERIAL				PARTNUMBER	
-	-	-	-	CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED	
-	-	-	-						
D SR10-0117-03 DP -				© COPYRIGHT 19 86 BY AMP-HOLLAND B.V.					
C SR10-0293-02 DP -				ALL INTERNATIONAL RIGHTS RESERVED-AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN -AND/OR PATENTS PENDING.					
				THIS DRAWING IS UNPUBLISHED					
				RELEASED FOR PUBLICATION					
B SR10-0518-01 BL FB				06/12/01		tyco Electronics		Tyco Electronics Corp. Oostkamp, Belgium.	
A EH-1666-99 WvdH FVK				09-11-99		NAME		Z-PACK 2mm HM	
O EH-0948-96 DT WvdH				28-11-98				GROUND RETURN LOWERSHEET	
LTRL. REVISION RECORD				DR. CHK. DATE				TYPE C/M	
DR.: D. THUREN		CHK.: W.v.d. HEIJDEN		APP.: F.v.d. HONIGSBURG		DWG.No.		REV.LTR	
DATE: 28-11-96		DATE: 28-11-96		DATE: -		C-352112		SHEET 10f 1	
								A2	