

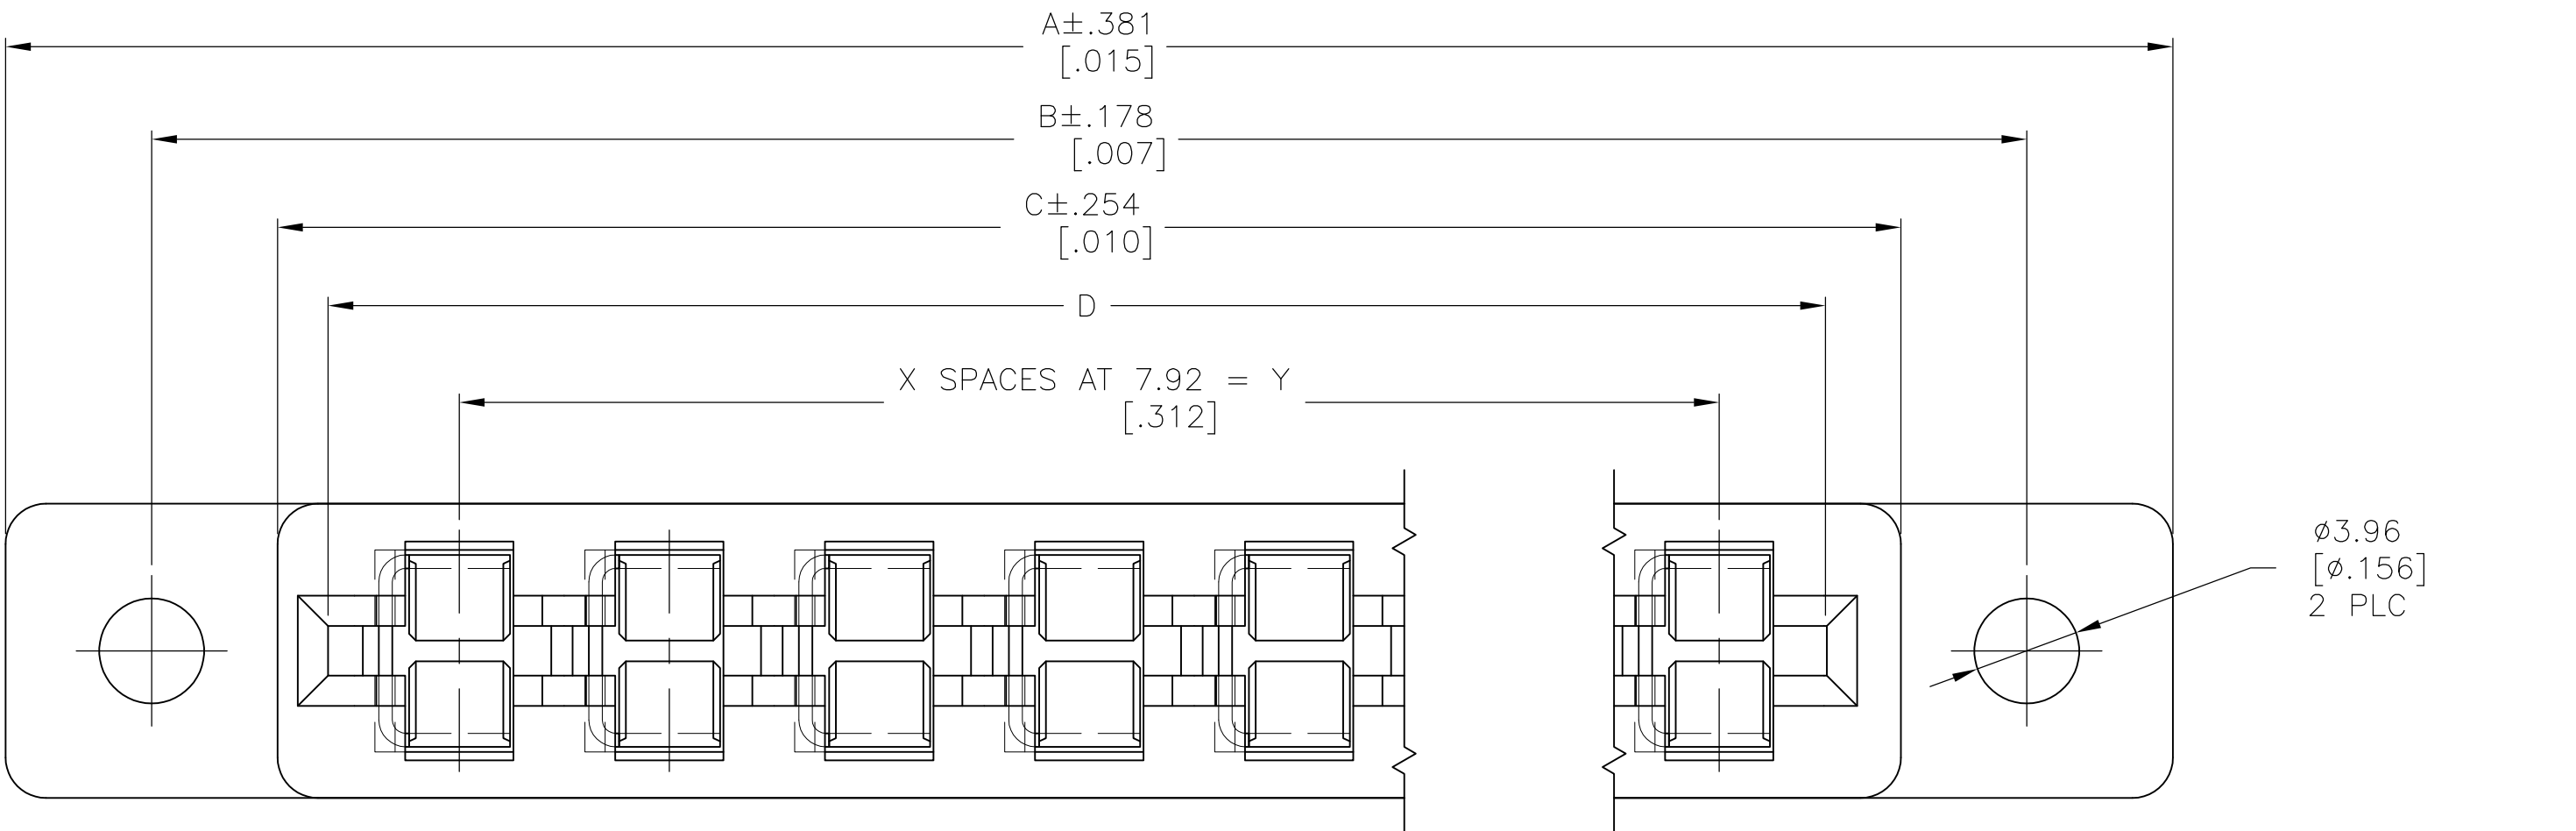
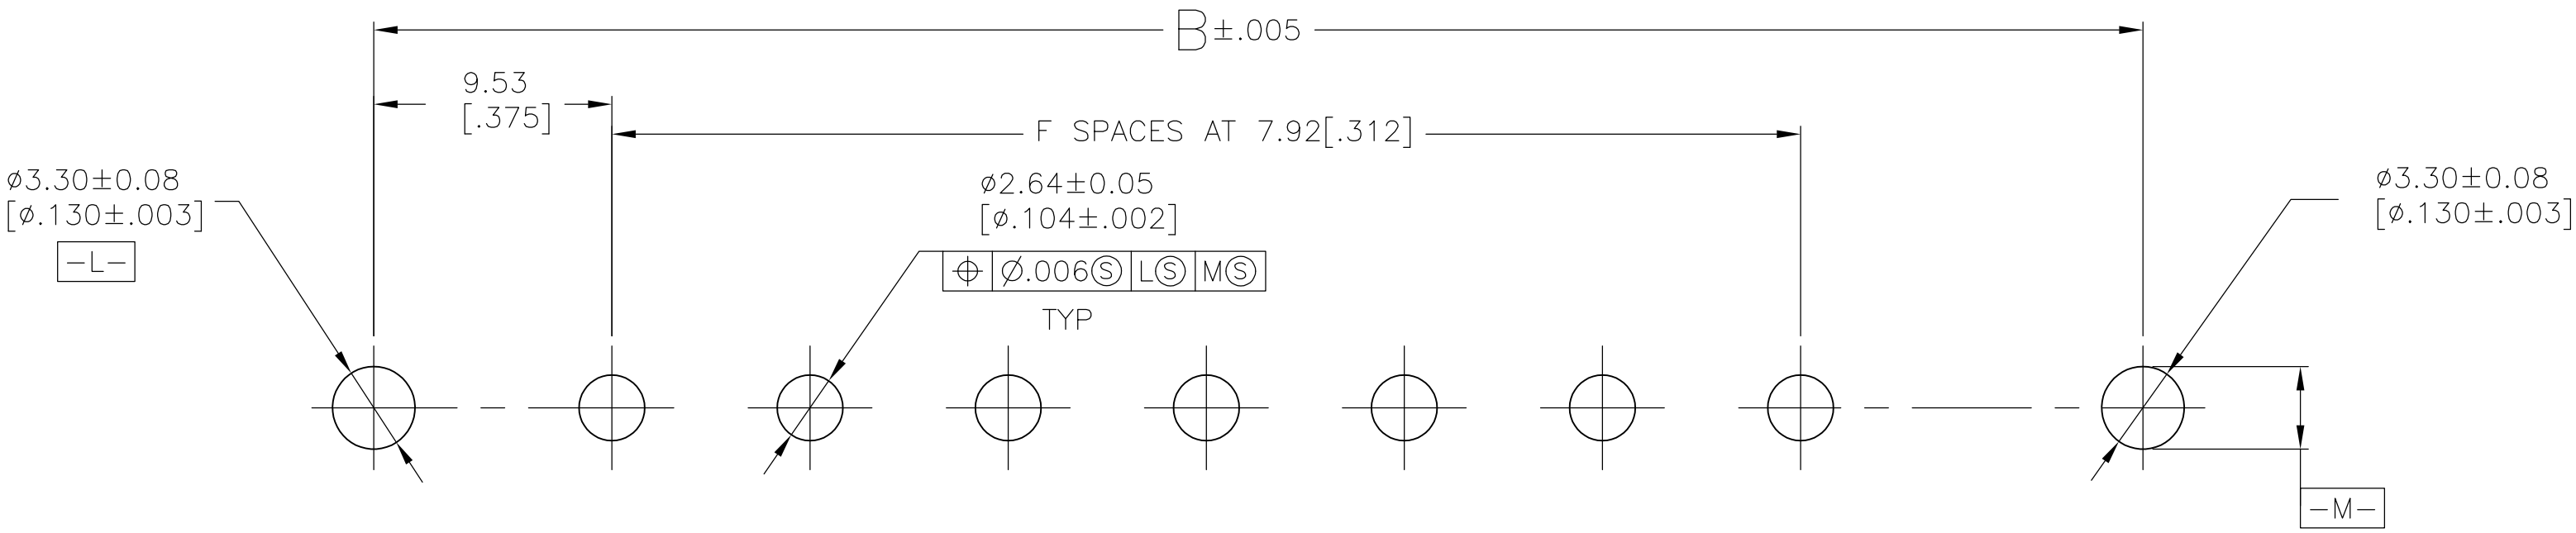
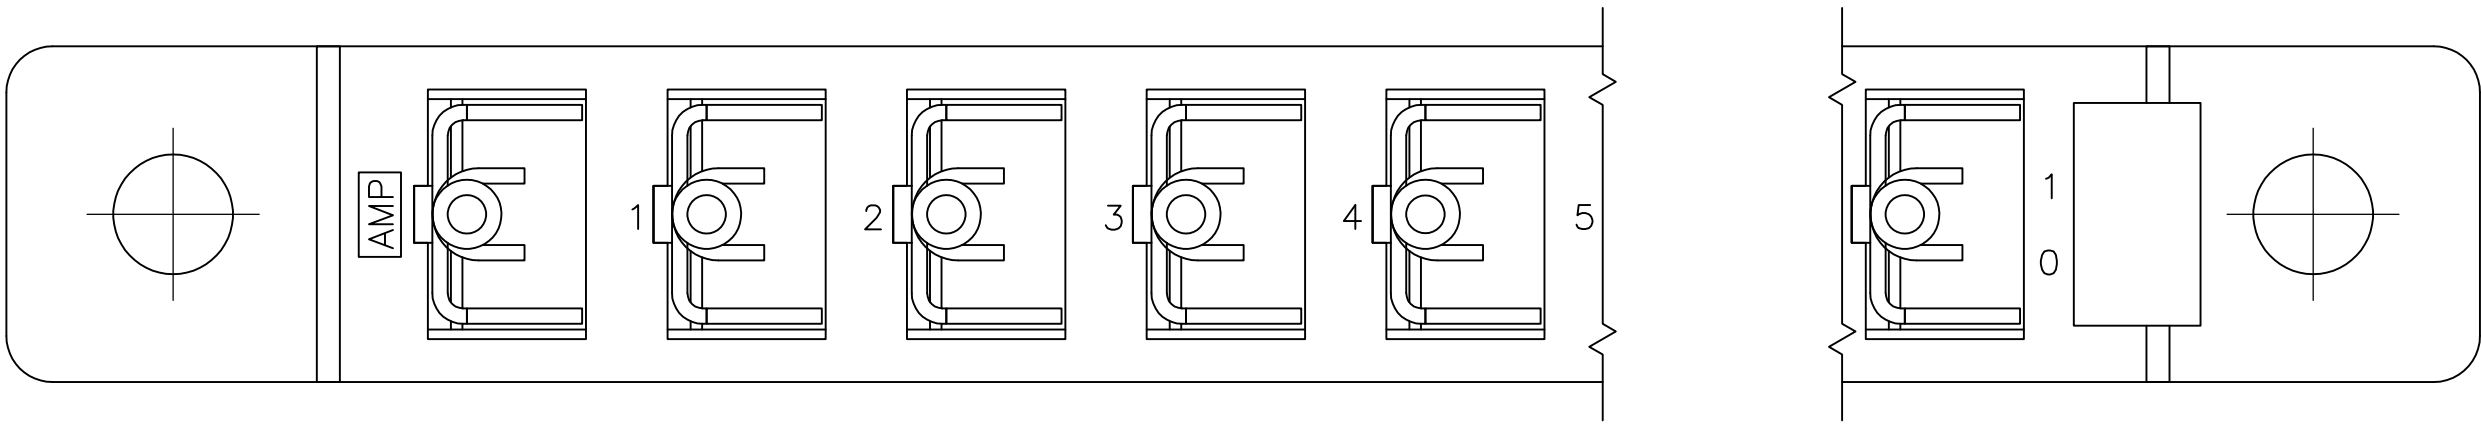


LOC		DIST		REVISONS			
P	T	LTR	DESCRIPTION	DATE	DWN	APVD	
AD		00					
	J		REVISED PER ECO-14-014458	24SEP2014	NK	MM	

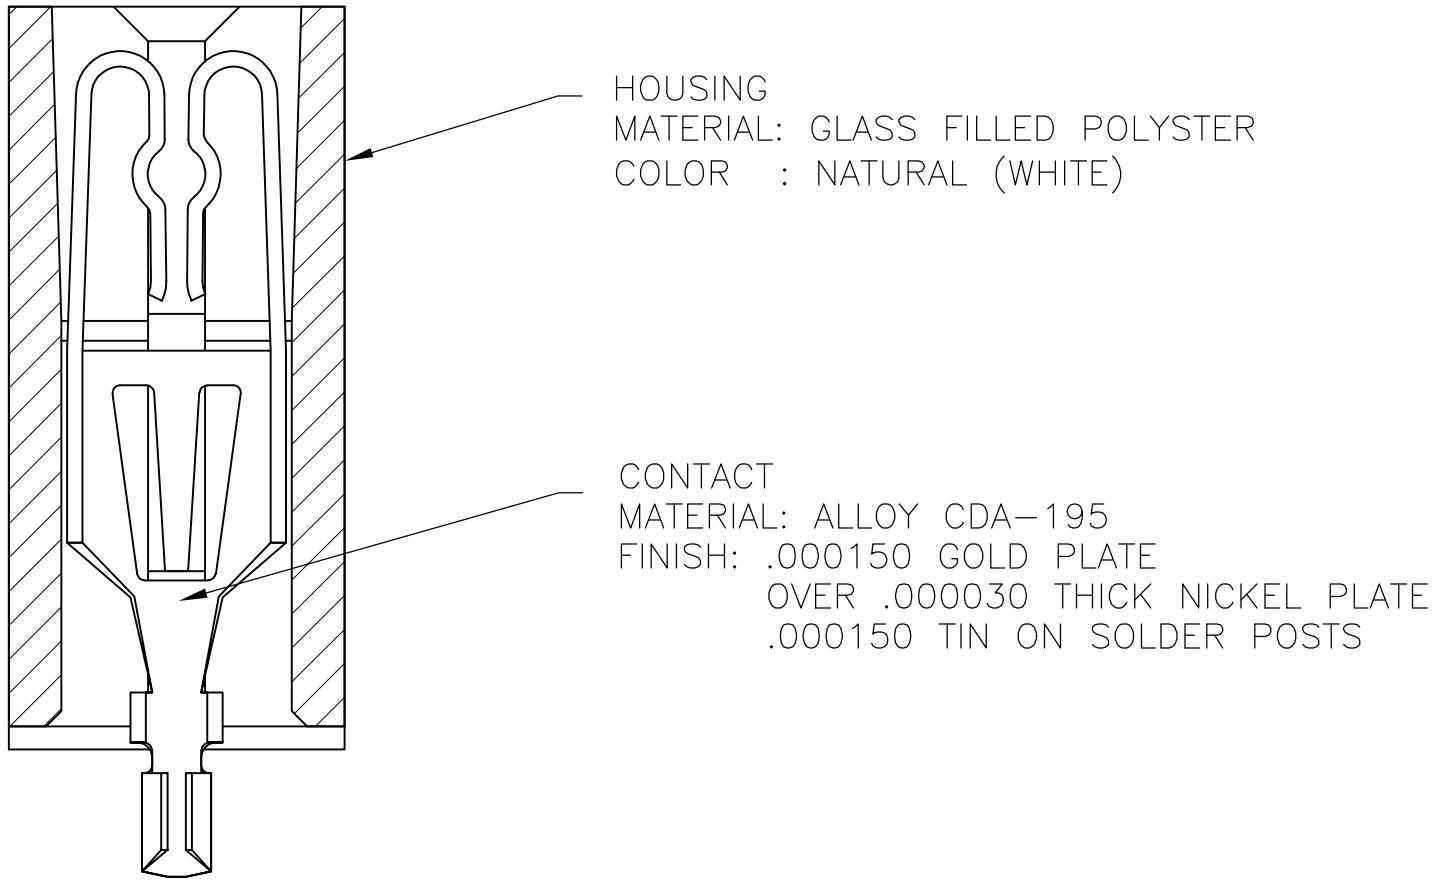

- 1 A 1/ 16" THICK DUMMY PC BOARD SHOULD BE INSERTED DURING SOLDERING.
- 2 MEASURE ACROSS MOUNTING EARS. MAY GOTO .020 OVER NOMINAL AT TOP OF THE HOUSING.
- 3 VOID CORING OPTION.
- 4 MATTE TIN PLATED POST.

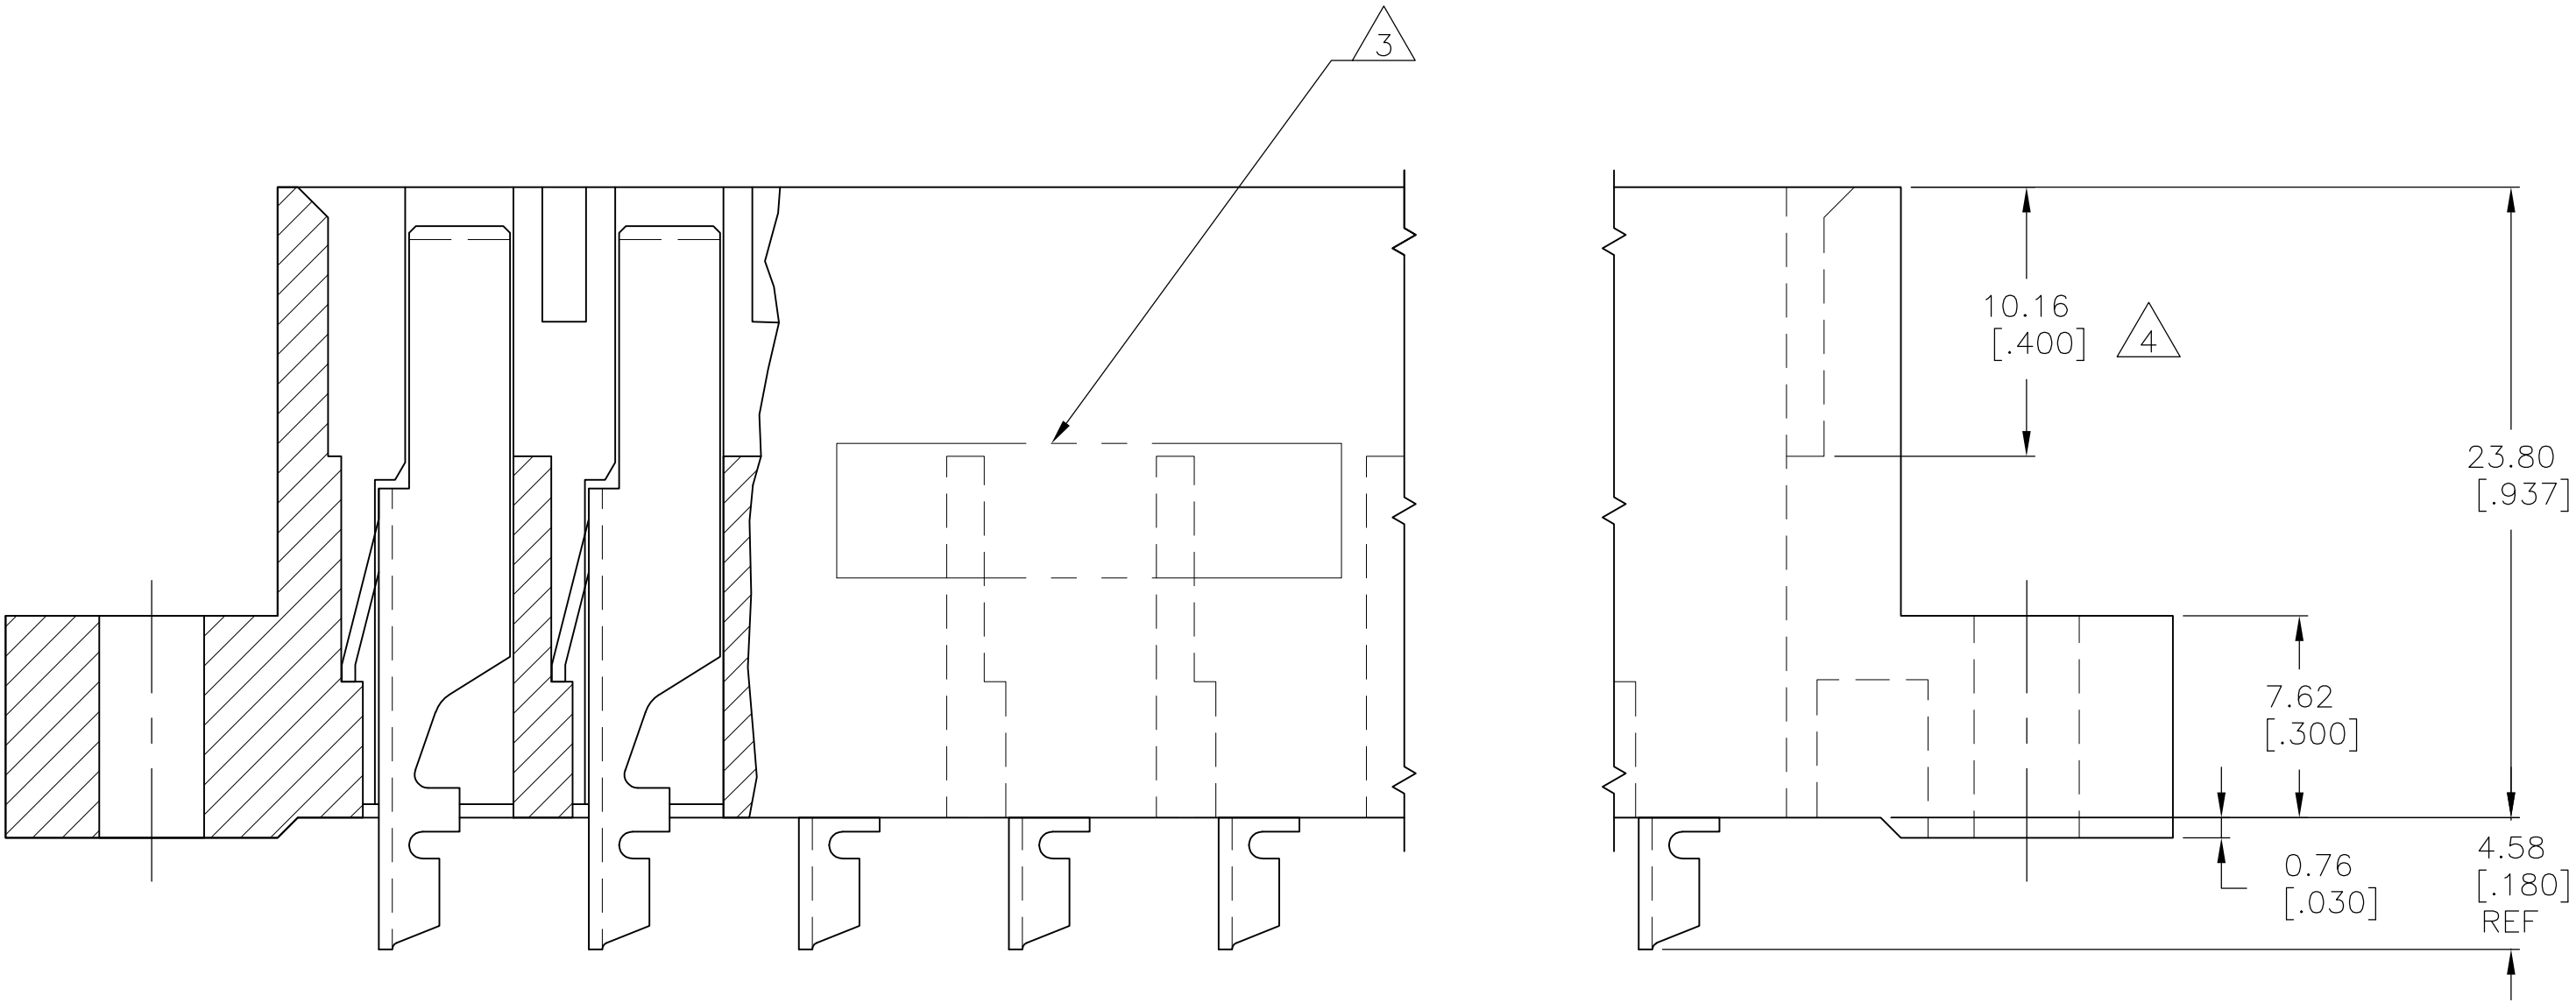

11	4.780	3.972	3.832	4.346	12	45-645200-3
11	4.780	3.972	3.832	4.346	12	645200-3
7	3.532	2.724	2.584	3.098	8	645200-2
5	2.908	2.100	1.960	2.474	6	645200-1
F	E	D	C	B	NO.OF POSN.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 23OCT94	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C MOSHER 23OCT94	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C MOSHER 23OCT94	PRODUCT SPEC			
0 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO		
1 PLC ± -		WEIGHT -		A100779C645200		
2 PLC ± -		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV J		
3 PLC ± .005						
4 PLC ± -						
ANGLES ± 2°						
MATERIAL SEE CALLOUTS						
FINISH SEE CALLOUTS						