
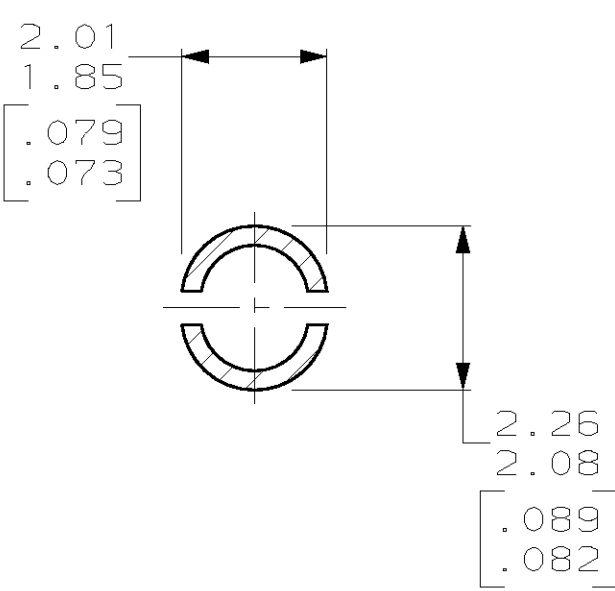
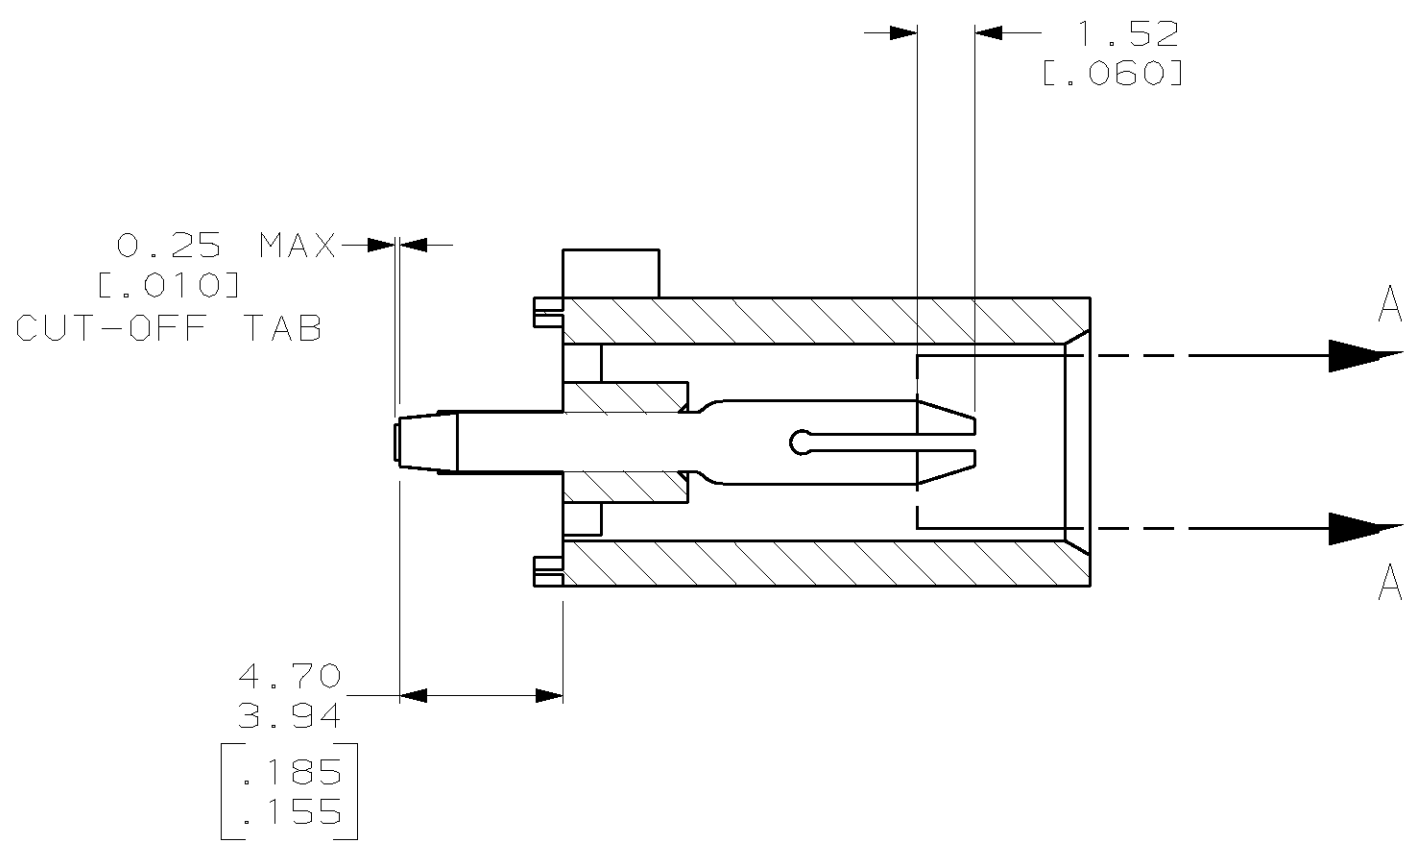
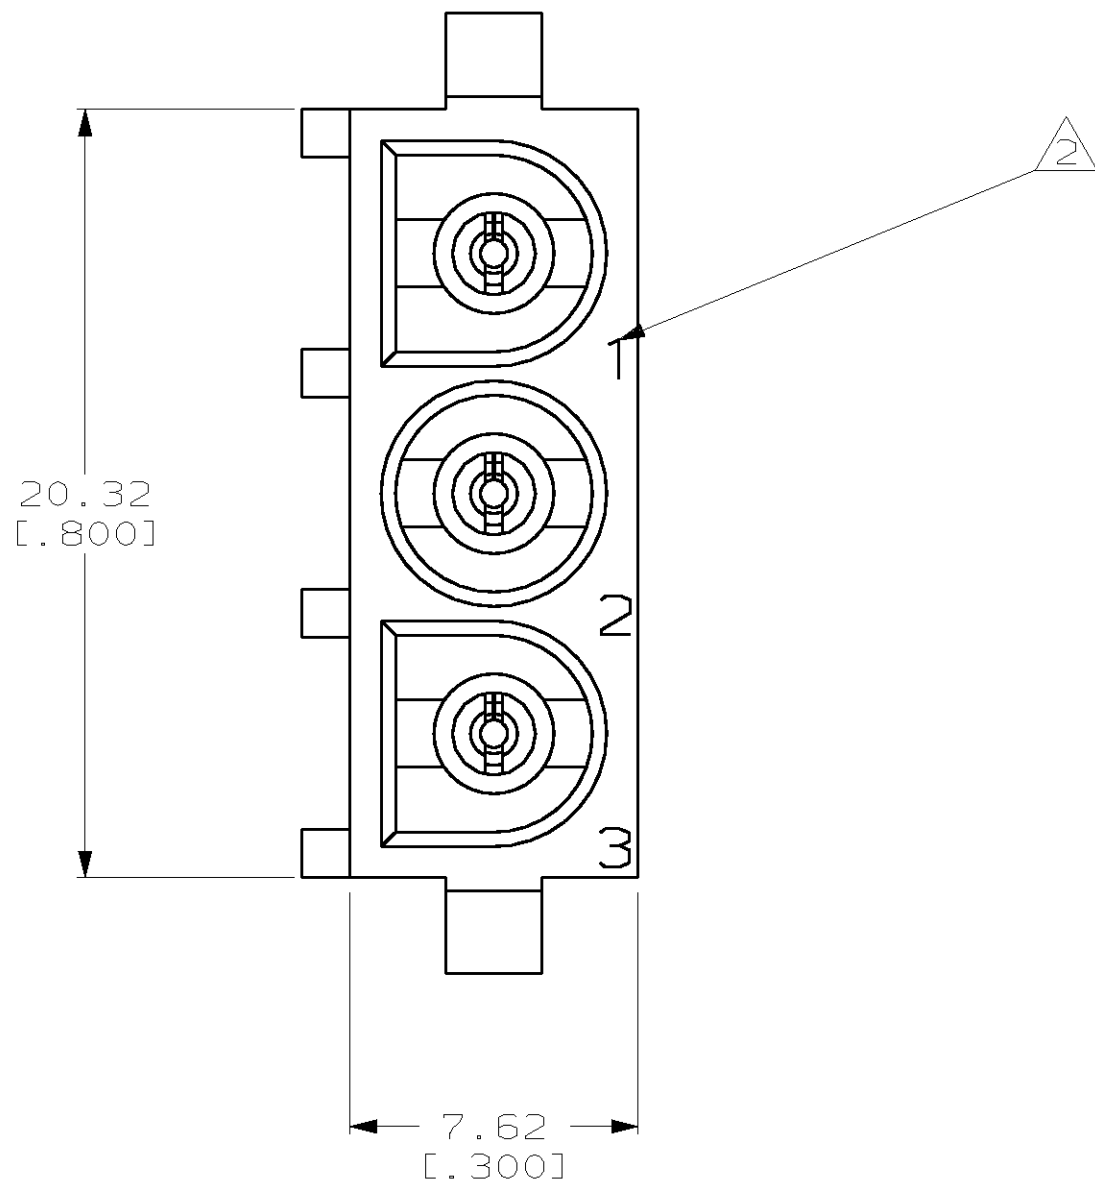
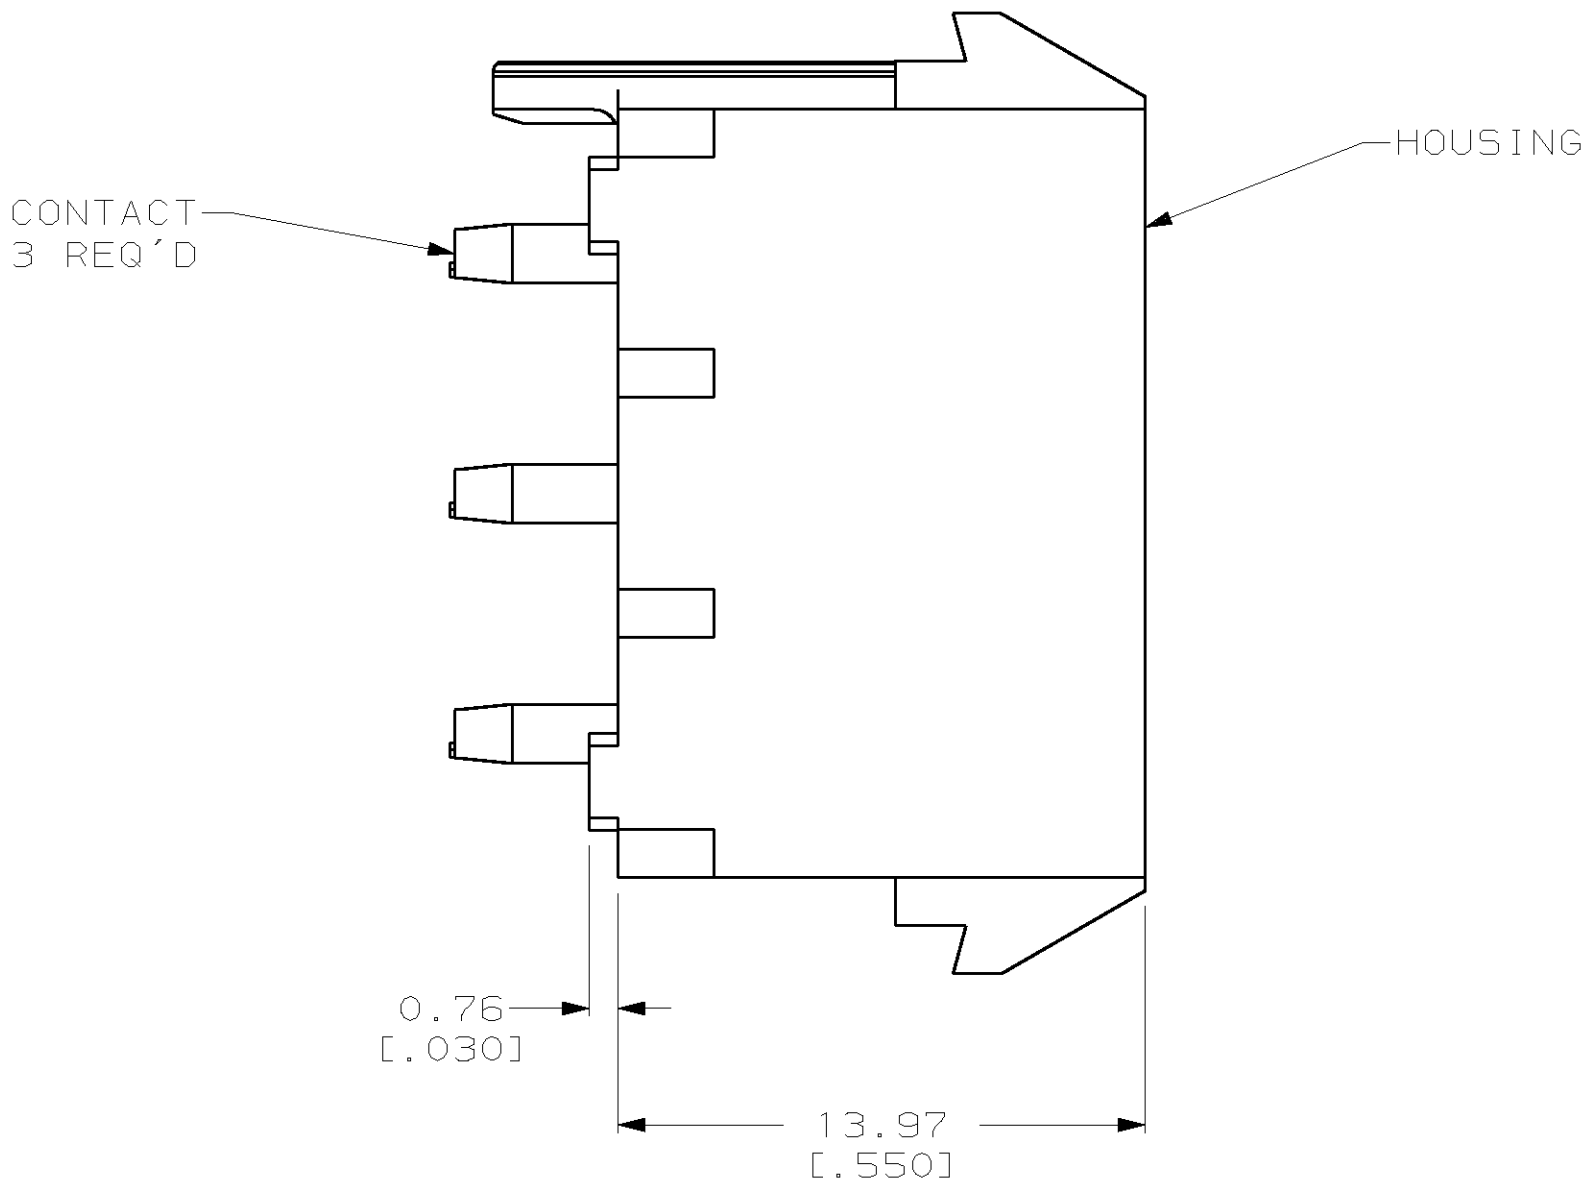



1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.


3. DIMENSIONS IN BRACKETS ARE IN INCHES.

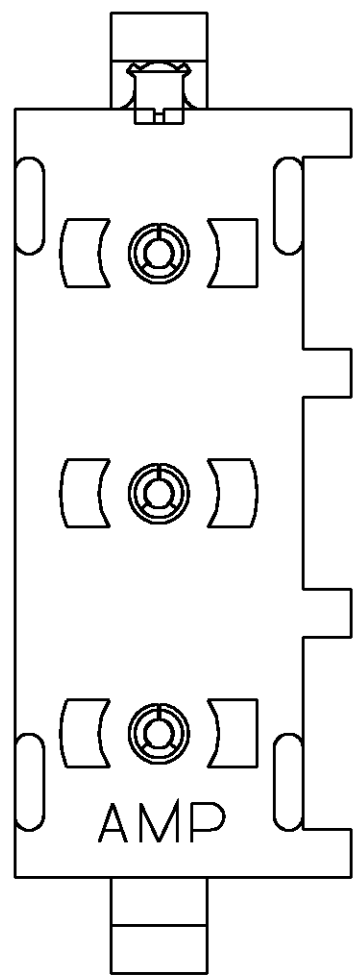


SECTION A-A
SCALE 10:1

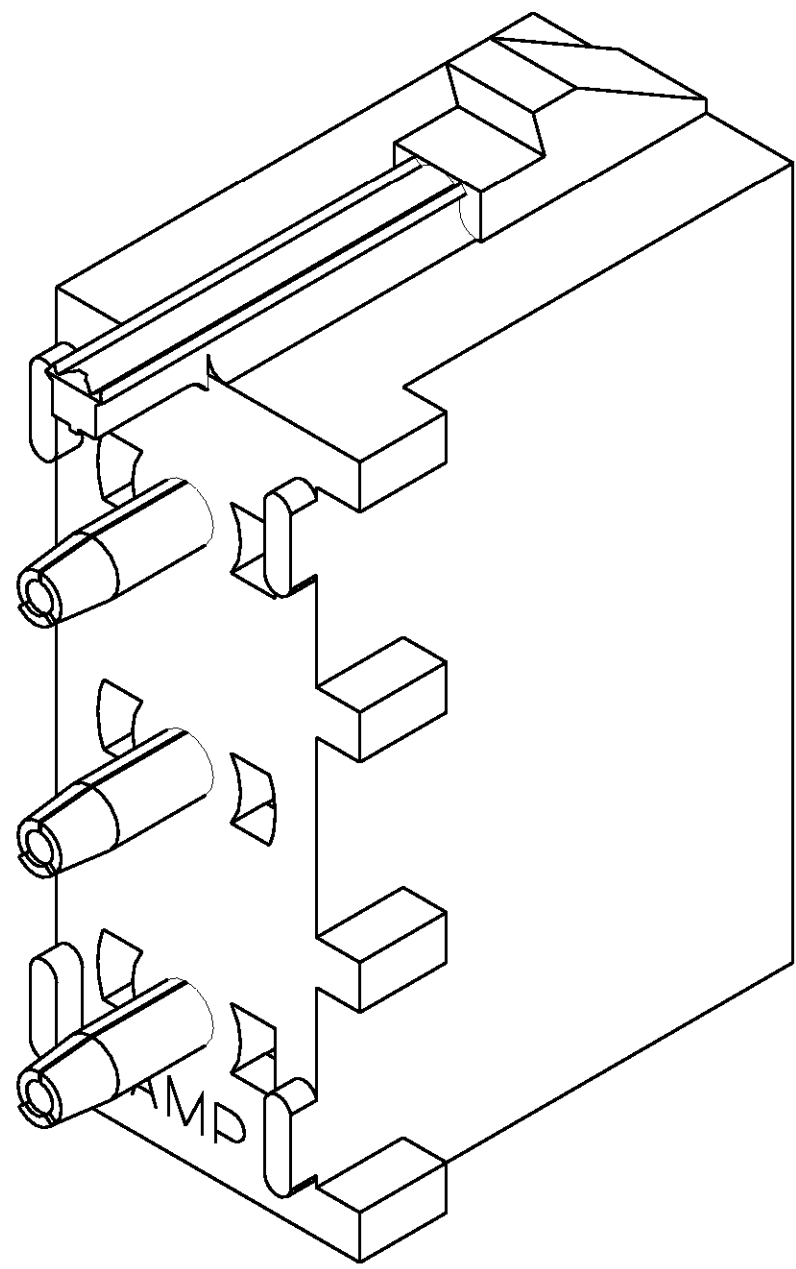

3-DIMENSIONAL MODEL
NTS

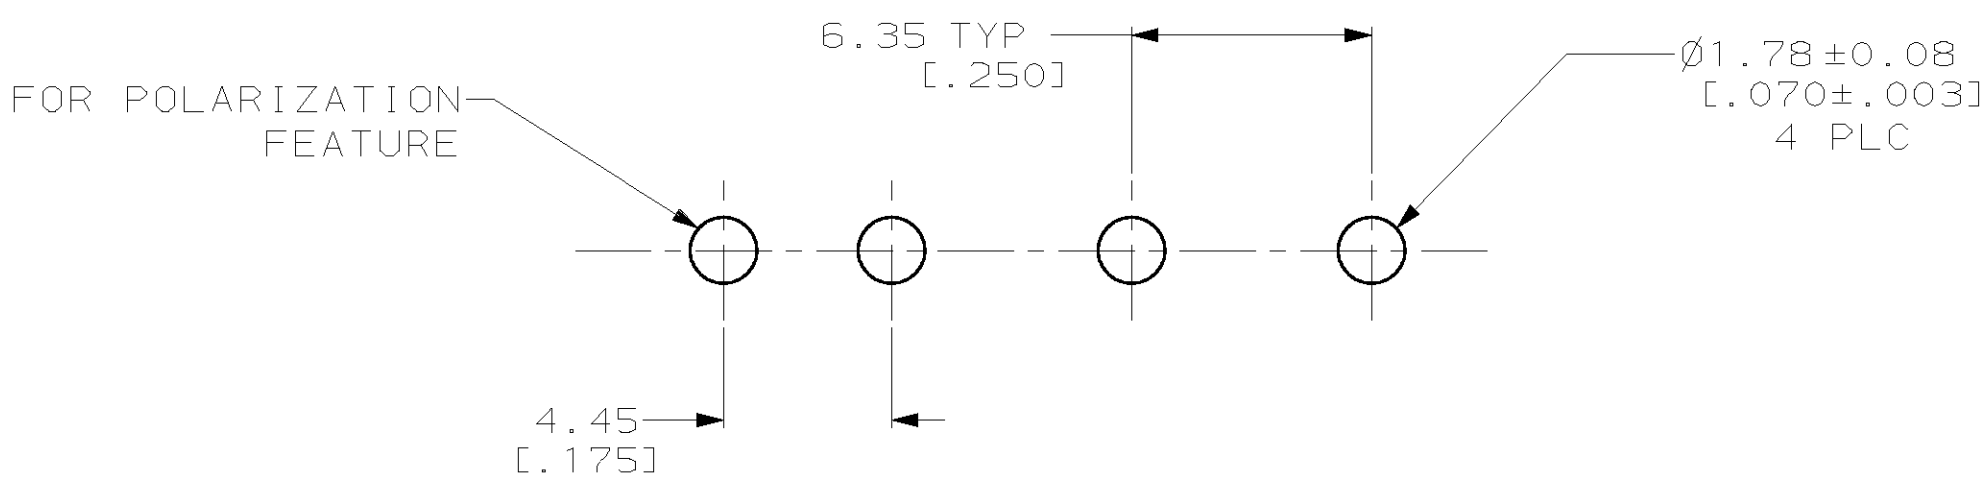

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPHOR BRONZE, PRE-TIN		NYLON, UL94V-2, NATURAL		641965-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL		PART NO	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. McEACHIN 07-JAN-2000		AMP AMP Incorporated Harrisburg, PA 17105-3608	
		CHK K. COBLE 07-JUN-2000			
DIMENSIONS: mm (INCHES)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PIN HEADER ASSEMBLY, POLARIZED, 3 CIRCUIT UNIVERSAL MATE-N-LOK™	
		0 PLC ±.005			
		1 PLC ±.005			
		2 PLC ±.013 (1.005)			
3 PLC ±.013 (1.005)		4 PLC ±.013 (1.005)		APPLICATION SPEC	
ANGLES 40°-90°		WEIGHT -		SIZE CAGE CODE DRAWING NO	
MATERIAL SEE TABLE		FINISH SEE TABLE		A1 00779 C-641965	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1	
		REV L			

