

THIN FILM CHIP INDUCTORS

ATFC-0201

RoHS
Compliant



0.60 x 0.30 x 0.23mm

FEATURES:

- Photolithographic single layer ceramic chip
- High SRF, excellent Q, superior temperature stability
- Tight tolerance $\pm 0.1\text{nH}$ available
- Self resonant frequency controlled within 10%
- Stable inductance in high frequency circuit
- Highly stable design for critical needs

APPLICATIONS:

- Cell phones and GPS
- VCO, TCXO Circuit and RF Transceiver Module
- Wireless LAN, Bluetooth Module, Communication Appliances

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	ATFC-0201
Operating temperature :	-25°C to +85°C
Storage temperature:	25 $\pm$ 3°C; Humidity <80%RH in Tape & Reel.

Part Number ATFC-0201- Inductance Code	L(nH)	Tolerance ($\pm\%$)	Q, Min @ 500MHz	SRF Min (GHz)	R _{DC} Max (Ω)	I _{DC} Max (mA)
ATFC-0201-0N1	0.1	B, C, S	8	9	0.20	400
ATFC-0201-0N2	0.2	B, C, S	8	9	0.20	400
ATFC-0201-0N3	0.3	B, C, S	8	9	0.20	400
ATFC-0201-0N4	0.4	B, C, S	8	9	0.25	350
ATFC-0201-0N5	0.5	B, C, S	8	9	0.25	350
ATFC-0201-0N6	0.6	B, C, S	8	9	0.25	350
ATFC-0201-0N7	0.7	B, C, S	8	9	0.30	300
ATFC-0201-0N8	0.8	B, C, S	8	9	0.30	300
ATFC-0201-0N9	0.9	B, C, S	8	9	0.30	300
ATFC-0201-1N0	1.0	B, C, S	8	9	0.30	300
ATFC-0201-1N1	1.1	B, C, S	8	9	0.35	300
ATFC-0201-1N2	1.2	B, C, S	8	9	0.35	300
ATFC-0201-1N3	1.3	B, C, S	8	9	0.45	250
ATFC-0201-1N4	1.4	B, C, S	8	9	0.45	250
ATFC-0201-1N5	1.5	B, C, S	8	9	0.45	250
ATFC-0201-1N6	1.6	B, C, S	8	9	0.55	200
ATFC-0201-1N7	1.7	B, C, S	8	9	0.55	200
ATFC-0201-1N8	1.8	B, C, S	8	9	0.55	200
ATFC-0201-1N9	1.9	B, C, S	8	9	0.55	200
ATFC-0201-2N0	2.0	B, C, S	8	8	0.70	200
ATFC-0201-2N1	2.1	B, C, S	8	8	0.70	200
ATFC-0201-2N2	2.2	B, C, S	8	8	0.70	200
ATFC-0201-2N3	2.3	B, C, S	8	8	0.80	150
ATFC-0201-2N4	2.4	B, C, S	8	8	0.80	150
ATFC-0201-2N5	2.5	B, C, S	8	8	0.80	150
ATFC-0201-2N6	2.6	B, C, S	8	8	0.80	150
ATFC-0201-2N7	2.7	B, C, S	8	8	0.80	150
ATFC-0201-2N8	2.8	B, C, S	8	6	1.00	150
ATFC-0201-2N9	2.9	B, C, S	8	6	1.00	150
ATFC-0201-3N0	3.0	B, C, S	8	6	1.00	150
ATFC-0201-3N1	3.1	B, C, S	8	6	1.00	150
ATFC-0201-3N2	3.2	B, C, S	8	6	1.00	150
ATFC-0201-3N3	3.3	B, C, S	8	6	1.00	150
ATFC-0201-3N4	3.4	B, C, S	8	6	1.20	150
ATFC-0201-3N5	3.5	B, C, S	8	6	1.20	150
ATFC-0201-3N6	3.6	B, C, S	8	6	1.20	150
ATFC-0201-3N7	3.7	B, C, S	8	6	1.20	150
ATFC-0201-3N8	3.8	B, C, S	8	6	1.20	150
ATFC-0201-3N9	3.9	B, C, S	8	6	1.20	150

ABRACON IS
ISO 9001 /2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.20.13
30332 Esperanza, Rancho Santa Margarita, California 92688
www.abracon.com

THIN FILM CHIP INDUCTORS

ATFC-0201

RoHS
Compliant



0.60 x 0.30 x 0.23mm

Key Electrical Specifications (Con'd)

Part Number AITFC-0201- Inductance Code	L(nH)	Tolerance (±%)	Q, Min @ 500MHz	SRF Min (GHz)	R _{DC} Max (Ω)	I _{DC} Max (mA)
ATFC-0201-4N0	4.0	B, C, S	8	6	1.20	150
ATFC-0201-4N4	4.4	B, C, S	8	6	1.30	140
ATFC-0201-4N7	4.7	B, C, S	8	6	1.40	130
ATFC-0201-4N9	4.9	B, C, S	8	6	1.60	130
ATFC-0201-5N6	5.6	G, J	8	4	1.80	130
ATFC-0201-6N1	6.1	G, J	8	4	2.00	120
ATFC-0201-6N8	6.8	G, J	8	4	2.30	110
ATFC-0201-7N4	7.4	G, J	8	4	2.80	110
ATFC-0201-8N2	8.2	G, J	8	3	3.00	110
ATFC-0201-9N1	9.1	G, J	8	3	3.25	100
ATFC-0201-9N2	9.2	G, J	8	3	3.25	100
ATFC-0201-10N	10	G, J	8	2	3.50	80

Test Conditions and Equipments

Inductance (L)

- Test equipment: Agilent4287A+Agilent16196C
- Test frequency: 500MHz

PART IDENTIFICATION:

ATFC- 0201- -

Inductance Code

Please refer to the
table above


Inductance Tolerance

J: ±5%
G: ±2%
S: ±0.3nH
C: ±0.2nH
B: ±0.1nH

Packaging


T: Tape and Reel
(10kpcs / reel)

OUTLINE DIMENSIONS:

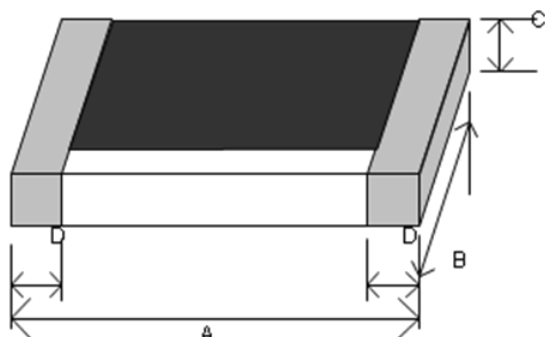

A	B	C	D
0.60±0.05	0.30±0.05	0.23±0.05	0.15±0.05

Recommended Land Pattern

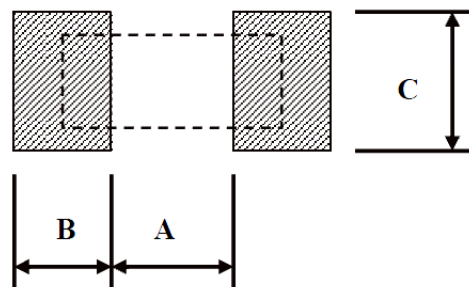

A	B	C
0.30	0.25	0.30±0.2

Dimension: mm

ABRACON IS
ISO 9001 /2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.20.13

THIN FILM CHIP INDUCTORS



ATFC-0201

RoHS
Compliant




0.60 x 0.30 x 0.23mm

MATERIALS:

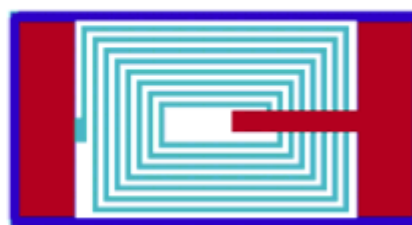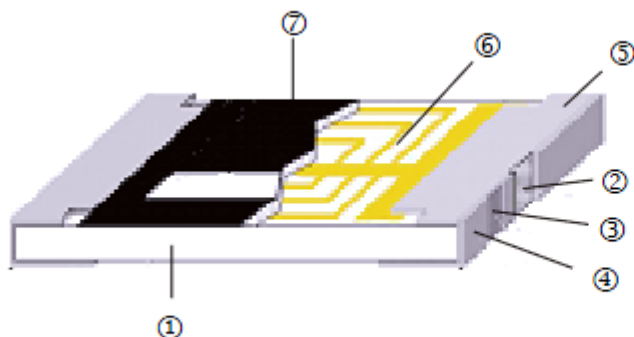

No.	Material
1	Alumina Substrate
2	Inner Electrode (Ni-Cr)
3	Barrier Layer (Ni)
4	External Electrode (Sn)
5	Edge Electrode
6	Cu Circuits
7	Overcoat

REFLOW PROFILE:

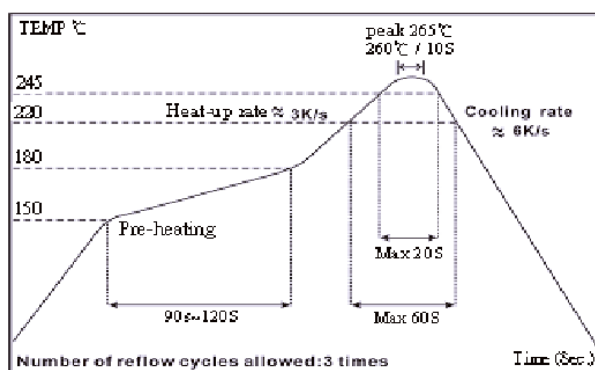

THIN FILM CHIP INDUCTORS

ATFC-0201


RoHS
Compliant




0.60 x 0.30 x 0.23mm

TAPE & REEL:

T= tape and reel (10,000pc/reel)

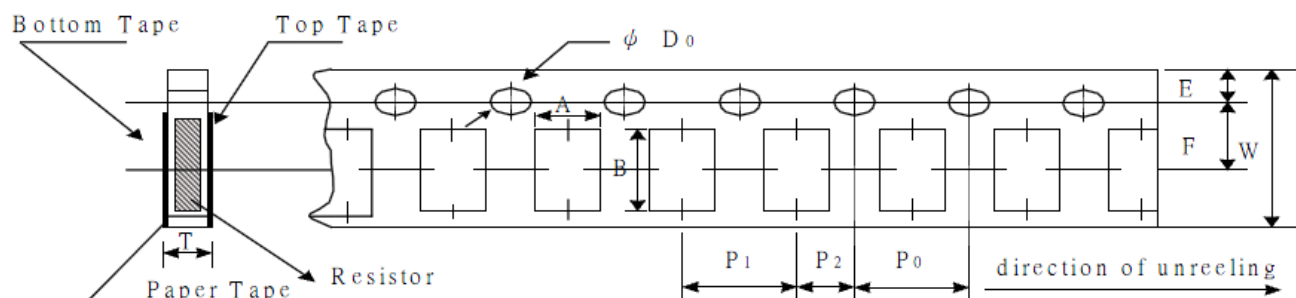

A	B	W	E	F	P0	P1	P2	ΦD0	T
0.40±0.05	0.70±0.05	8.00±0.10	1.75±0.05	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.55±0.03	0.42±0.02

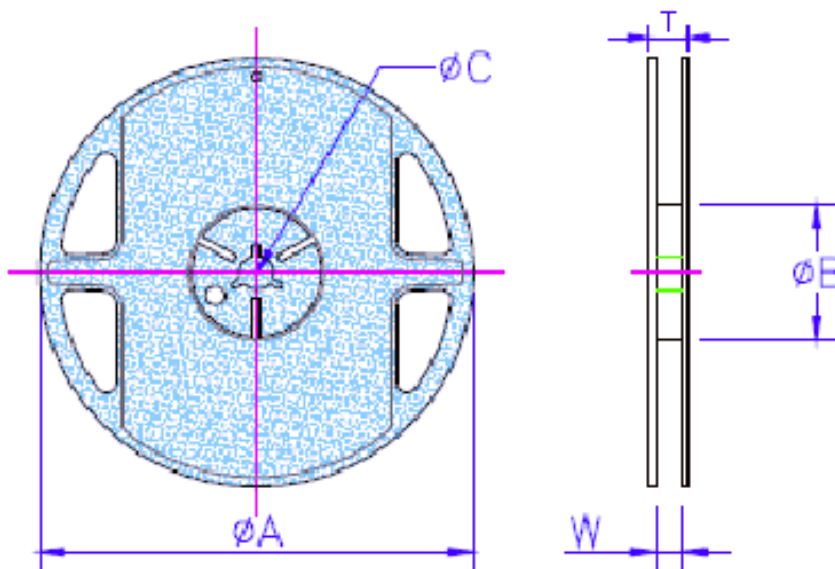

ΦA	ΦB	ΦC	W	T
178±1.0	60.0±1.0	13.5±0.70	9.5±1.0	11.5±1.0

Dimension: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001 /2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.20.13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ATFC-0201-1N0-BT](#) [ATFC-0201-1N1-BT](#) [ATFC-0201-1N2-BT](#) [ATFC-0201-1N3-BT](#) [ATFC-0201-1N4-BT](#) [ATFC-0201-1N5-BT](#) [ATFC-0201-1N6-BT](#) [ATFC-0201-1N7-BT](#) [ATFC-0201-1N8-BT](#) [ATFC-0201-1N9-BT](#) [ATFC-0201-2N0-BT](#) [ATFC-0201-2N1-BT](#) [ATFC-0201-2N2-BT](#) [ATFC-0201-2N3-BT](#) [ATFC-0201-2N4-BT](#) [ATFC-0201-2N5-BT](#) [ATFC-0201-2N6-BT](#) [ATFC-0201-2N7-BT](#) [ATFC-0201-2N8-BT](#) [ATFC-0201-2N9-BT](#) [ATFC-0201-3N0-BT](#) [ATFC-0201-3N1-BT](#) [ATFC-0201-3N2-BT](#) [ATFC-0201-3N3-BT](#) [ATFC-0201-3N4-BT](#) [ATFC-0201-3N5-BT](#) [ATFC-0201-3N6-BT](#) [ATFC-0201-3N7-BT](#) [ATFC-0201-3N9-BT](#) [ATFC-0201-4N7-BT](#) [ATFC-0201-5N6-GT](#) [ATFC-0201-6N8-GT](#) [ATFC-0201-8N2-GT](#) [ATFC-0201-10N-GT](#) [ATFC-0201-6N8-G-T](#) [ATFC-0201-1N9-B-T](#) [ATFC-0201-3N5-B-T](#) [ATFC-0201-2N6-B-T](#) [ATFC-0201-1N0-B-T](#) [ATFC-0201-3N3-B-T](#) [ATFC-0201-1N4-B-T](#) [ATFC-0201-3N2-B-T](#) [ATFC-0201-4N7-B-T](#) [ATFC-0201-2N1-B-T](#) [ATFC-0201-3N0-B-T](#) [ATFC-0201-1N5-B-T](#) [ATFC-0201-1N3-B-T](#) [ATFC-0201-2N0-B-T](#) [ATFC-0201-3N9-B-T](#) [ATFC-0201-3N4-B-T](#) [ATFC-0201-2N9-B-T](#) [ATFC-0201-10N-G-T](#) [ATFC-0201-1N8-B-T](#) [ATFC-0201-5N6-G-T](#) [ATFC-0201-1N2-B-T](#) [ATFC-0201-8N2-G-T](#) [ATFC-0201-2N3-B-T](#) [ATFC-0201-3N6-B-T](#) [ATFC-0201-3N7-B-T](#) [ATFC-0201-2N4-B-T](#) [ATFC-0201-2N2-B-T](#) [ATFC-0201-1N7-B-T](#) [ATFC-0201-1N1-B-T](#) [ATFC-0201-2N5-B-T](#) [ATFC-0201-2N8-B-T](#) [ATFC-0201-1N6-B-T](#) [ATFC-0201-2N7-B-T](#) [ATFC-0201-3N1-B-T](#)