

L-53ID-14V HIGH EFFICIENCY RED
L-53GD-14V GREEN
L-53YD-14V YELLOW
L-53SGD-14V SUPER BRIGHT GREEN
L-53SRD-14V SUPER BRIGHT RED

Features

- 14 VOLT SERIES IN T-1 PACKAGES.
- INTEGRAL CURRENT LIMITING RESISTOR.
- NO EXTERNAL CURRENT LIMITER REQUIRED WITH 14 VOLT SUPPLY.
- COST EFFECTIVE - SAVE SPACE AND RESISTOR COST.
- WIDE VIEWING ANGLE.
- AVAILABLE IN ALL COLORS.
- 14V INTERNAL RESISTOR.

Description


The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Green and Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

Package Dimensions

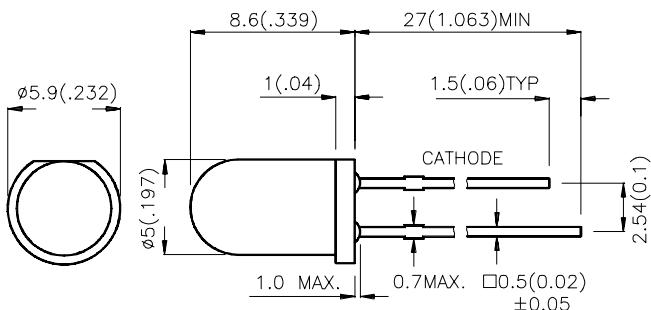

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) VF=14V		Viewing Angle
			Min.	Typ.	
L-53ID-14V	HIGH EFFICIENCY RED(GaAsP/GaP)	RED DIFFUSED	18	65	60°
L-53GD-14V	GREEN (GaP)	GREEN DIFFUSED	5	18	60°
L-53YD-14V	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	5	16	60°
L-53SGD-14V	SUPER BRIGHT GREEN(GaP)	GREEN DIFFUSED	5	18	60°
L-53SRD-14V	SUPER BRIGHT RED(GaAlAs)	RED DIFFUSED	70	160	60°

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value..

Electrical / Optical Characteristics at TA=25°C


Symbol	Parameter	Device	Typ.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red Green Yellow Super Bright Red Super Bright Green	627 565 590 660 565	nm	VF=14V
λD	Wavelength current	High Efficiency Red Green Yellow Super Bright Red Super Bright Green	625 568 588 640 568	nm	VF=14V
Δλ1/2	Spectral Line Halfwidth	High Efficiency Red Green Yellow Super Bright Red Super Bright Green	45 30 35 20 30	nm	VF=14V
I _F	Forward Current	High Efficiency Red Green Yellow Super Bright Red Super Bright Green	10 10 10 10 10	mA	VF=14V
I _R	Reverse Current	All	10	μA	VR = 5V

Absolute Maximum Ratings at $T_A=25^\circ\text{C}$





Parameter	High Efficiency Red	Green	Yellow	Super Bright Red	Super Bright Green	Units
Power dissipation	130	160	160	160	160	mW
Forward voltage (max)	16	16	16	16	16	V
Reverse Voltage	5	5	5	5	5	V
Operating Temperature				-40 °C To +70 °C		
Storage Temperature				-40 °C To +85 °C		
Lead Solder Temperature [1]				260 °C For 5 Seconds		

Note:





1. 4mm below package base.

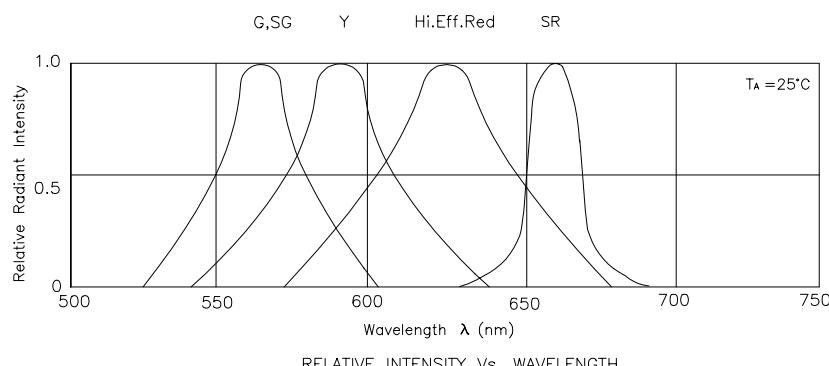





High Efficiency Red L-53ID-14V







Green L-53GD-14V



Yellow L-53YD-14V



Super Bright Red L-53SRD-14V



Super Bright Green L-53SGD-14V

