

3. Voltage Regulators

XC6202 Series

(High Voltage) Positive Voltage Regulators


General Description

The XC6202 series are highly precise, low power consumption, high voltage, positive voltage regulators manufactured using CMOS and laser trimming technologies. The XC6202 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. Since the current limiter circuit is built-in, the IC is protected against overshoot currents at such times of output shorts etc. SOT-23 (150mW) and SOT-89 (500mW) packages are available.

Features

- Maximum Output Current: 100mA
- Dropout Voltage: 200mV @ 30mA
- Operating Voltage Range: up to 20V
- Output Voltage Range: 1.8V to 18V (selectable in 0.1V steps)
- Highly Accurate: $\pm 2\%$
- Low Power Consumption: TYP 7.0 μ A (5.0V)
- Output VoltageTemp. Characteristics: TYP ± 100 ppm/ $^{\circ}$ C
- Line Regulation: TYP 0.2% /V
- Ultra Small Packages: SOT-23 (150mW), SOT-89 (500mW)


Pin Configuration

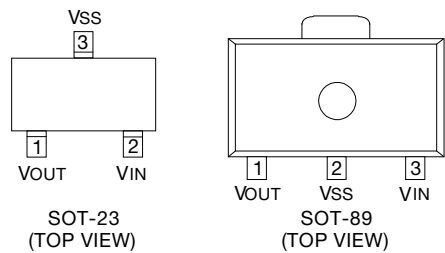

Pin Assignment

PIN NUMBER		PIN NAME	FUNCTION
SOT-23	SOT-89		
1	1	VOUT	Output
3	2	VSS	Ground
2	3	VIN	Power Input

Block Diagram

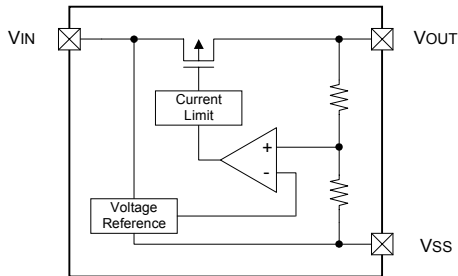

Ordering Information

XC6202P①②③④⑤		
DESIGNATOR	SYMBOL	DESCRIPTION
① ②	18 ~ J0	Output Voltage For the voltage above 10V, see the example 10=A, 11=B, 12=C, 13=D, 14=E, 15=F, 16=G, 17=H, 18=J e.g. VOUT = 3.0V → ① : 3, ② : 0 VOUT = 12V → ① : C, ② : 0 VOUT = 15V → ① : F, ② : 0
③	2	Accuracy : $\pm 2\%$
④	M	Package : SOT-23 (1reel = 3000pcs)
	P	SOT-89 (1reel = 1000pcs)
⑤	R	Embossed Tape : Standard Feed
	L	Embossed Tape : Reverse Feed