

LOW VOLTAGE VIDEO AMPLIFIER WITH LPF


■ GENERAL DESCRIPTION

The **NJM2574** is a Low Voltage Video Amplifier contained LPF circuit, 75Ω driver and internal CLAMP/BIAS SW, LPF/through SW to connect TV monitor directly.

The input signal is composite signal (0.5Vpp). The mute circuit with power save function is suitable for low power design.

The **NJM2574** is suitable for down sizing of Digital Steel Camera, and DVC for small package.

■ PACKAGE OUTLINE




NJM2574RB1
(MSOP8 (TVSP8))

■ FEATURES

- Operating Voltage 2.8 to 5.5V
 - Input Composite Signal 0.5Vpp
 - 12dB Amplifier
 - 75Ω Driver
 - Internal CLAMP/BIAS SW
 - Internal LPF/through SW
 - Operating Current 9.0mA typ. at Vcc=3.0V
 - Operating Current in Battery Saving 70μA typ. at Vcc=3.0V
 - Bipolar Technology
 - Package Outline MSOP8 (TVSP8)*
- *MEET JEDEC MO-187-DA / THIN TYPE

■ BLOCK DIAGRAM

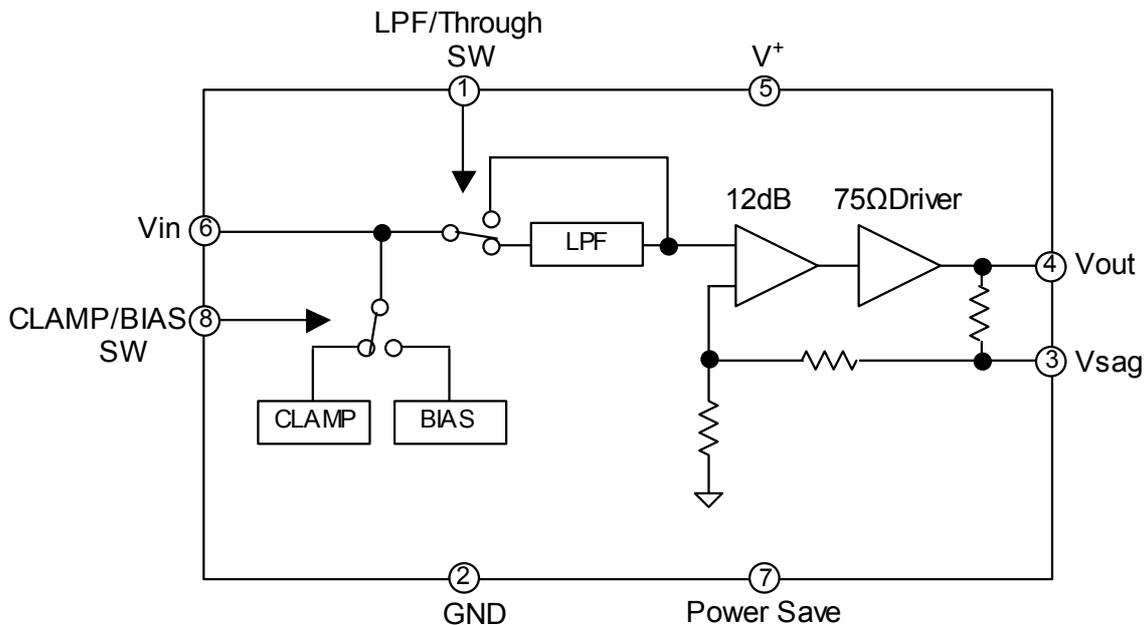

NJM2574

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	7.0	V
Power Dissipation	P _D	320	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +125	°C


■ ELECTRICAL CHARACTERISTICS (V⁺=3.0V,RL=150Ω,Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	Vopr		2.8	3.0	5.5	V
Operating Current	I _{CC}	No Signal	-	9.0	10.0	mA
Operating Current at Power Save	I _{save}	Power Save Mode	-	70	90	μA
Maximum Output Voltage Swing	Vomv	f=1kHz,THD=1%,CLAMP MODE LPF MODE	2.2	2.7	-	Vp-p
	Vom RGB	f=1kHz,THD=1%, BIAS MODE, through MODE	1.4	2.0	-	
Voltage Gain	Gv	Vin=100kHz,0.5Vp-p, Input Sine Signal	12.0	12.4	12.8	dB
Frequency Characteristic (Through MODE)	Gf	Vin=20MHz/100kHz,0.5Vp-p	-6.0	-3.0	-	dB
Low Pass Filter Characteristic	Gfy4.5M	Vin=4.5MHz/100kHz,0.5Vp-p	-0.95	-0.45	0.05	dB
	Gfy8M	Vin=8MHz/100kHz,0.5Vp-p	-	-3.0	-	
	Gfy23.5M	Vin=23.5MHz/100kHz,0.5Vp-p	-	-23	-17	
Differential Gain	DG	Vin=0.5Vp-p, Input 10step Video Signal	-	0.5	-	%
Differential Phase	DP	Vin=0.5Vp-p, Input 10step Video Signal	-	0.5	-	deg
S/N	SNv	Vin=0.5Vp-p, 100% White Video Signal, R _L =75Ω Band Width 100kHz to 6MHz	-	60	-	dB
2nd. Distortion	Hv	Vin=0.5Vp-p, 3.58MHz, Sine Video Signal, R _L =75Ω,	-	-60	-	dB
SW Change Voltage High Level	VthH		1.8	-	V ⁺	V
SW Change Voltage Low Level	VthL		0	-	0.3	

■ CONTROL TERMINAL

PARAMETER	STATUS	NOTE
Power Save(7pin)	H	Power Save : OFF
	L	Power Save : ON (Mute)
	OPEN	Power Save : ON (Mute)
LPF/Through SW(1pin)	H	LPF MODE
	L	Through MODE
	OPEN	Through MODE
CLAMP/BIAS SW(8pin)	H	CLAMP MODE
	L	BIAS MODE
	OPEN	BIAS MODE


■ TEST CIRCUIT

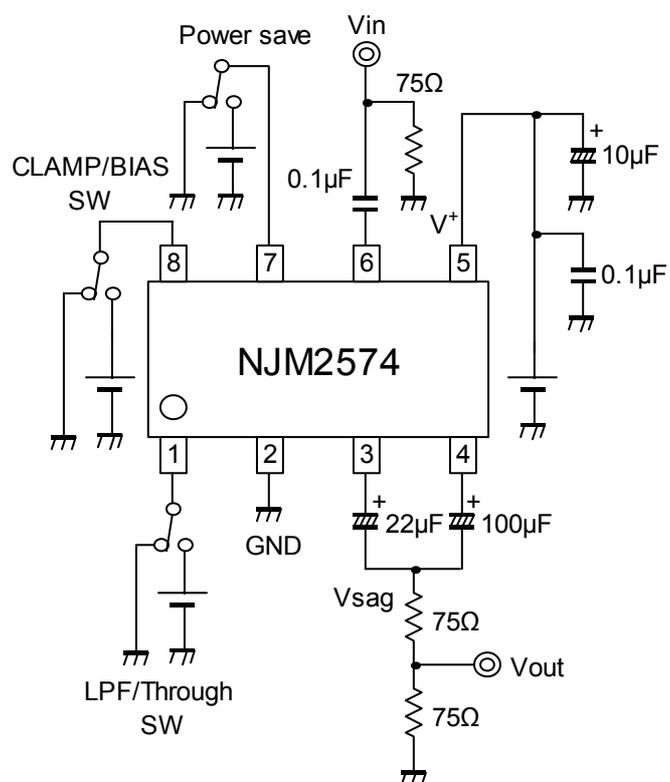


NJM2574

APPLICATION CIRCUIT


(1) Standard circuit

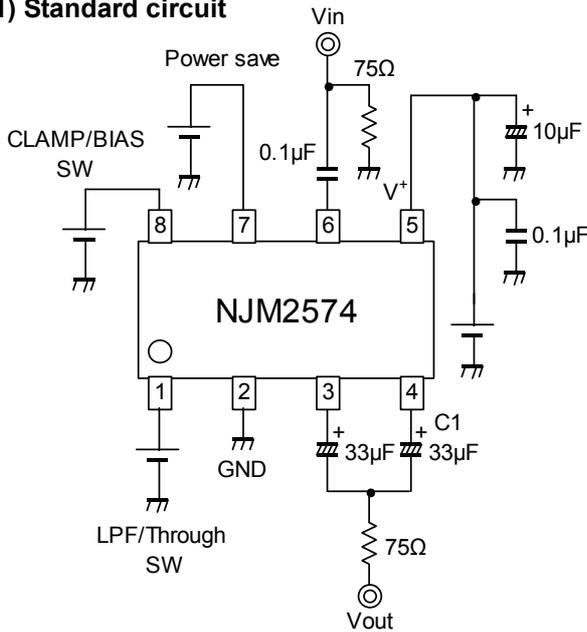

(2) SAG correction unused circuit

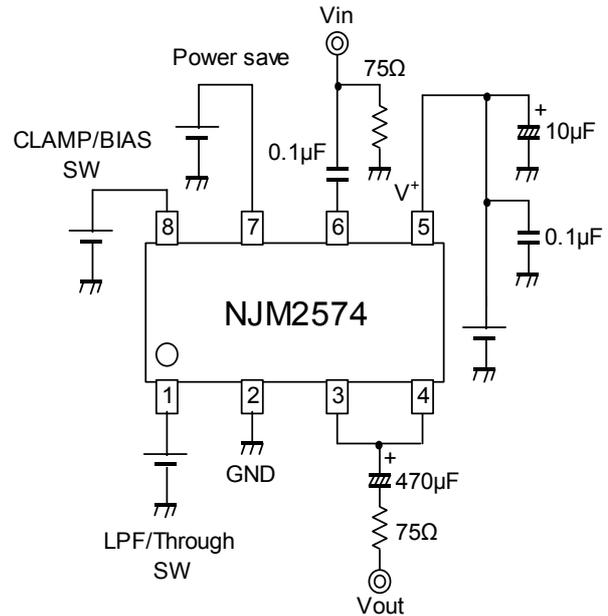

(3) Two-line driving circuit

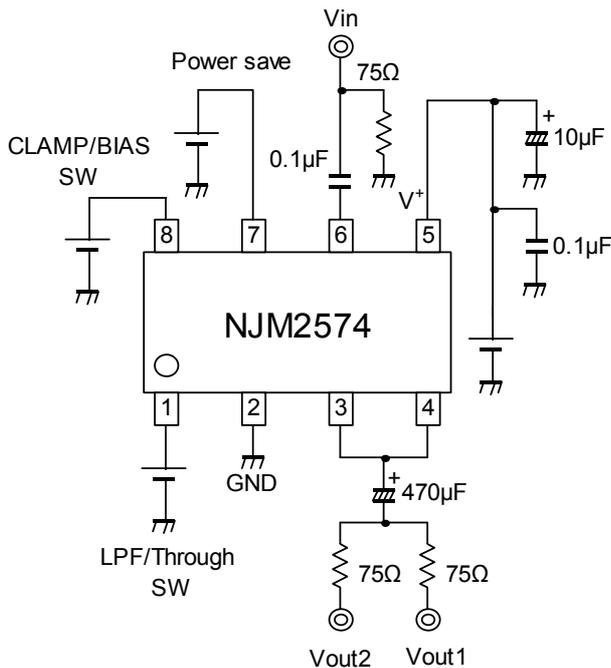

(1) Standard circuit

This circuit is for a portable equipment of small mounting space.

The SAG correction reduces output coupling capacitor values.

However, this circuit may cause to SAG deterioration, and lose synchronization by luminance fluctuation.

Adjust the C1 value, checking the waveform containing a lot of low frequency components like a bounce waveform (Worst condition waveform of SAG). Change the capacitor of C1 into a large value to improve SAG.

(2) SAG correction unused circuit

We recommend this circuit when there is no space limitation.

Connect the coupling capacitor after connecting the Vout pin and Vsag pin. The recommended value is 470μF or more.

(3) Two-line driving circuit

This circuit drives two-line of 150Ω. However, it may cause to lose synchronization by an input signal of large APL change (100% white signals more than 1Vp-p). Confirm the large APL change waveform (100% white signals more than 1Vp-p) and evaluate sufficiently.

■ APPLICATION (IC characteristic is not guaranteed)


When you use a power save terminal more than by 4.0V, please put resistance of about 20kΩ into a power save terminal.

Resistance is unnecessary in the following condition.


1. The power save terminal voltage (VthH) is less than 4.0V.
2. When you select "BIAS" at the power-supply voltage of 5V.

Example)

- PS(VthH) ≥ 4.0V



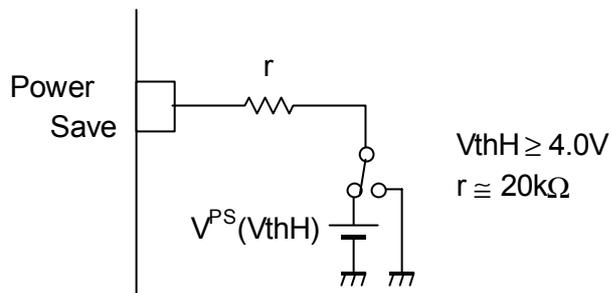


- PS(VthH) < 4.0V

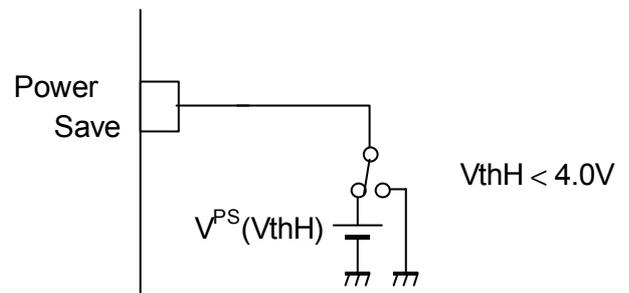

NJM2574

■ TERMINAL DESCRIPTION

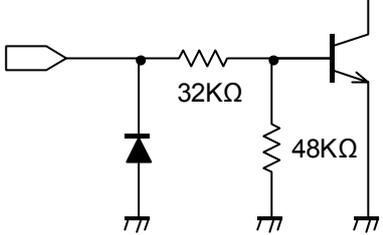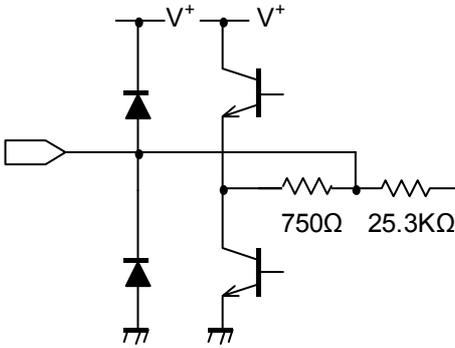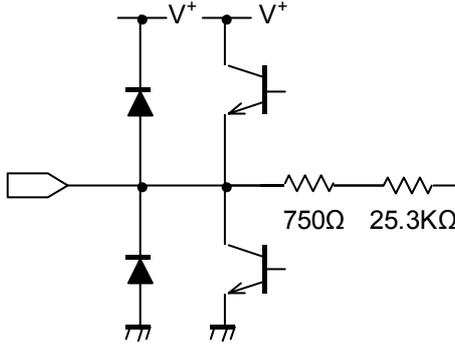
No	SYMBOL	EQUIVALENT CIRCUIT
1	LPF/Through SW	
2	GND	
3	Vsag	
4	Vout	
5	V+	

■ TERMINAL DESCRIPTION


No	SYMBOL	EQUIVALENT CIRCUIT
6	Vin	
7	PowerSave	
8	CLAMP/BIAS SW	

■ TYPICAL CHARACTERISTICS


Voltage Gain vs. Frequency

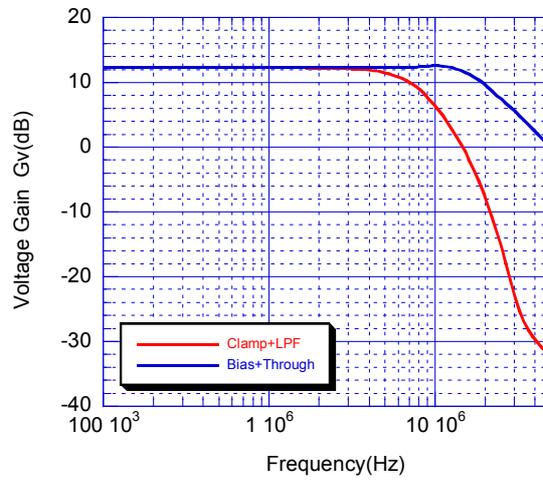


Voltage Gain vs. Frequency
(Clamp+LPF Input)

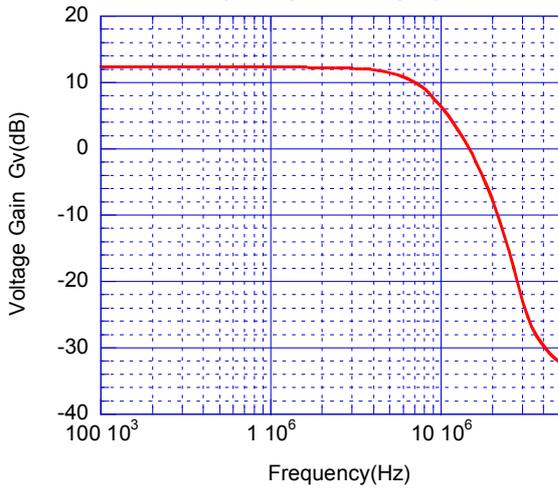


Voltage Gain vs. Frequency
(Bias+Through Input)

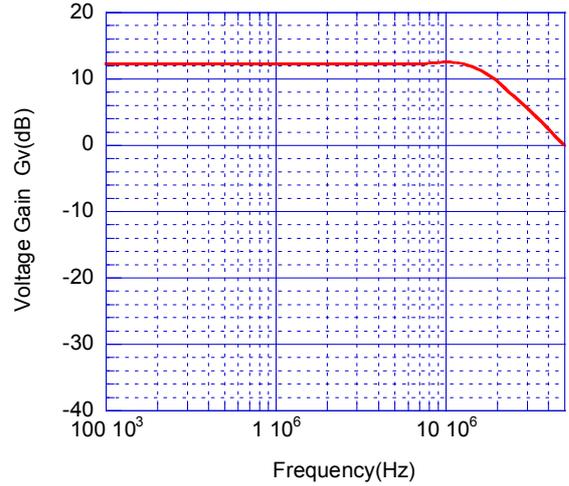

Operating Current I_{CC} vs. Supply Voltage

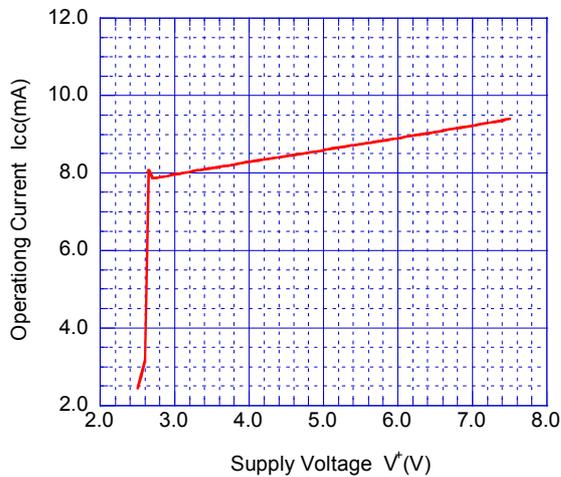


Operating Current at Standby State
vs. Supply Voltage

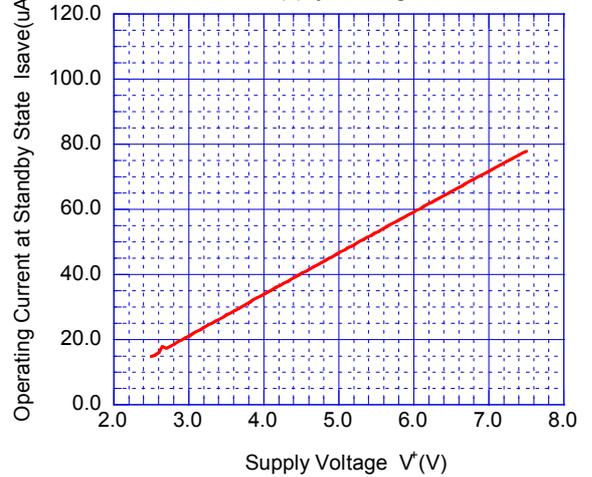


■ TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Supply Voltage
(Clamp+LPF Type Input)

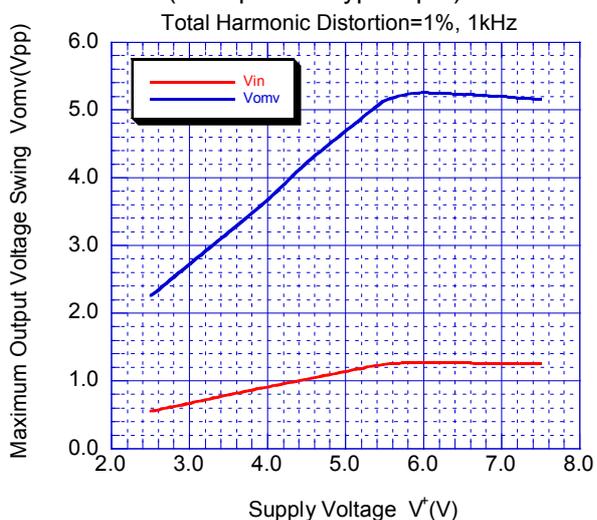


Maximum Output Voltage Swing vs. Supply Voltage
(Bias+Through Type Input)

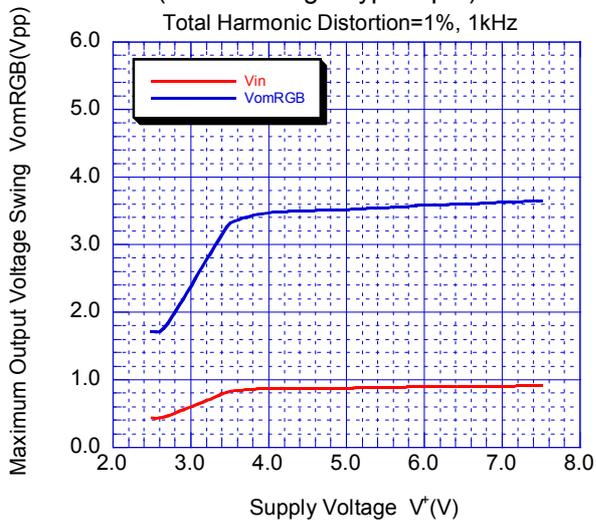


Voltage Gain vs. Supply Voltage
0.5Vpp, 100kHz sinewave signal input

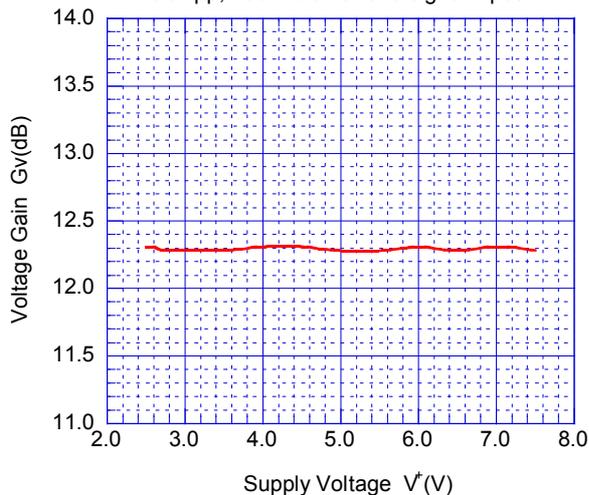


Gain Frequency Characteristics vs. Supply Voltage
(Bias+Through Type Input)

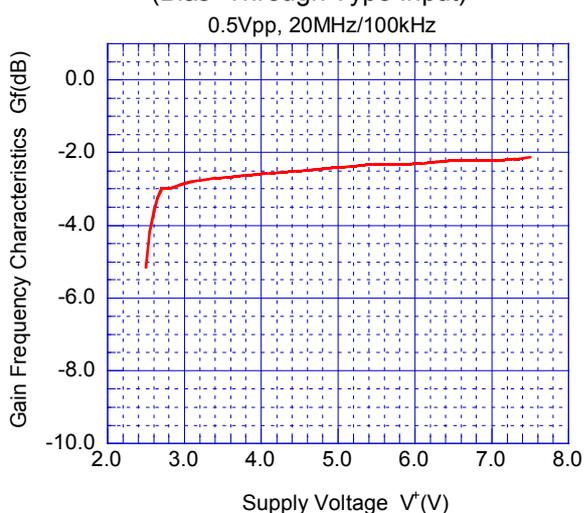

Low Pass Filter Characteristic 1 vs. Supply Voltage
(Clamp+LPF Type Input)

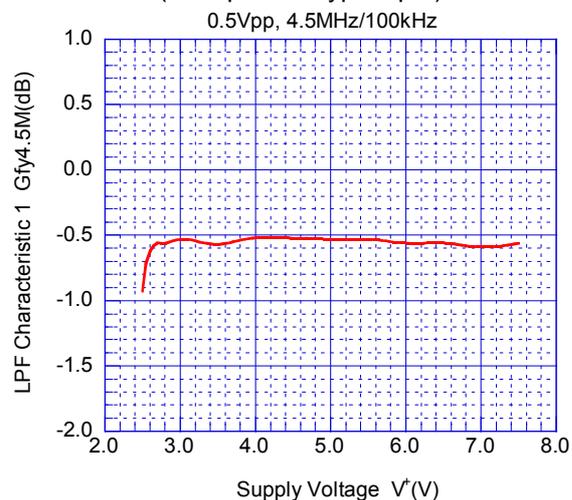


Low Pass Filter Characteristic 2 vs. Supply Voltage
(Clamp+LPF Type Input)

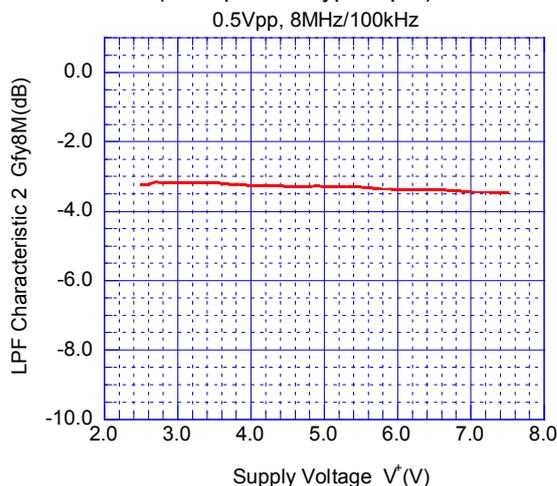


NJM2574

■ TYPICAL CHARACTERISTICS


Low Pass Filter Characteristic 3 vs. Supply Voltage
(Clamp+LPF Type Input)
0.5Vpp, 23.5MHz/100kHz

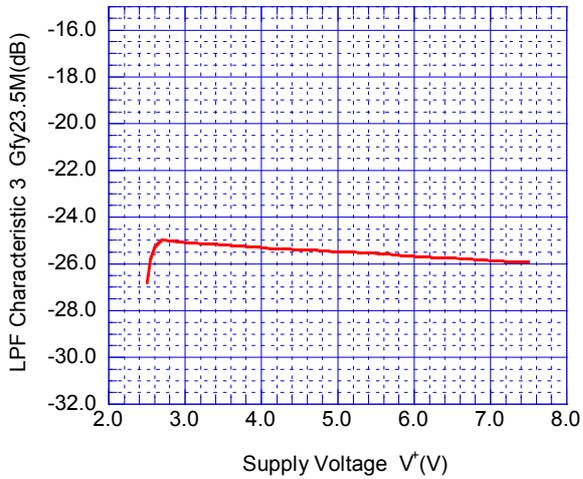


Differential Gain vs. Supply Voltage
0.5Vpp, 10step video signal input

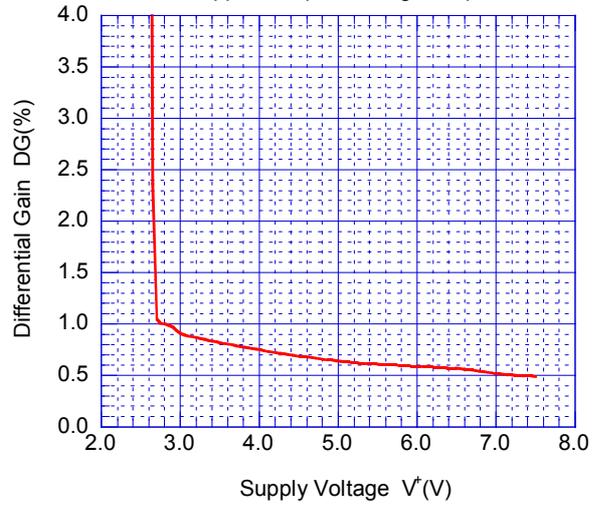


Differential Phase vs. Supply Voltage
0.5Vpp, 10step video signal input

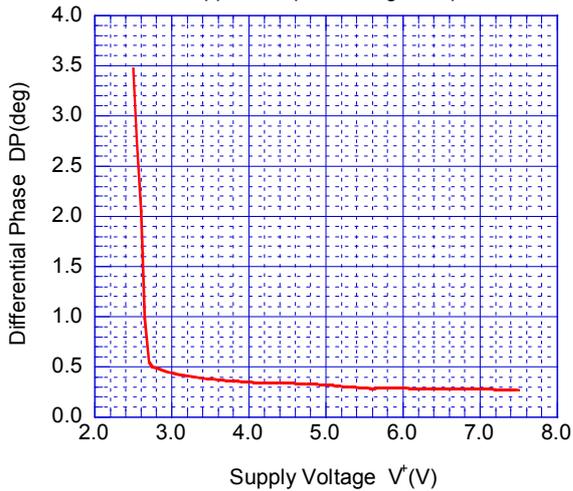


Signal to Noise Ratio vs. Supply Voltage

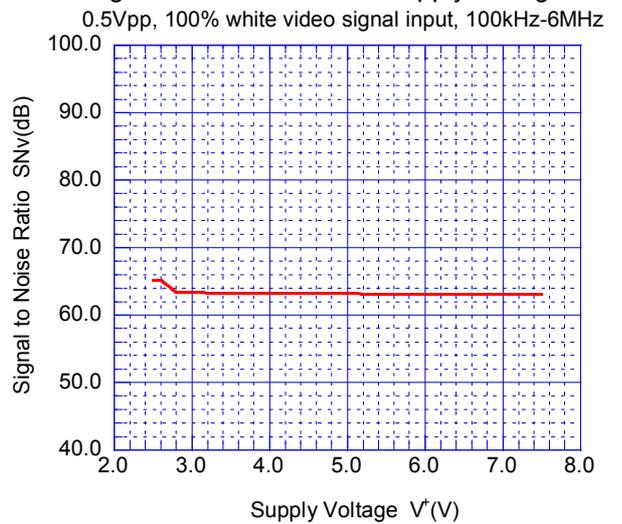

Second Harmonic Distortion vs. Supply Voltage
0.5Vpp, 3.58MHz sinewave signal input

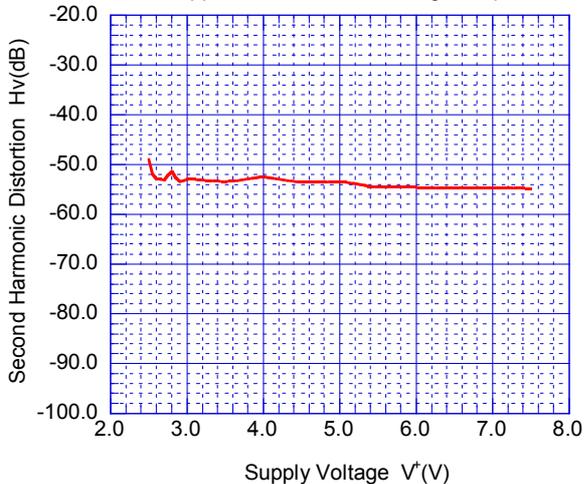


Switching Voltage vs. Supply Voltage

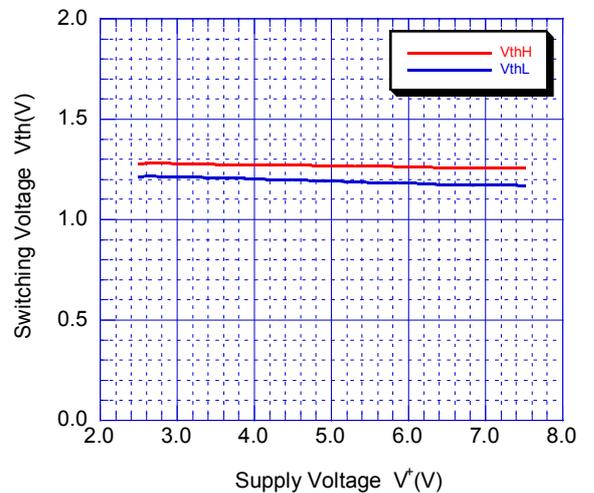


■ TYPICAL CHARACTERISTICS


PowerSave Switching Voltage vs. Supply Voltage

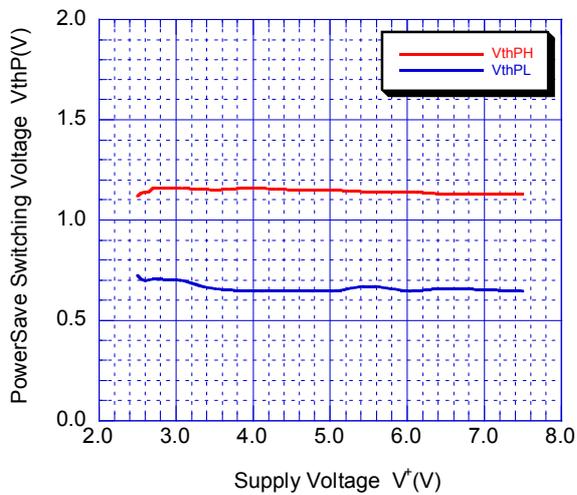


Operating Current vs. Temperature

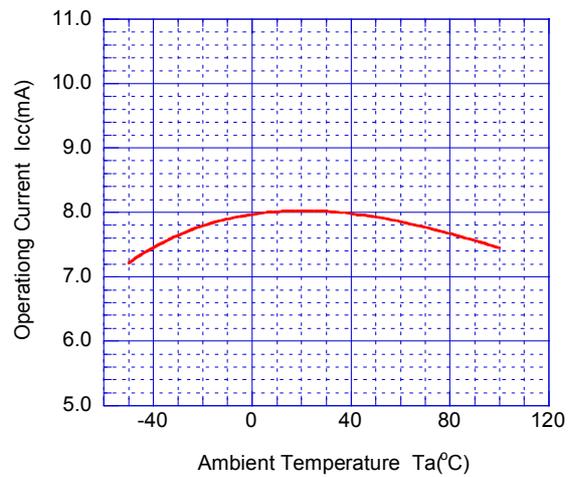


Operating Current at Standby State vs. Temperature

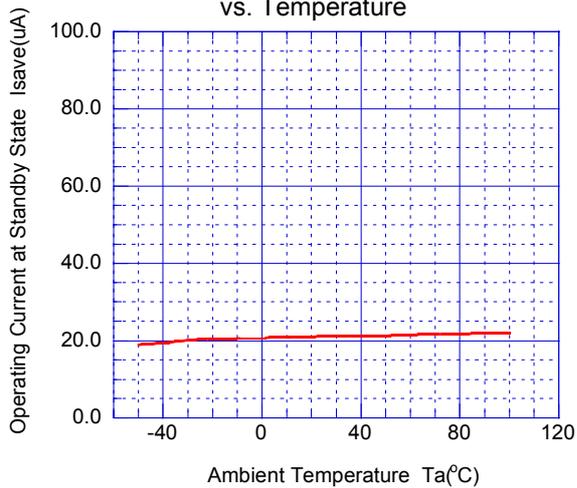


Maximum Output Voltage Swing vs. Temperature (Clamp+LPF Type Input)
Total Harmonic Distortion=1%, 1kHz

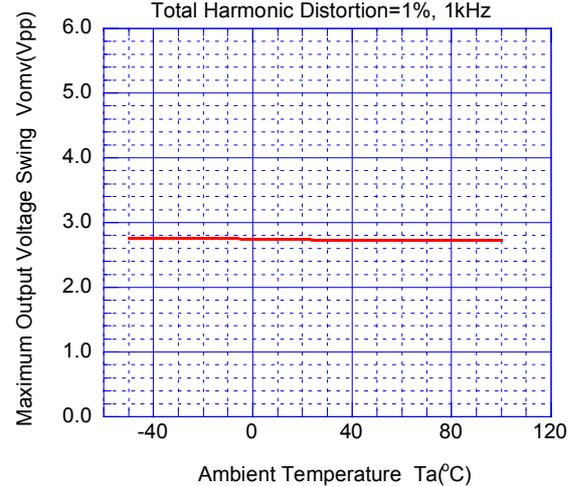

Maximum Output Voltage Swing vs. Temperature (Bias+Through Type Input)
Total Harmonic Distortion=1%, 1kHz

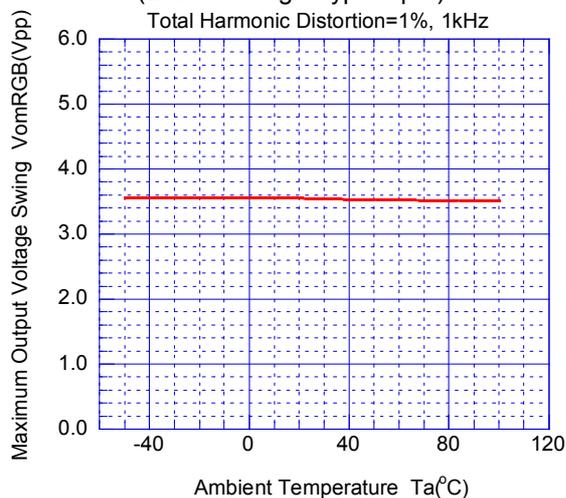


Gain Frequency Characteristics vs. Temperature (Bias+Through Type Input)
0.5Vpp, 20MHz/100kHz

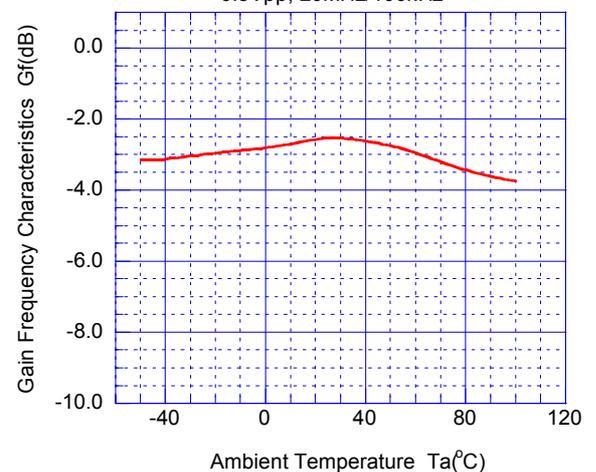


■ TYPICAL CHARACTERISTICS


Low Pass Filter Characteristic 1 vs. Temperature
(Clamp+LPF Type Input)
0.5Vpp, 4.5MHz/100kHz

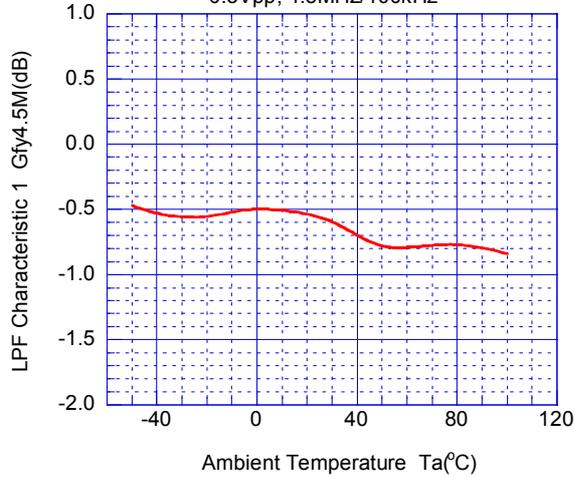


Low Pass Filter Characteristic 2 vs. Temperature
(Clamp+LPF Type Input)
0.5Vpp, 8MHz/100kHz

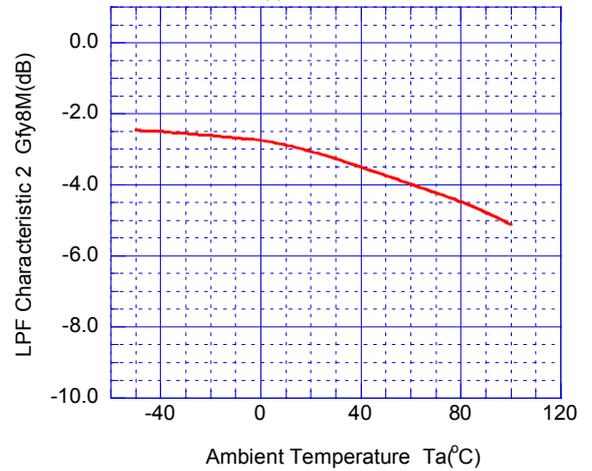


Low Pass Filter Characteristic 3 vs. Temperature
(Clamp+LPF Type Input)
0.5Vpp, 23.5MHz/100kHz

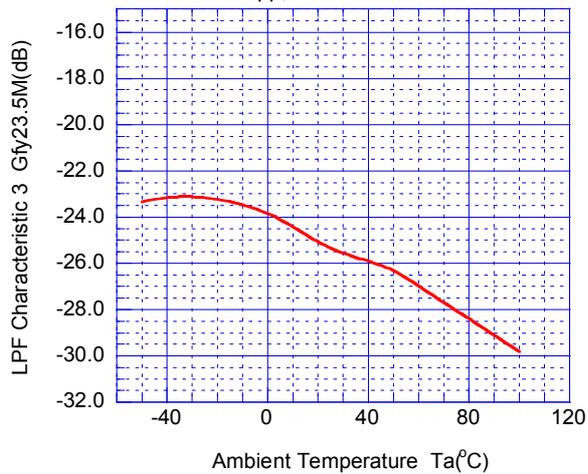


Differential Gain vs. Temperature
0.5Vpp, 10step video signal input

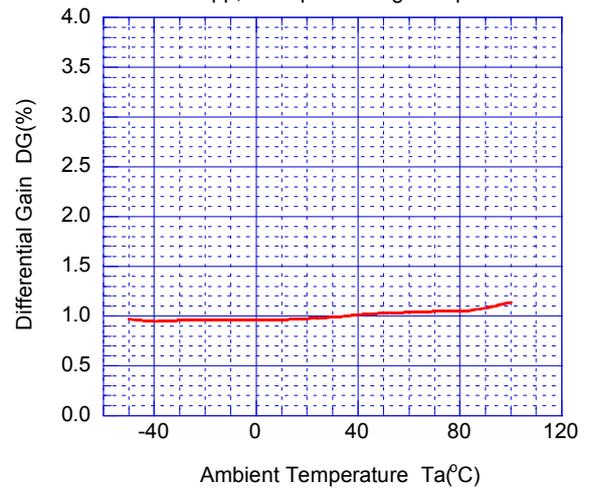



Differential Phase vs. Temperature
0.5Vpp, 10step video signal input

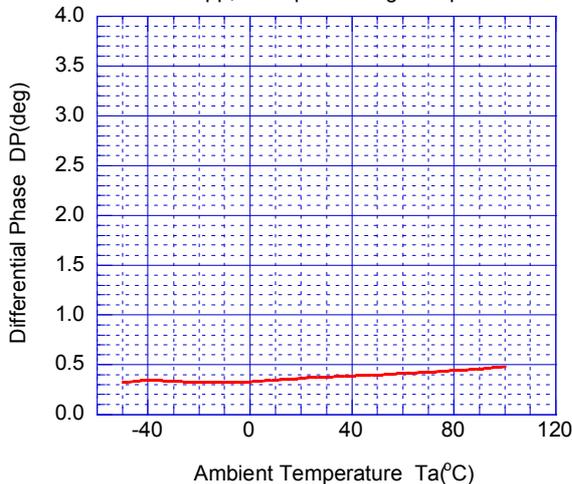


Signal to Noise Ratio vs. Temperature
0.5Vpp, 100% white video signal input, 100kHz-6MHz

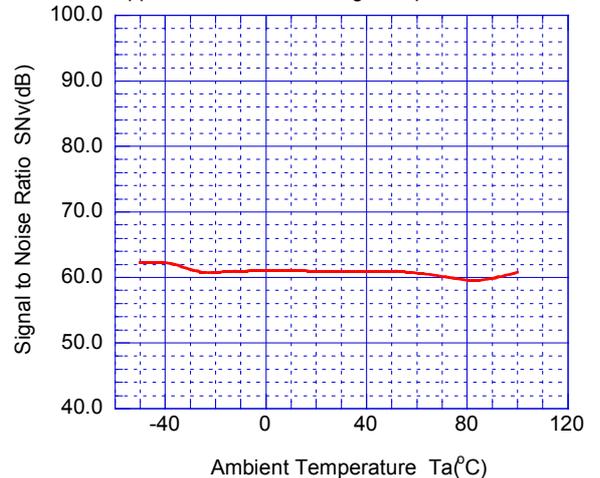

■ TYPICAL CHARACTERISTICS

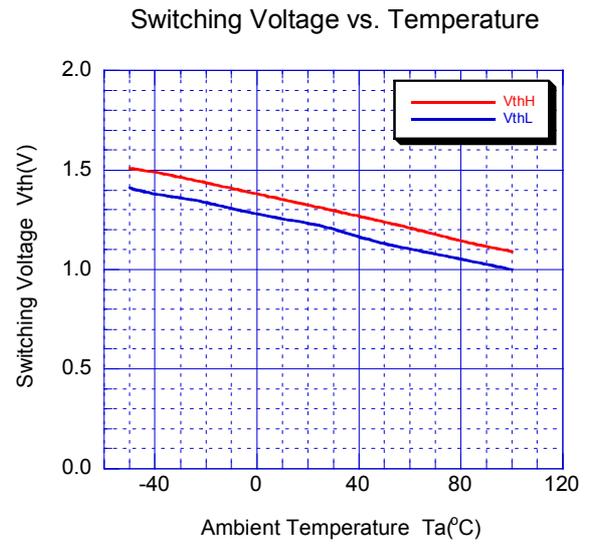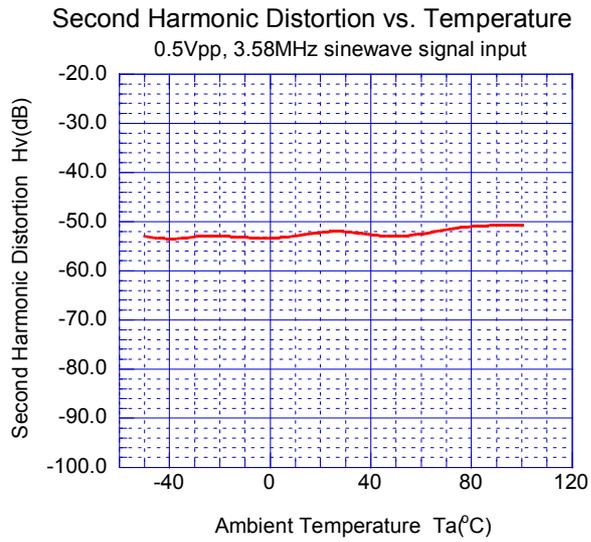

PowerSave Switching Voltage vs. Temperature

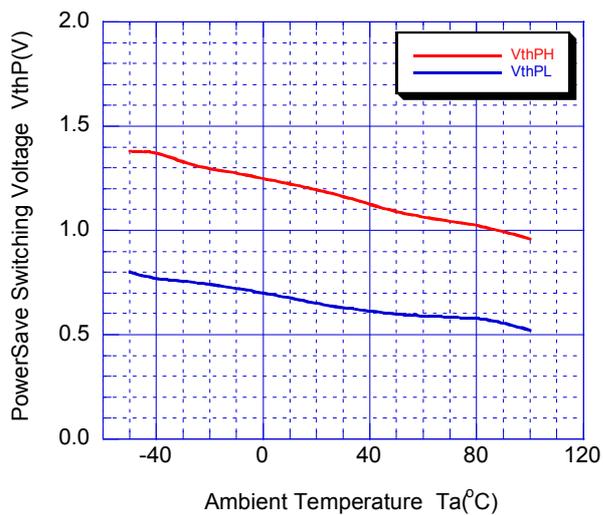

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2574RB1-TE2](#) [NJM2574RB1-TE1](#)