


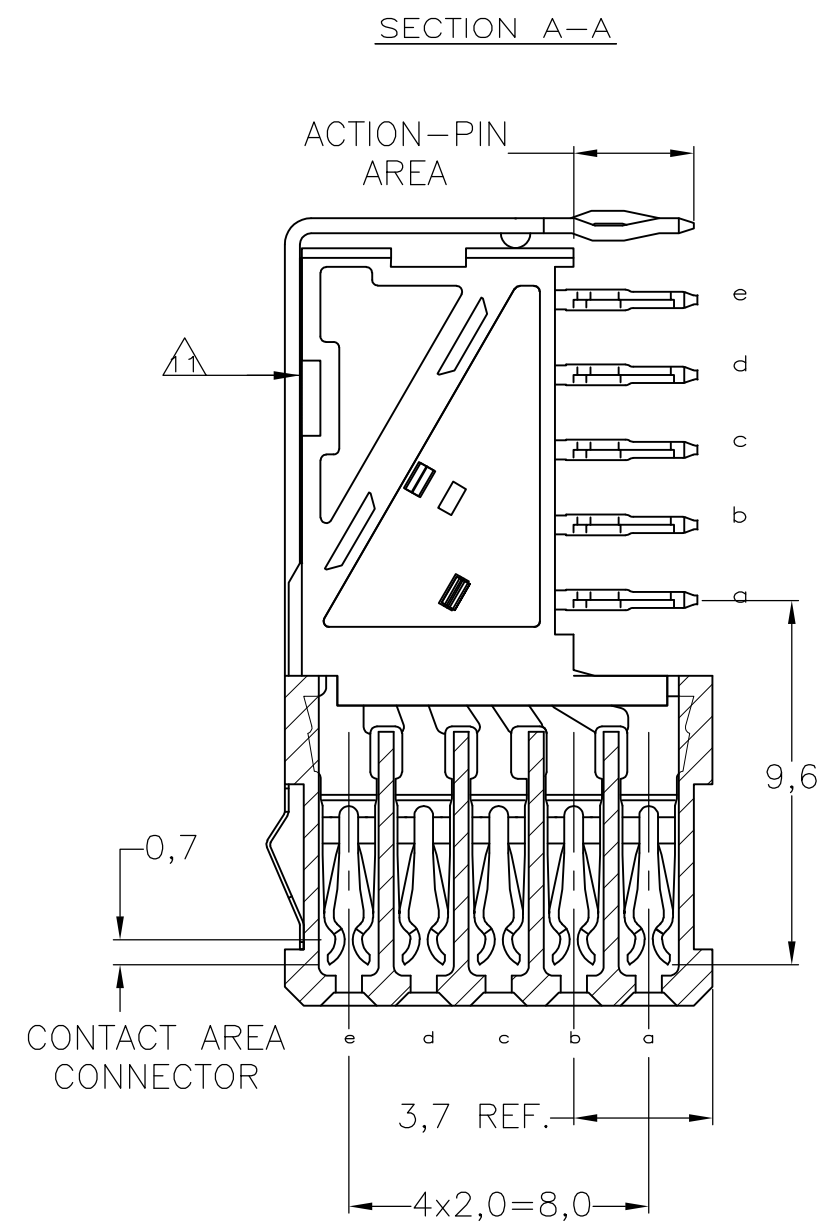

- 1 MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR LUBRICATED WITH TELCORDIA APPROVED LUBRICANT.
- 8 ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
- 9 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-22 COLUMNS
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- 10 ROW "f" 11 PLATED THROUGH HOLES FOR UPPERSHIELD
- 11 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
- 12 BASIC P.N. LOWERSHIELD: 352468
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 14 0.76µm MIN GOLD PLATING ON MATING SURFACES

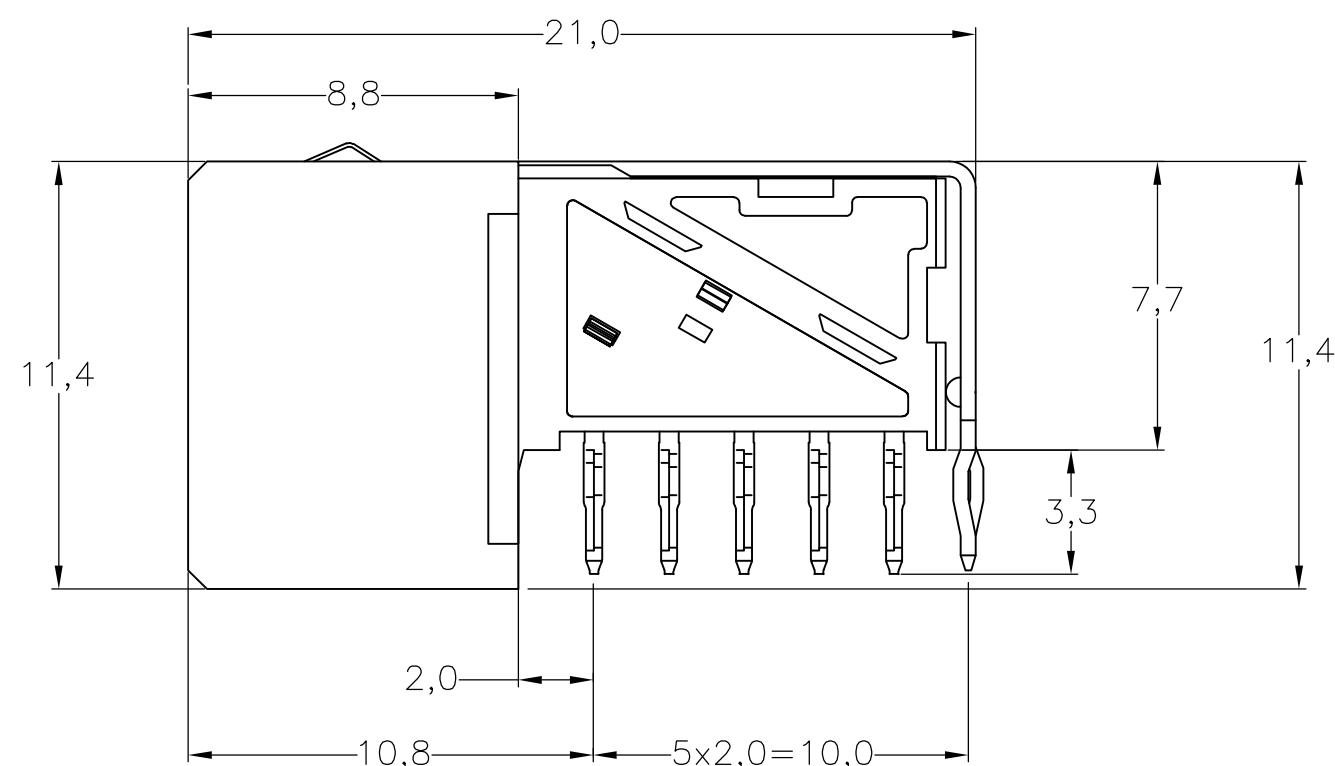


Diagram illustrating the geometry and dimensions of a rectangular plate with a grid of holes.

Dimensions:

- Width: $10 \times 4.0 = 40.0$
- Height: $2 \times 5.0 = 10.0$

Hole Pattern:

- Grid: 21×10 holes.
- Vertical spacing between rows: $4 \times 2.0 = 8.0$ (plus 2.0 for the top row, total 10.0).
- Horizontal spacing between holes: 4.0.

Labels:

- Vertical axis labels: f, e, d, c, b, a.
- Horizontal axis labels: 1, 1.5.
- Bottom right corner: ALL HOLES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN	23SEP96	 TE Connectivity	
DIMENSIONS: mm		CHK —	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	NAME	Z-PACK 2MM HM	
		PRODUCT SPEC 108-19082	TYPE B - 22 COLUMNS		RESTRICTED TO —
0 PLC — ± — 1 PLC — ± — 2 PLC — ± — ±0.2 3 PLC — ± — 4 PLC — ± — ANGLES — ± —		APPLICATION SPEC 114-19029	SIZE A2	CAGE CODE 00779	
MATERIAL —	FINISH —	WEIGHT —	DRAWING NO C=352152		SCALE NTS
RESTRICTED CUSTOMER			SHEET 1	OF 1	REV —