


# SP1008 Series 6pF 15kV Bidirectional Discrete TVS Protection



## Description

The SP1008 includes back-to-back TVS diodes fabricated in a proprietary silicon avalanche technology to provide protection for electronic equipment that may experience destructive electrostatic discharges (ESD). These robust diodes can safely absorb repetitive ESD strikes above the maximum level specified in the IEC61000-4-2 international standard ( $\pm 15\text{kV}$  contact discharge) without performance degradation. The back-to-back configuration provides symmetrical ESD protection for data lines when AC signals are present.

## Pinout




Note: Drawing not to scale

## Features

- ESD, IEC61000-4-2,  $\pm 15\text{kV}$  contact,  $\pm 15\text{kV}$  air
- EFT, IEC61000-4-4, 40A (5/50ns)
- Lightning, IEC61000-4-5, 3A ( $t_p=8/20\mu\text{s}$ )
- Low capacitance of 6pF (@  $V_R=5\text{V}$ )
- Low leakage current of  $0.1\mu\text{A}$  at 5V
- Space efficient 0201 footprint

## Functional Block Diagram




## Applications

- Mobile phones
- MP3/PMP
- PDA
- Camcorders
- Smart phones
- External storage
- Tablets
- Digital cameras

## Additional Information



## Application Example

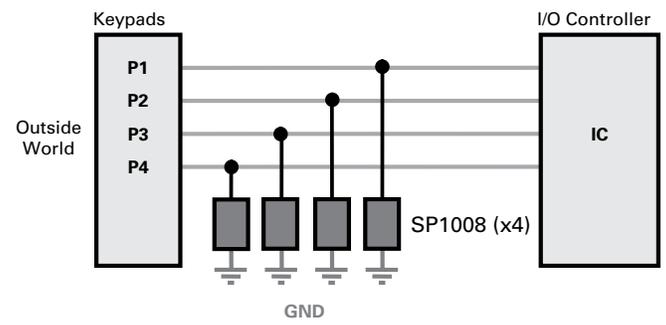

Life Support Note:  
**Not Intended for Use in Life Support or Life Saving Applications**  
 The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

### Absolute Maximum Ratings

Symbol	Parameter	Value	Units
$I_{PP}$	Peak Current ( $t_p=8/20\mu s$ )	3.0	A
$T_{OP}$	Operating Temperature	-40 to 125	°C
$T_{STOR}$	Storage Temperature	-55 to 150	°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

### Thermal Information

Parameter	Rating	Units
Storage Temperature Range	-55 to 150	°C
Maximum Junction Temperature	150	°C
Maximum Lead Temperature (Soldering 20-40s)	260	°C


### Electrical Characteristics ( $T_{OP}=25^\circ C$ )

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	$V_{RWM}$				6.0	V
Breakdown Voltage	$V_{BR}$	$I_R=1mA$		7.0	8.5	V
Leakage Current	$I_{LEAK}$	$V_R=5V$ with 1 pin at GND		0.1		$\mu A$
Clamp Voltage <sup>1</sup>	$V_C$	$I_{PP}=1A$ , $t_p=8/20\mu s$ , Fwd		10.7		V
		$I_{PP}=2A$ , $t_p=8/20\mu s$ , Fwd		12.0		V
Dynamic Resistance	$R_{DYN}$	$(V_{C2} - V_{C1}) / (I_{PP2} - I_{PP1})$		1.3		$\Omega$
ESD Withstand Voltage <sup>1</sup>	$V_{ESD}$	IEC61000-4-2 (Contact Discharge)	$\pm 15$			kV
		IEC61000-4-2 (Air Discharge)	$\pm 15$			kV
Diode Capacitance <sup>1</sup>	$C_D$	Reverse Bias=5.0V		6	9	pF


Note:

<sup>1</sup>Parameter is guaranteed by design and/or device characterization.


**Capacitance vs. Reverse Bias**

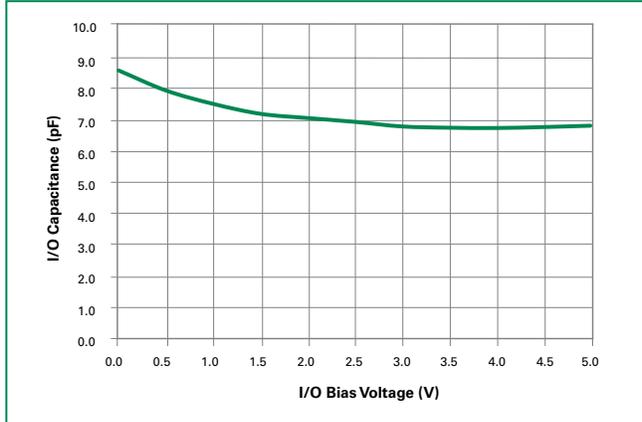


**Insertion Loss (S21) I/O to GND**

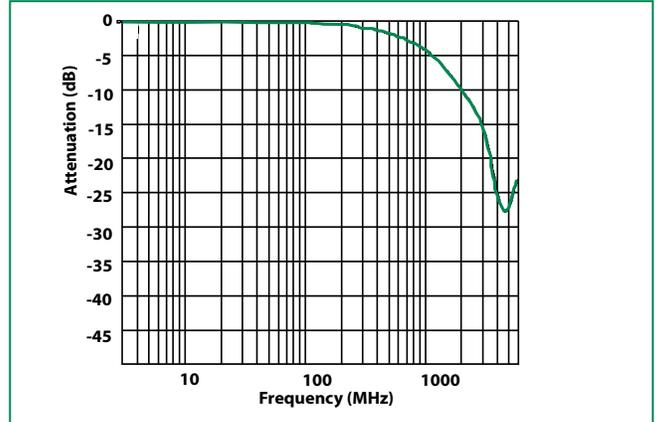

**Pulse Waveform**

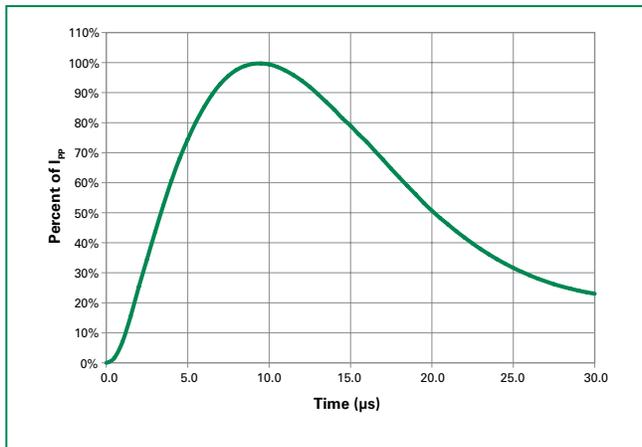


**Clamping Voltage vs. I<sub>pp</sub>**

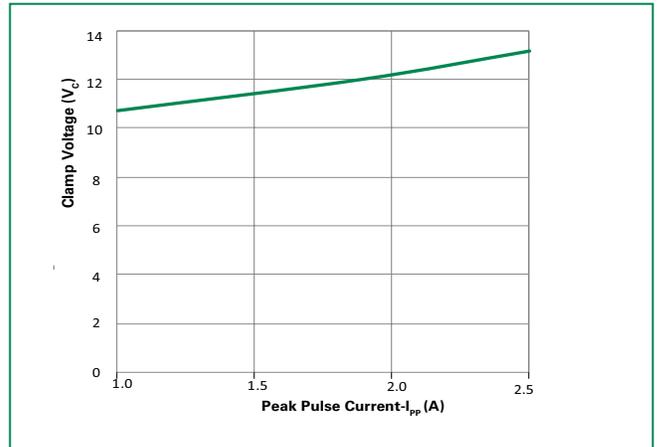


**Soldering Parameters**

Reflow Condition	Pb – Free assembly	
Pre Heat	- Temperature Min (T <sub>s(min)</sub> )	150°C
	- Temperature Max (T <sub>s(max)</sub> )	200°C
	- Time (min to max) (t <sub>s</sub> )	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T <sub>L</sub> ) to peak	3°C/second max	
T <sub>S(max)</sub> to T <sub>L</sub> - Ramp-up Rate	3°C/second max	
Reflow	- Temperature (T <sub>L</sub> ) (Liquidus)	217°C
	- Temperature (t <sub>L</sub> )	60 – 150 seconds
Peak Temperature (T <sub>p</sub> )	260 <sup>+0/-5</sup> °C	
Time within 5°C of actual peak Temperature (t <sub>p</sub> )	20 – 40 seconds	
Ramp-down Rate	6°C/second max	
Time 25°C to peak Temperature (T <sub>p</sub> )	8 minutes Max.	
Do not exceed	260°C	

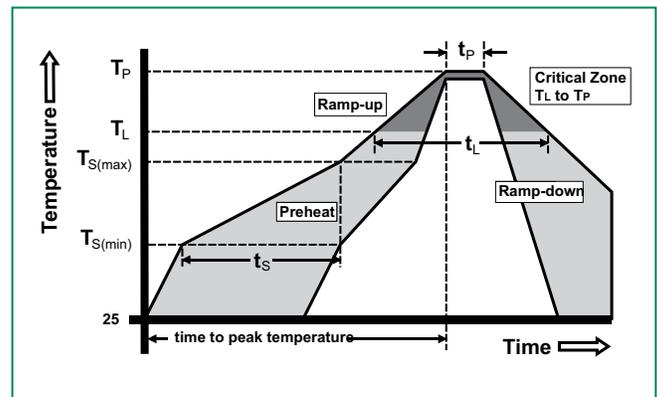

**Part Numbering System**

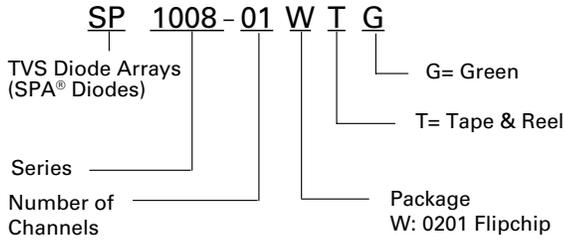


**Ordering Information**

Part Number	Package	Marking	Min. Order Qty.
SP1008-01WTG	0201 Flipchip	X	10000

**Part Marking System**





**Package Dimensions — 0201 Flip Chip**

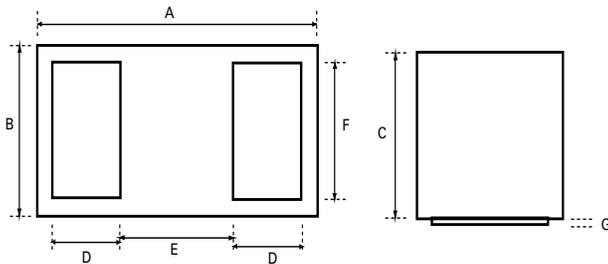

Symbol	0201 Flipchip					
	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
<b>A</b>	0.595	0.620	0.645	0.0234	0.0244	0.0254
<b>B</b>	0.295	0.320	0.345	0.0116	0.0126	0.0136
<b>C</b>	0.245	0.275	0.305	0.0096	0.0108	0.0120
<b>D</b>	0.145	0.150	0.155	0.0057	0.0059	0.0061
<b>E</b>	0.245	0.250	0.255	0.0096	0.0098	0.0100
<b>F</b>	0.245	0.250	0.255	0.0096	0.0098	0.0100
<b>G</b>	0.005	0.010	0.015	0.0002	0.0004	0.0006

**Embossed Carrier Tape & Reel Specification — 0201 Flipchip**

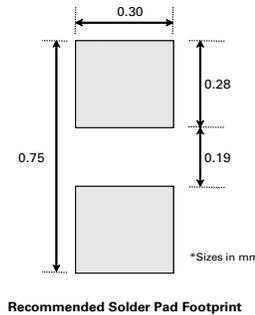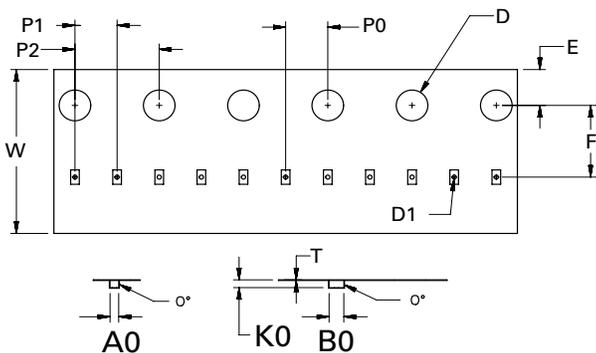

Symbol	Millimeters
<b>A0</b>	0.41±0.03
<b>B0</b>	0.70±0.03
<b>D</b>	∅ 1.50 + 0.10
<b>D1</b>	∅ 0.20 ± 0.05
<b>E</b>	1.75±0.10
<b>F</b>	3.50±0.05
<b>K0</b>	0.38±0.03
<b>P0</b>	2.00±0.05
<b>P1</b>	2.00±0.05
<b>P2</b>	4.00±0.10
<b>W</b>	8.00 + 0.30 -0.10
<b>T</b>	0.23±0.02