

10

9

8

7

6

5

4

3

2

1

注記 NOTE

- ① 適合ターミナル: 500978*00
APPLICABLE: 500978*00

- ② トレードマーク: MXJにて表示。

キャビティー番号: 1桁から2桁の数字にて表示。 金型番号: アルファベット1文字にて表示。






TRADE MARK IS FORMED BY MXJ.

AND BY 1-2 DIGIT NUMBER (TO CAVITY NO.)


AND BY 1 LETTER OD ALPHABET (TO MOLD NO.)

3. ELV及びRoHS適合品

ELV AND RoHS COMPLIANT.

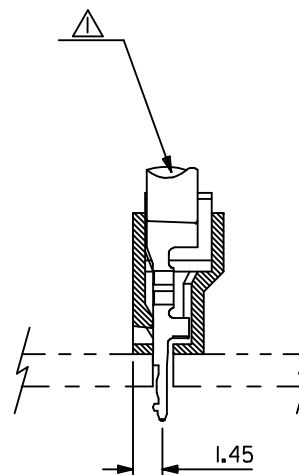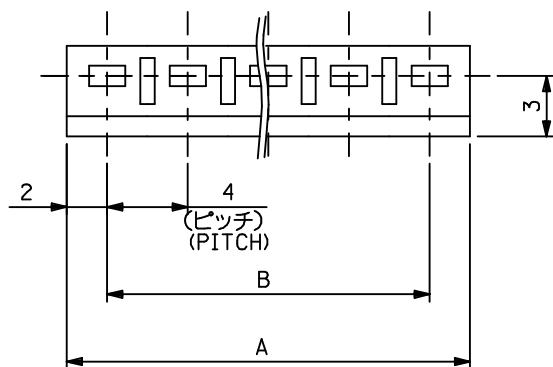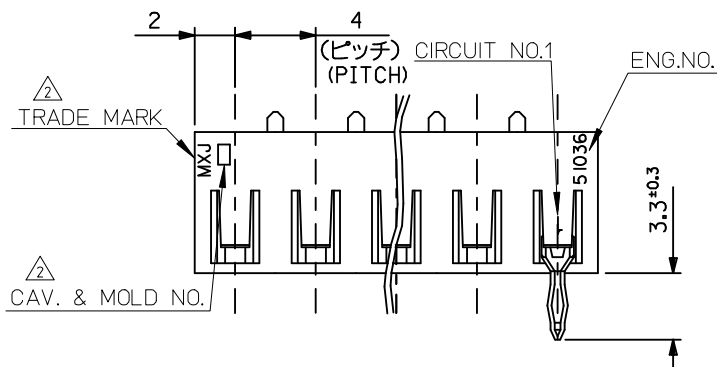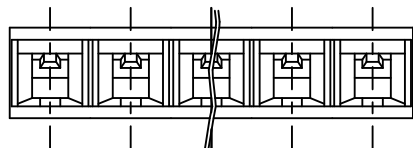

(公差非累積)
(NON-ACCUMULATIVE)

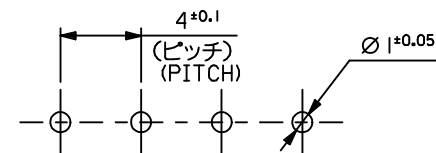

基板取付穴推奨寸法 (基板厚: 1.6mm)

RECOMMENDED PC BOARD
HOLE DIMENSION
(THICKNESS: 1.6mm)

56	60	51036	1500	15
52	56		1400	14
48	52		1300	13
44	48		1200	12
40	44		1100	11
36	40		1000	10
32	36		0900	9
28	32		0800	8
24	28		0700	7
20	24		0600	6
16	20		0500	5
12	16		0400	4
8	12		0300	3
4	8	51036	0200	2
B	A	ENG.NO.		部 Ckt.

材料 MATERIAL	POLYAMIDE,UL94V-0
適用電線範囲 WIRE RANGE	AWG#22~18,AV0.5~0.85 AVS0.3~0.85
被覆外径 INS. RANGE	φ1.8~2.6

REVISED EC NO.: J2012-0915 2012/01/20 DRWN:KASHIO 2013/05/28 CHKD:KASAKAWA 2013/05/28 APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY KSANO	DATE 1996/06/30	TITLE 4.0 BOARD IN CONNECTOR HOUSING			
		10 OVER 30 UNDER	± 0.25	CHECKED BY MSAKANO	DATE 1996/06/30				
		30 OVER	± 0.3	APPROVED BY MENOMOTO	DATE 1996/06/30	DOCUMENT NO. molex SD-51036-001			
		ANGULAR ±3 °		MATERIAL NO. SEE CHART					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5

4

3

2