

# SN74AHC595 8-Bit Shift Registers With 3-State Output Registers

## 1 Features

- Operating range: 2V to 5.5V V<sub>CC</sub>
- 8-bit serial-in, parallel-out shift
- Latch-up performance exceeds 100mA per JESD 78, class II
- ESD protection exceeds JESD 22
  - 2000V human-body model (A114-A)
  - 1000V charged-device model (C101)

## 2 Applications

- Network Switches
- Power Infrastructures
- LED Displays
- Servers

## 3 Description

The SN74AHC595 device contains an 8-bit serial-in, parallel-out shift register that feeds an 8-bit D-type storage register. The storage register has parallel 3-state outputs. Separate clocks are provided for both the shift and storage registers. The shift register has a direct overriding clear (SRCLR) input, a serial (SER) input, and a serial output for cascading. When the output-enable (OE) input is high, all outputs except QH' are in the high-impedance state.

### Package Information

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>	BODY SIZE <sup>(3)</sup>
SN74AHC595	BQB (WQFN, 16)	3.5mm × 2.5mm	3.5mm × 2.5mm
	N (PDIP, 16)	19.31mm × 9.4mm	19.31mm × 6.35mm
	D (SOIC, 16)	9.90 mm × 6mm	9.90mm × 3.90mm
	DB (SSOP, 16)	6.20mm × 7.8mm	6.20mm × 5.30mm
	PW (TSSOP, 16)	5.00mm × 6.4mm	5.00 mm × 4.40 mm


(1) For more information, see [Section 11](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.

(3) The body size (length x width) is a nominal value and does not include pins.



An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

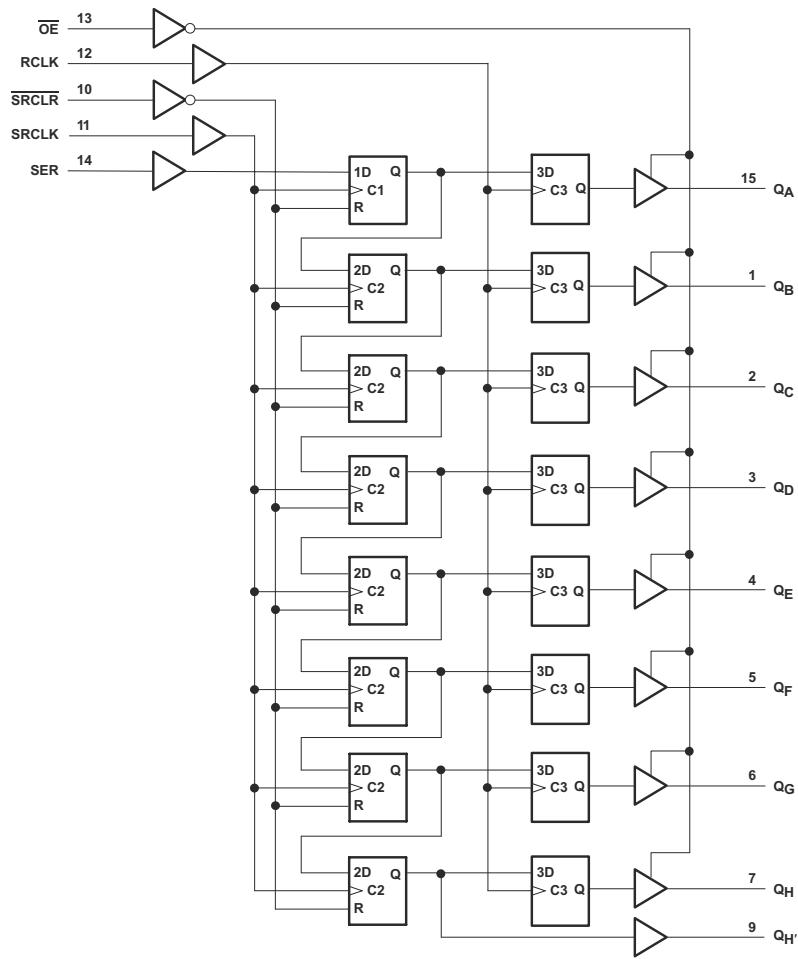

Logic Diagram (Positive Logic)

## Table of Contents

<b>1 Features</b> .....	<b>1</b>	7.2 Functional Block Diagram.....	<b>14</b>
<b>2 Applications</b> .....	<b>1</b>	7.3 Feature Description.....	<b>15</b>
<b>3 Description</b> .....	<b>1</b>	7.4 Device Functional Modes.....	<b>15</b>
<b>4 Pin Configuration and Functions</b> .....	<b>4</b>	<b>8 Application and Implementation</b> .....	<b>16</b>
<b>5 Specifications</b> .....	<b>5</b>	8.1 Application Information.....	<b>16</b>
5.1 Absolute Maximum Ratings.....	<b>5</b>	8.2 Typical Application.....	<b>16</b>
5.2 ESD Ratings.....	<b>5</b>	8.3 Power Supply Recommendations.....	<b>18</b>
5.3 Recommended Operating Conditions.....	<b>5</b>	8.4 Layout.....	<b>18</b>
5.4 Thermal Information.....	<b>6</b>	<b>9 Device and Documentation Support</b> .....	<b>19</b>
5.5 Electrical Characteristics.....	<b>6</b>	9.1 Documentation Support.....	<b>19</b>
5.6 Timing Requirements: $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ .....	<b>7</b>	9.2 Receiving Notification of Documentation Updates.....	<b>19</b>
5.7 Timing Requirements: $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ .....	<b>8</b>	9.3 Support Resources.....	<b>19</b>
5.8 Switching Characteristics: $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ .....	<b>8</b>	9.4 Trademarks.....	<b>19</b>
5.9 Switching Characteristics: $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ .....	<b>10</b>	9.5 Electrostatic Discharge Caution.....	<b>19</b>
5.10 Operating Characteristics.....	<b>11</b>	9.6 Glossary.....	<b>19</b>
5.11 Typical Characteristics.....	<b>12</b>	<b>10 Revision History</b> .....	<b>19</b>
<b>6 Parameter Measurement Information</b> .....	<b>13</b>	<b>11 Mechanical, Packaging, and Orderable</b> <b>Information</b> .....	<b>19</b>
<b>7 Detailed Description</b> .....	<b>14</b>		
7.1 Overview.....	<b>14</b>		

## 4 Pin Configuration and Functions




Figure 4-1. D, DB, N, PW Packages 16-Pin SOIC,  
SSOP, PDIP, TSSOP (Top View)




Figure 4-2. BQB Package, 16-Pin WQFN (Top View)

Table 4-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
GND	8	—	Ground Pin
OE	13	I	Output Enable
QA	15	O	QA Output
QB	1	O	QB Output
QC	2	O	QC Output
QD	3	O	QD Output
QE	4	O	QE Output
QF	5	O	QF Output
QG	6	O	QG Output
QH	7	O	QH Output
QH'	9	O	QH' Output
RCLK	12	I	RCLK Input
SER	14	I	SER Input
SRCLK	11	I	SRCLK Input
SRCLR	10	I	SRCLR Input
V <sub>CC</sub>	16	—	Power Pin

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		-0.5	7	V
V <sub>I</sub>	Input voltage <sup>(2)</sup>	(V <sub>I</sub> < 0)	-0.5	7	V
V <sub>O</sub>	Output voltage <sup>(2)</sup>	(V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> )	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	(V <sub>I</sub> = 0 to V <sub>CC</sub> )		-20	mA
I <sub>OK</sub>	Output clamp current	(V <sub>O</sub> = 0 to V <sub>CC</sub> )		±20	mA
I <sub>O</sub>	Continuous output current	(V <sub>O</sub> = 0 to V <sub>CC</sub> )		±25	mA
	Continuous current through V <sub>CC</sub> or GND			±75	mA
T <sub>J</sub>	Junction temperature			150	°C
T <sub>stg</sub>	Storage temperature		-65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

### 5.2 ESD Ratings

		VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000
		Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±1000

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage		2	5.5	V	
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 2 V	1.5			
		V <sub>CC</sub> = 3 V	2.1			
		V <sub>CC</sub> = 5.5 V	3.85			
V <sub>IL</sub>	Low-level Input voltage	V <sub>CC</sub> = 2 V		0.5		
		V <sub>CC</sub> = 3 V		0.9		
		V <sub>CC</sub> = 5.5 V		1.65		
V <sub>I</sub>	Input voltage		0	5.5	V	
V <sub>O</sub>	Output voltage		0	V <sub>CC</sub>	V	
I <sub>OH</sub>	High-level output current	V <sub>CC</sub> = 2 V		-50	μA	
		V <sub>CC</sub> = 3.3 V ± 0.3 V		-4		
		V <sub>CC</sub> = 5 V ± 0.5 V		-8	mA	
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 2 V		50	μA	
		V <sub>CC</sub> = 3.3 V ± 0.3 V		4		
		V <sub>CC</sub> = 5 V ± 0.5 V		8	mA	
Δt/Δv	Input transition rise or fall rate	V <sub>CC</sub> = 3.3 V ± 0.3 V		100		
		V <sub>CC</sub> = 5 V ± 0.5 V		20	ns/V	
T <sub>A</sub>	Operating free-air temperature		-40	125	°C	

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, [SCBA004](#).

## 5.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		SN74AHC595					UNIT
		BQB (WQFN)	D (SOIC)	DB (SSOP)	N (PDIP)	PW (TSSOP)	
		16 PINS	16 PINS	16 PINS	16 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	91.8	93.8	97.8	47.8	135.9	°C/W
$R_{\theta JC(\text{top})}$	Junction-to-case (top) thermal resistance	87.7	54.7	48.1	35.1	70.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	61.6	50.9	48.5	27.8	81.3	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	11.9	20.8	10.0	20.1	22.5	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	61.4	50.7	47.9	27.7	80.8	°C/W
$R_{\theta JC(\text{bot})}$	Junction-to-case (bottom) thermal resistance	39.4	—	—	—	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

PARAMETER	TEST CONDITIONS			$V_{CC}$	MIN	TYP	MAX	UNIT
$V_{OH}$	$I_{OH} = -50 \mu A$	$T_A = 25^\circ C$		2 V	1.9	2		V
		$T_A = -40^\circ C$ to $85^\circ C$			1.9			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			1.9			
	$I_{OH} = -50 \mu A$	$T_A = 25^\circ C$		3 V	2.9	3		
		$T_A = -40^\circ C$ to $85^\circ C$			2.9			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			2.9			
	$I_{OH} = -50 \mu A$	$T_A = 25^\circ C$		4.5 V	4.4	4.5		
		$T_A = -40^\circ C$ to $85^\circ C$			4.4			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			4.4			
	$I_{OH} = -4 mA$	$T_A = 25^\circ C$		3 V	2.58			
		$T_A = -40^\circ C$ to $85^\circ C$			2.48			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			2.48			
	$I_{OH} = -8 mA$	$T_A = 25^\circ C$		4.5 V	3.94			
		$T_A = -40^\circ C$ to $85^\circ C$			3.8			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			3.8			
$V_{OL}$	$I_{OL} = 50 \mu A$	$T_A = 25^\circ C$		2 V	0.1			V
		$T_A = -40^\circ C$ to $85^\circ C$			0.1			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			0.1			
	$I_{OL} = 50 \mu A$	$T_A = 25^\circ C$		3 V	0.1			
		$T_A = -40^\circ C$ to $85^\circ C$			0.1			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			0.1			
	$I_{OL} = 50 \mu A$	$T_A = 25^\circ C$		4.5 V	0.1			
		$T_A = -40^\circ C$ to $85^\circ C$			0.1			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			0.1			
	$I_{OL} = 4 mA$	$T_A = 25^\circ C$		3 V	0.36			
		$T_A = -40^\circ C$ to $85^\circ C$			0.44			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			0.44			
	$I_{OL} = 8 mA$	$T_A = 25^\circ C$		4.5 V	0.36			
		$T_A = -40^\circ C$ to $85^\circ C$			0.44			
		$T_A = -40^\circ C$ to $125^\circ C$ Recommended			0.44			

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

PARAMETER	TEST CONDITIONS			V <sub>CC</sub>	MIN	TYP	MAX	UNIT			
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND	T <sub>A</sub> = 25°C		0 V to 5.5 V	±0.1		μA				
		T <sub>A</sub> = -40°C to 85°C			±1						
		T <sub>A</sub> = -40°C to 125°C Recommended			±1						
I <sub>OZ</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND, V <sub>O</sub> = V <sub>CC</sub> or GND, OE = V <sub>IH</sub> or V <sub>IL</sub> ,	Q <sub>A</sub> – Q <sub>H</sub>	T <sub>A</sub> = 25°C	5.5 V	±0.25		μA				
			T <sub>A</sub> = -40°C to 85°C		±2.5						
			T <sub>A</sub> = -40°C to 125°C Recommended		±2.5						
I <sub>CC</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND,	I <sub>O</sub> = 0	T <sub>A</sub> = 25°C	5.5 V	4		μA				
			T <sub>A</sub> = -40°C to 85°C		40						
			T <sub>A</sub> = -40°C to 125°C Recommended		40						
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	T <sub>A</sub> = 25°C		5 V	3		10	pF			
		T <sub>A</sub> = -40°C to 85°C			10						
C <sub>O</sub>	V <sub>O</sub> = V <sub>CC</sub> or GND,	T <sub>A</sub> = 25°C		5 V	5.5			pF			

(1) On products compliant to MIL-PRF-38535, this parameter is not production tested at V<sub>CC</sub> = 0 V.

## 5.6 Timing Requirements: V<sub>CC</sub> = 3.3 V ± 0.3 V

over recommended operating free-air temperature range (unless otherwise noted)

				MIN	MAX	UNIT	
t <sub>W</sub>	Pulse duration	SRCLK high or low	T <sub>A</sub> = 25°C	5		ns	
			T <sub>A</sub> = -40°C to 85°C	5			
			T <sub>A</sub> = -40°C to 125°C Recommended	6			
	RCLK high or low		T <sub>A</sub> = 25°C	5			
			T <sub>A</sub> = -40°C to 85°C	5			
			T <sub>A</sub> = -40°C to 125°C Recommended	6			
	SRCLR low		T <sub>A</sub> = 25°C	5			
			T <sub>A</sub> = -40°C to 85°C	5			
			T <sub>A</sub> = -40°C to 125°C Recommended	6.5			
t <sub>su</sub>	Set-up time	SER before SRCLK↑	T <sub>A</sub> = 25°C	3.5		ns	
			T <sub>A</sub> = -40°C to 85°C	3.5			
			T <sub>A</sub> = -40°C to 125°C Recommended	4.5			
	SRCLK↑ before RCLK↑ <sup>(1)</sup>		T <sub>A</sub> = 25°C	8			
			T <sub>A</sub> = -40°C to 85°C	8.5			
			T <sub>A</sub> = -40°C to 125°C Recommended	9.5			
	SRCLR low before RCLK↑		T <sub>A</sub> = 25°C	8			
			T <sub>A</sub> = -40°C to 85°C	9			
			T <sub>A</sub> = -40°C to 125°C Recommended	10			
	SRCLR high (inactive) before SRCLK↑		T <sub>A</sub> = 25°C	3			
			T <sub>A</sub> = -40°C to 85°C	3			
			T <sub>A</sub> = -40°C to 125°C Recommended	4			
t <sub>h</sub>	Hold time	SER after SRCLK↑	T <sub>A</sub> = 25°C	1.5		ns	
			T <sub>A</sub> = -40°C to 85°C	1.5			
			T <sub>A</sub> = -40°C to 125°C Recommended	2.5			

(1) This set-up time allows the storage register to receive stable data from the shift register. The clocks can be tied together, in which case the shift register is one clock pulse ahead of the storage register.

## 5.7 Timing Requirements: $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$

			MIN	NOM	MAX	UNIT
$t_W$	Pulse duration	SRCLK high or low	$T_A = 25^\circ\text{C}$	5		ns
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	6		
	RCLK high or low		$T_A = 25^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	6		
	SRCLR low		$T_A = 25^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	6.2		
$t_{SU}$	Set-up time	SER before SRCLK $\uparrow$	$T_A = 25^\circ\text{C}$	3		ns
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	3		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	4		
	SRCLK $\uparrow$ before RCLK $\uparrow$ <sup>(1)</sup>		$T_A = 25^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	6		
	SRCLR low before RCLK $\uparrow$		$T_A = 25^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	6		
	SRCLR high (inactive) before SRCLK $\uparrow$		$T_A = 25^\circ\text{C}$	2.5		
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	2.5		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	3.5		
$t_H$	Hold time	SER after SRCLK $\uparrow$	$T_A = 25^\circ\text{C}$	2		ns
			$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	2		
			$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	3		

(1) This set-up time allows the storage register to receive stable data from the shift register. The clocks can be tied together, in which case the shift register is one clock pulse ahead of the storage register.

## 5.8 Switching Characteristics: $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$

over operating free-air temperature range (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{max}$			$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	80 <sup>(1)</sup>	120 <sup>(1)</sup>		MHz
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	70			
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	60			
			$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	55	105		
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	50			
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	40			
$t_{PLH}$	RCLK	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	6 <sup>(1)</sup>	11.9 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	13.5		
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1	14.9		
$t_{PHL}$	RCLK	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	6 <sup>(1)</sup>	11.9 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	13.5		
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1	14.9		
$t_{PLH}$	SRCLK	$Q_{H'}$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.6 <sup>(1)</sup>	13 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	15		
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1	16.4		
$t_{PHL}$	SRCLK	$Q_{H'}$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.6 <sup>(1)</sup>	13 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	15		
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1	16.4		

over operating free-air temperature range (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PHL}$	$\overline{SRCLR}$	$Q_H'$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$		6.2 <sup>(1)</sup>	12.8 <sup>(1)</sup>	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		13.7	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		15	
$t_{PZH}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$		6 <sup>(1)</sup>	11.5 <sup>(1)</sup>	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		13.5	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		14.9	
$t_{PZL}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$		7.8 <sup>(1)</sup>	11.5 <sup>(1)</sup>	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		13.5	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		14.9	
$t_{PLH}$	$RCLK$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		7.9	15.4	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		17	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		18.6	
$t_{PHL}$	$RCLK$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		7.9	15.4	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		17	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		18.6	
$t_{PLH}$	$SRCLK$	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		9.2	16.5	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		18.5	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		20	
$t_{PHL}$	$SRCLK$	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		9.2	16.5	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		18.5	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		20	
$t_{PHL}$	$SRCLR$	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		9	16.3	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		17.2	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		18.7	
$t_{PZH}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		7.8	15	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		17	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		18.6	
$t_{PZL}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		9.6	15	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		17	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		18.6	
$t_{PHZ}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		8.1	15.7	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		16.2	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		17.4	
$t_{PLZ}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$		9.3	15.7	ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1		16.2	
				$T_A = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$ Recommended	1		17.4	


(1) On products compliant to MIL-PRF-38535, this parameter is not production tested.

## 5.9 Switching Characteristics: $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$

over operating free-air temperature range (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{max}$			$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	135 <sup>(1)</sup>	170 <sup>(1)</sup>		MHz
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	115			
			$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	95	140		
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	85			
$t_{PLH}$	RCLK	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.3 <sup>(1)</sup>	7.4 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	8.5		
$t_{PHL}$	RCLK	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.3 <sup>(1)</sup>	7.4 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	8.5		
$t_{PLH}$	SRCLK	$Q_H'$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.5 <sup>(1)</sup>	8.2 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	9.4		
$t_{PHL}$	SRCLK	$Q_H'$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.5 <sup>(1)</sup>	8.2 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	9.4		
$t_{PHL}$	$\overline{SRCLR}$	$Q_H'$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.5 <sup>(1)</sup>	8 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	9.1		
$t_{PZH}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	4.3 <sup>(1)</sup>	8.6 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	10		
$t_{PZL}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 15 \text{ pF}$	$T_A = 25^\circ\text{C}$	5.4 <sup>(1)</sup>	8.6 <sup>(1)</sup>		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	10		
$t_{PLH}$	RCLK	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	5.6	9.4		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	10.5		
$t_{PHL}$	RCLK	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	5.6	9.4		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	10.5		
$t_{PLH}$	SRCLK	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.4	10.2		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	11.4		
$t_{PHL}$	SRCLK	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.4	10.2		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	11.4		
$t_{PHL}$	$\overline{SRCLR}$	$Q_H'$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.4	10		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	11.1		
$t_{PZH}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	5.7	10.6		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	12		
$t_{PZL}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	6.8	10.6		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	12		
$t_{PHZ}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	3.5	10.3		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	11		
$t_{PLZ}$	$\overline{OE}$	$Q_A - Q_H$	$C_L = 50 \text{ pF}$	$T_A = 25^\circ\text{C}$	3.4	10.3		ns
				$T_A = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	1	11		

(1) On products compliant to MIL-PRF-38535, this parameter is not production tested.

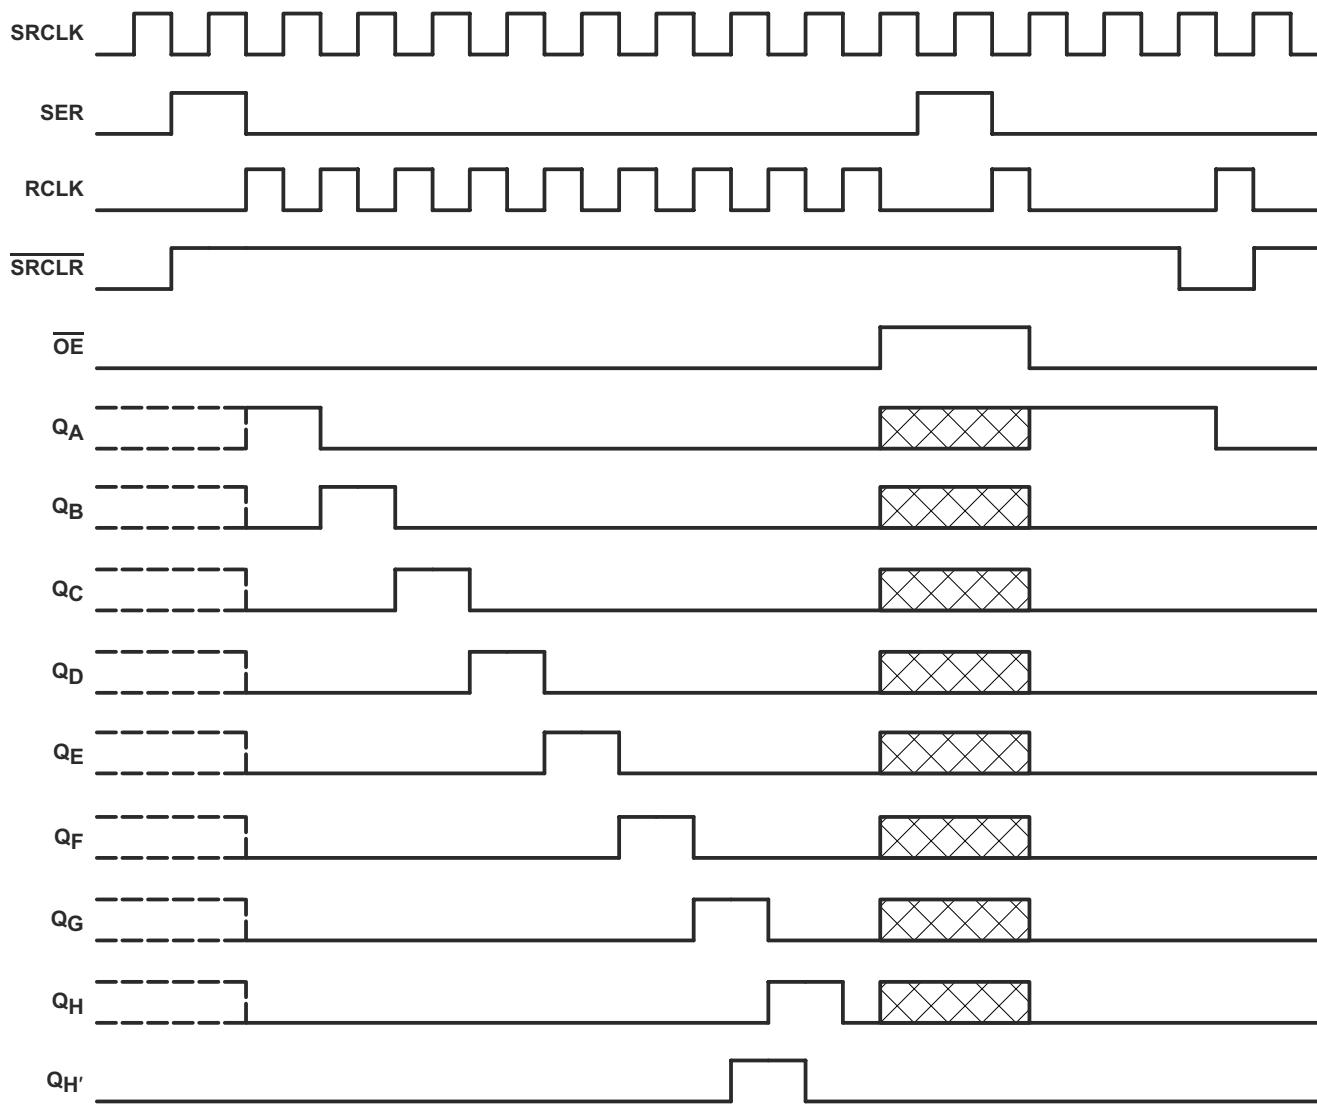

NOTE:  implies that the output is in 3-State mode.


**Figure 5-1. Timing Diagram**

## 5.10 Operating Characteristics

$V_{CC} = 5$  V,  $T_A = 25^\circ\text{C}$


PARAMETER		TEST CONDITIONS	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	No load, $f = 1$ MHz	25.2	pF

## 5.11 Typical Characteristics

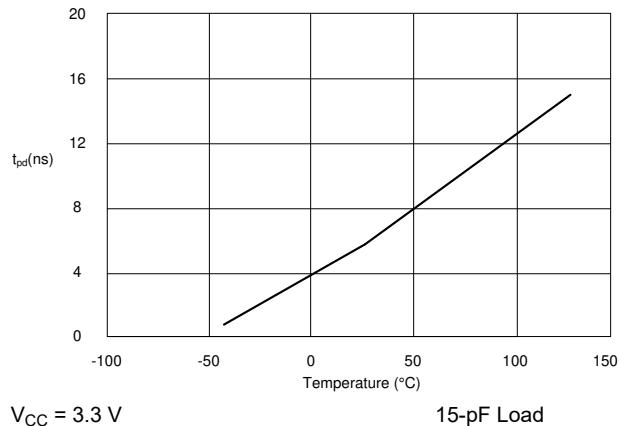

**Figure 5-2. SN74AHC595 RCLK to Q TPD vs Temperature**

## 6 Parameter Measurement Information

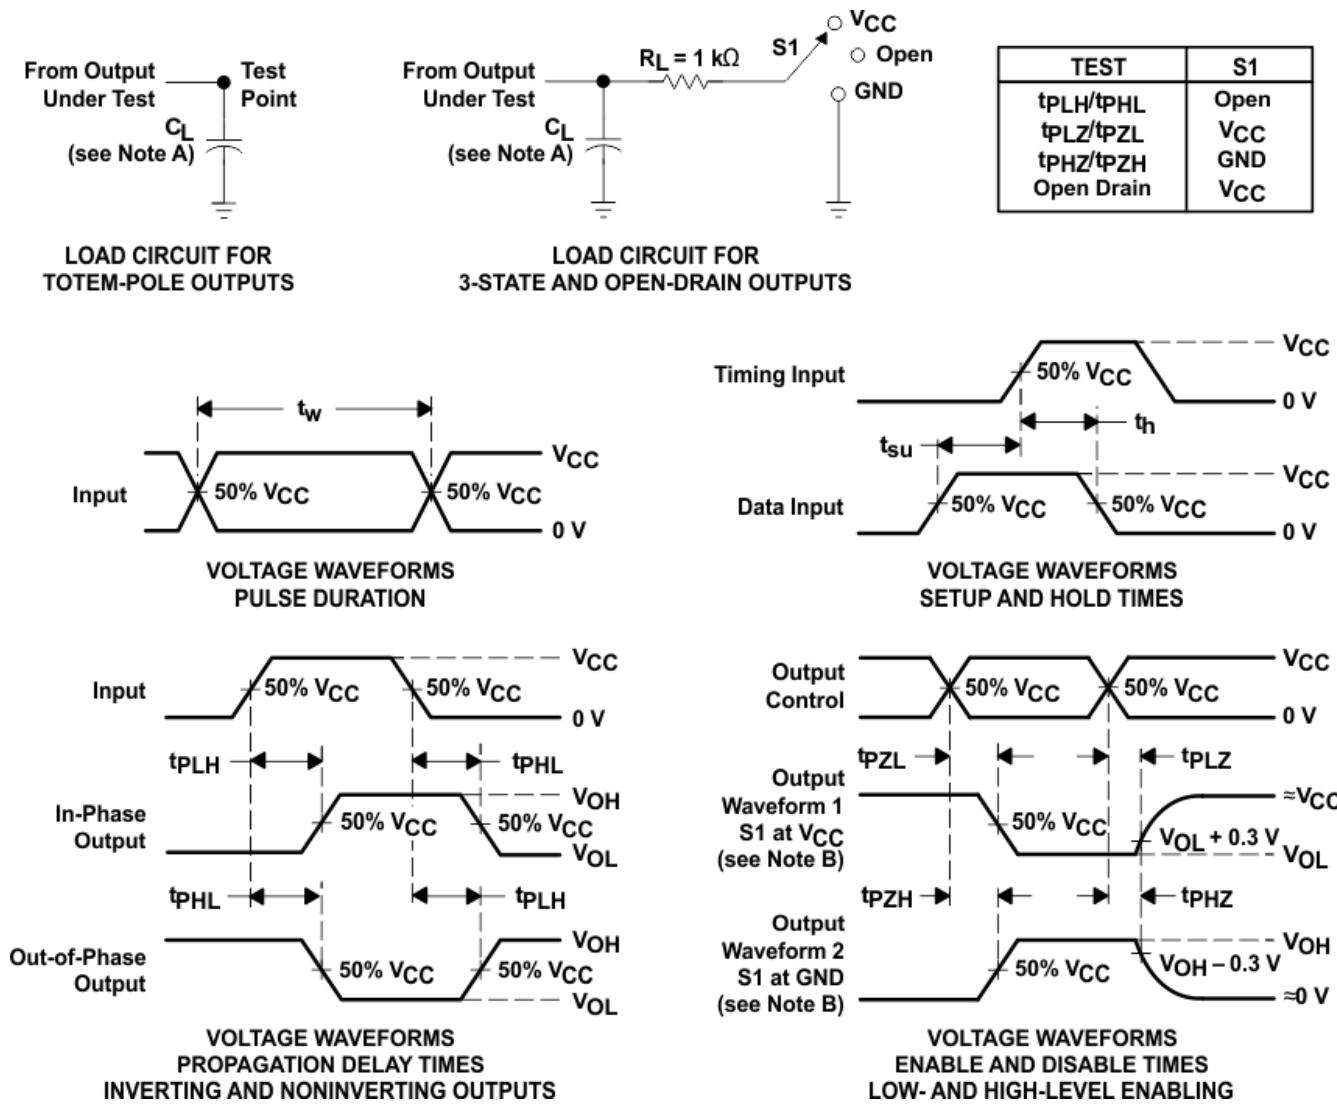

- A.  $C_L$  includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r \leq 3$  ns,  $t_f \leq 3$  ns.
- D. The outputs are measured one at a time with one input transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

**Figure 6-1. Load Circuit and Voltage Waveforms**


## 7 Detailed Description

### 7.1 Overview

The SN74AHC595 device is part of the AHC family of logic devices intended for CMOS applications. The SN74HC595 device is an 8-bit shift register that feeds an 8-bit D-type storage register.

Both the shift-register clock (SRCLK) and storage-register clock (RCLK) are positive-edge triggered. If both clocks are connected together, the shift register is always one clock pulse ahead of the storage register.

### 7.2 Functional Block Diagram

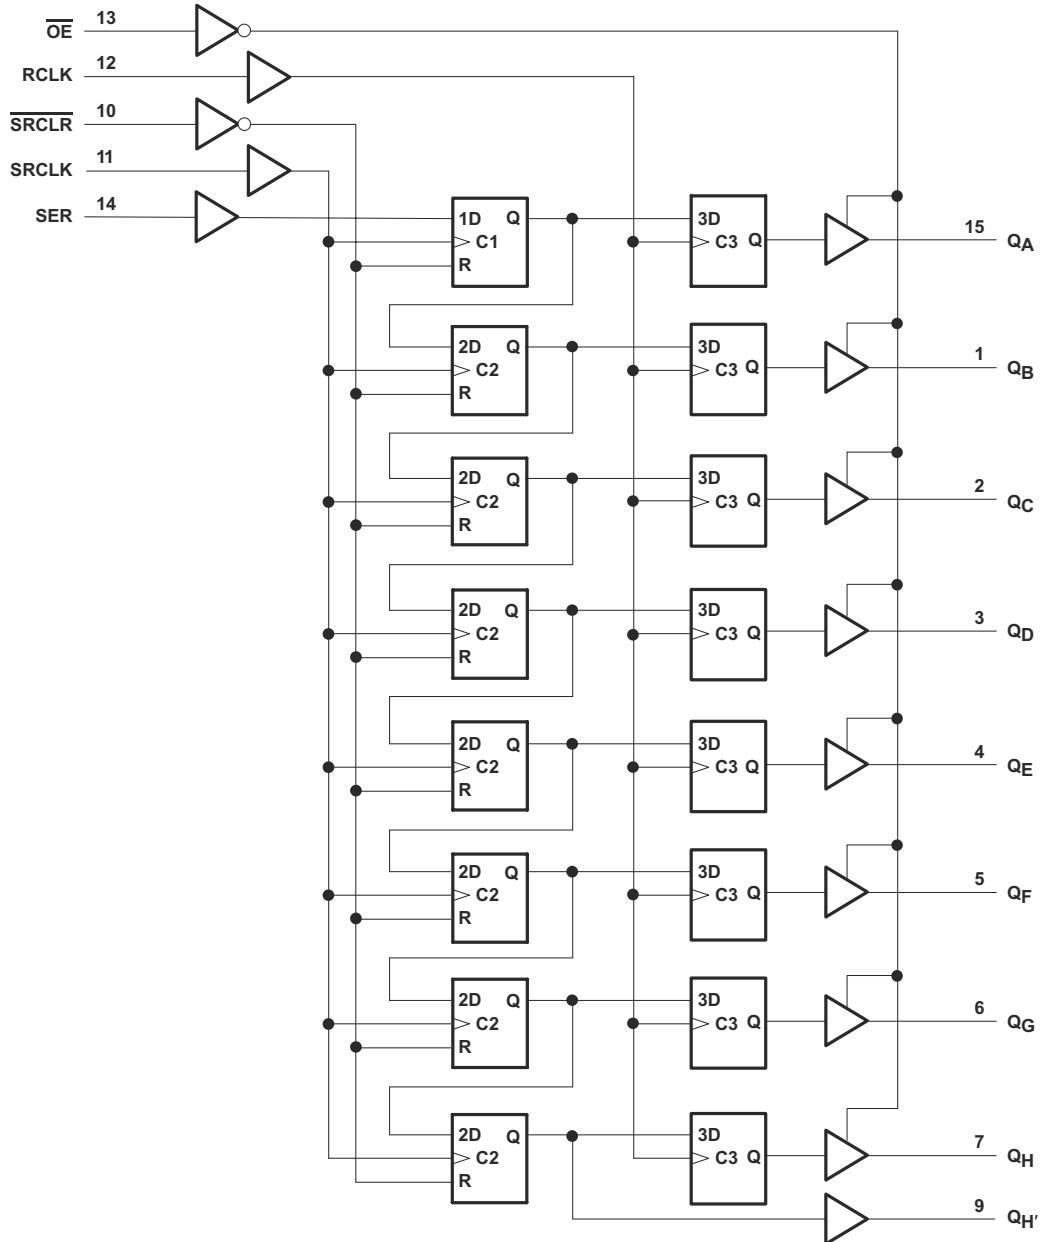

## 7.3 Feature Description

The SN74AHC595 device is an 8-bit serial-in, parallel-out shift registers that have a wide operating voltage range from 2 V to 5.5 V and a low current consumption of 40- $\mu$ A (max)  $I_{CC}$ .

## 7.4 Device Functional Modes

**Table 7-1. Function Table**

INPUTS					FUNCTION
SER	SRCLK	SRCLR	RCLK	OE	
X	X	X	X	H	Outputs $Q_A$ – $Q_H$ are disabled.
X	X	X	X	L	Outputs $Q_A$ – $Q_H$ are enabled.
X	X	L	X	X	Shift register is cleared.
L	↑	H	X	X	First stage of the shift register goes low. Other stages store the data of previous stage, respectively.
H	↑	H	X	X	First stage of the shift register goes high. Other stages store the data of previous stage, respectively.
X	X	X	↑	X	Shift-register data is stored into the storage register.

## 8 Application and Implementation


### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The SN74AHC595 device is a low-drive CMOS device that can be used for a multitude of bus-interface type applications where output ringing is a concern. The low drive and slow edge rates minimize overshoot and undershoot on the outputs. [Figure 8-1](#) shows an application where eight LEDs are used to visualize the data bits contained within the shift register.

### 8.2 Typical Application

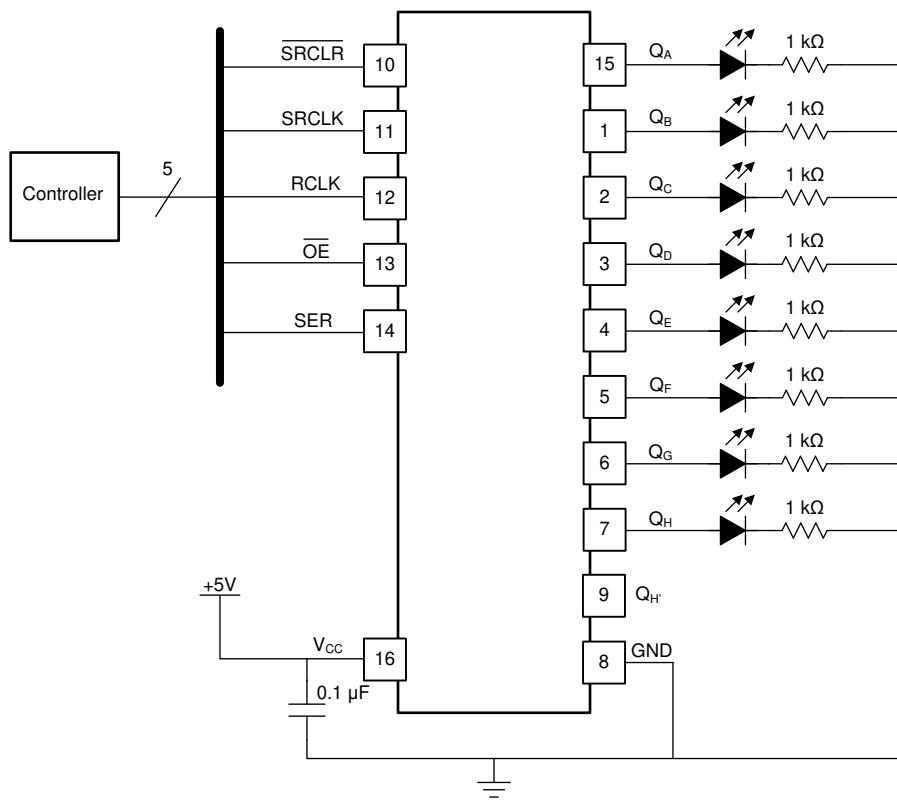

**Figure 8-1. Shift Register Display of 8 bits**

#### 8.2.1 Design Requirements


This device uses CMOS technology and has balanced output drive. Care must be taken to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads, so routing and load conditions must be considered to prevent ringing.

#### 8.2.2 Detailed Design Procedure

- Recommended input conditions:
  - Specified high and low levels. See ( $V_{IH}$  and  $V_{IL}$ ) in the [Recommended Operating Conditions](#) table.
  - Specified high and low levels. See ( $V_{IH}$  and  $V_{IL}$ ) in the [Recommended Operating Conditions](#) table.
  - Inputs are overvoltage tolerant allowing them to go as high as 6.0 V at any valid  $V_{CC}$

- Recommend output conditions:
  - Load currents must not exceed 25 mA per output and 75 mA total for the part
  - Outputs must not be pulled above  $V_{CC}$

### 8.2.3 Application Curve

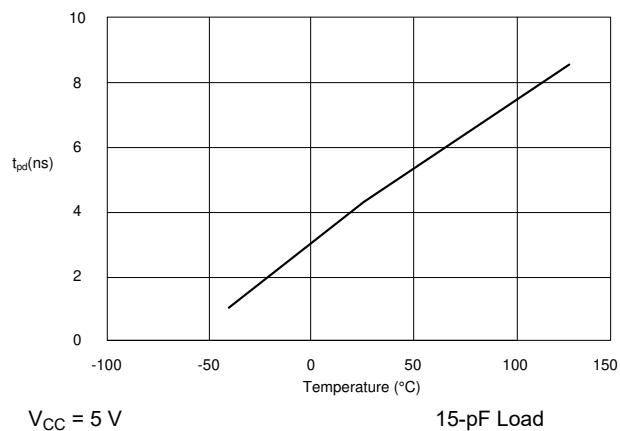

**Figure 8-2. SN74AHC595 RCLK to Q TPD vs Temperature**

## 8.3 Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply-voltage rating located in the *Recommended Operating Conditions* table.

Each  $V_{CC}$  pin must have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1- $\mu$ F capacitor is recommended; if there are multiple  $V_{CC}$  pins, then a 0.01- $\mu$ F or a 0.022- $\mu$ F capacitor is recommended for each power pin. It is acceptable to parallel multiple bypass capacitors to reject different frequencies of noise. A 0.1- $\mu$ F and a 1- $\mu$ F capacitor are commonly used in parallel. The bypass capacitor must be installed as close to the power pin as possible for best results.

## 8.4 Layout

### 8.4.1 Layout Guidelines

When using multiple-bit logic devices, inputs must never float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins must **not** be left unconnected because the undefined voltages at the outside connections results in undefined operational states. [Figure 8-3](#) specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, these unused inputs will be tied to GND or  $V_{CC}$ , whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver. If the transceiver has an output-enable pin, it will disable the output section of the part when asserted. This will not disable the input section of the I/Os, so they cannot float when disabled.

### 8.4.2 Layout Example

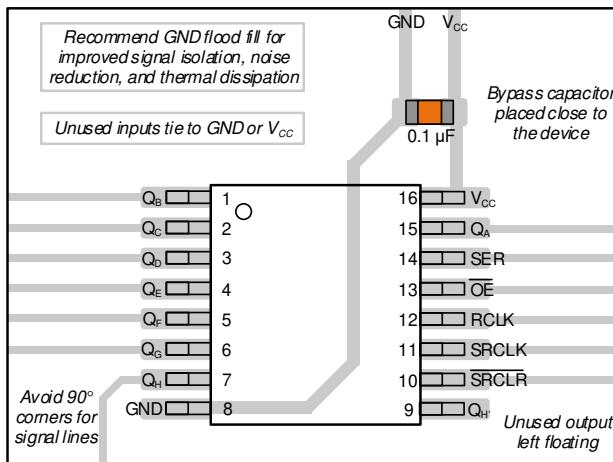


Figure 8-3. Example Layout for the SN74AHC595

## 9 Device and Documentation Support

### 9.1 Documentation Support

#### 9.1.1 Related Documentation

For related documentation, see the following:

*Implications of Slow or Floating CMOS Inputs*, [SCBA004](#)

### 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 9.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision M (April 2024) to Revision N (July 2024)	Page
• Updated R <sub>θJA</sub> value: D = 73 to 93.8, all values in °C/W .....	6

Changes from Revision L (March 2024) to Revision M (April 2024)	Page
• Updated thermal values for PW package from R <sub>θJA</sub> = 106.1 to 135.9, R <sub>θJC</sub> (top) = 40.8 to 70.3, R <sub>θJB</sub> = 51.1 to 81.3, Ψ <sub>JT</sub> = 3.8 to 22.5, Ψ <sub>JB</sub> = 50.6 to 80.8, all values in °C/W.....	6
• Added <i>Typical Characteristics</i> .....	12
• Updated <i>Layout Example</i> .....	18

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">SN74AHC595BQBR</a>	Active	Production	WQFN (BQB)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHC595
SN74AHC595BQBR.A	Active	Production	WQFN (BQB)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHC595
<a href="#">SN74AHC595D</a>	Obsolete	Production	SOIC (D)   16	-	-	Call TI	Call TI	-40 to 125	AHC595
<a href="#">SN74AHC595DBR</a>	Active	Production	SSOP (DB)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595
SN74AHC595DBR.A	Active	Production	SSOP (DB)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595
<a href="#">SN74AHC595DR</a>	Active	Production	SOIC (D)   16	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHC595
SN74AHC595DR.A	Active	Production	SOIC (D)   16	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHC595
<a href="#">SN74AHC595N</a>	Active	Production	PDIP (N)   16	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 125	SN74AHC595N
SN74AHC595N.A	Active	Production	PDIP (N)   16	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 125	SN74AHC595N
<a href="#">SN74AHC595PW</a>	Obsolete	Production	TSSOP (PW)   16	-	-	Call TI	Call TI	-40 to 125	HA595
<a href="#">SN74AHC595PWR</a>	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	HA595
SN74AHC595PWR.A	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595
SN74AHC595PWR.B	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	-	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595
<a href="#">SN74AHC595PWRG4</a>	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595
SN74AHC595PWRG4.A	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HA595

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

---

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN74AHC595 :**


- Automotive : [SN74AHC595-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

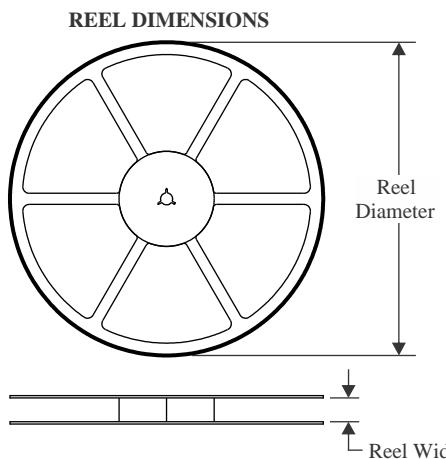
**TAPE AND REEL INFORMATION**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

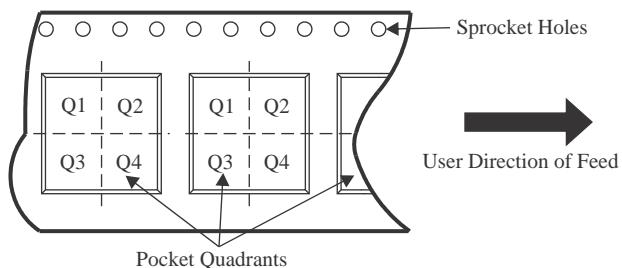**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


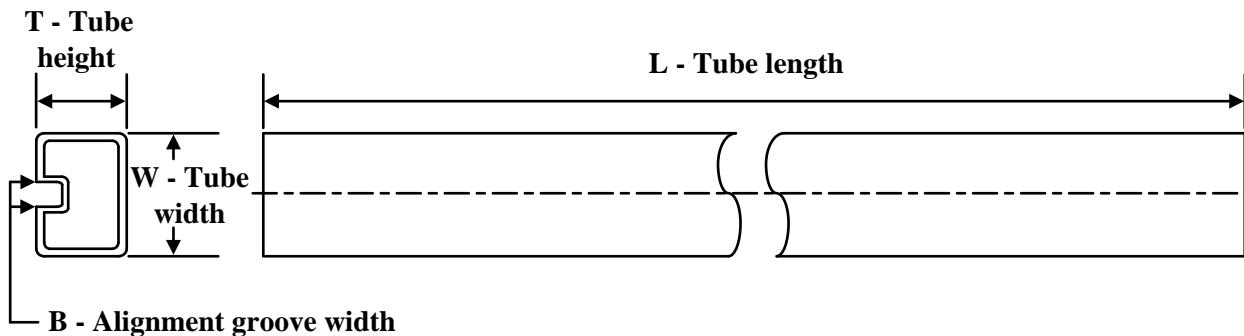
\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHC595BQBR	WQFN	BQB	16	3000	180.0	12.4	2.8	3.8	1.2	4.0	12.0	Q1
SN74AHC595DBR	SSOP	DB	16	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
SN74AHC595DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74AHC595PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AHC595PWRG4	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AHC595PWRG4	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

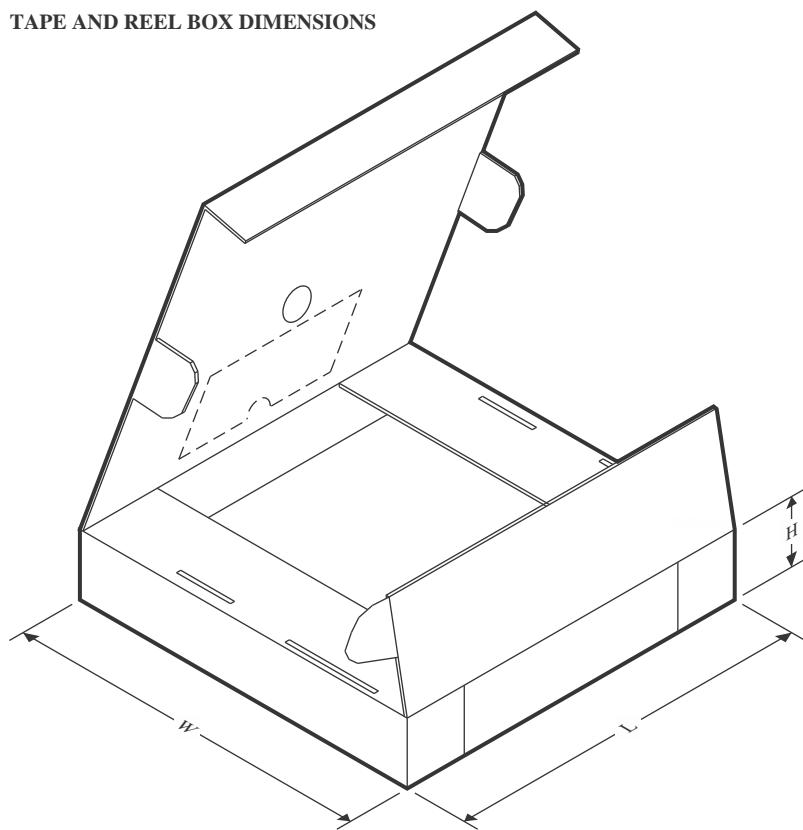**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHC595BQBR	WQFN	BQB	16	3000	210.0	185.0	35.0
SN74AHC595DBR	SSOP	DB	16	2000	353.0	353.0	32.0
SN74AHC595DR	SOIC	D	16	2500	353.0	353.0	32.0
SN74AHC595PWR	TSSOP	PW	16	2000	356.0	356.0	35.0
SN74AHC595PWRG4	TSSOP	PW	16	2000	353.0	353.0	32.0
SN74AHC595PWRG4	TSSOP	PW	16	2000	353.0	353.0	32.0


**TUBE**


\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T ( $\mu$ m)	B (mm)
SN74AHC595N	N	PDIP	16	25	506	13.97	11230	4.32
SN74AHC595N	N	PDIP	16	25	506	13.97	11230	4.32
SN74AHC595N.A	N	PDIP	16	25	506	13.97	11230	4.32
SN74AHC595N.A	N	PDIP	16	25	506	13.97	11230	4.32

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

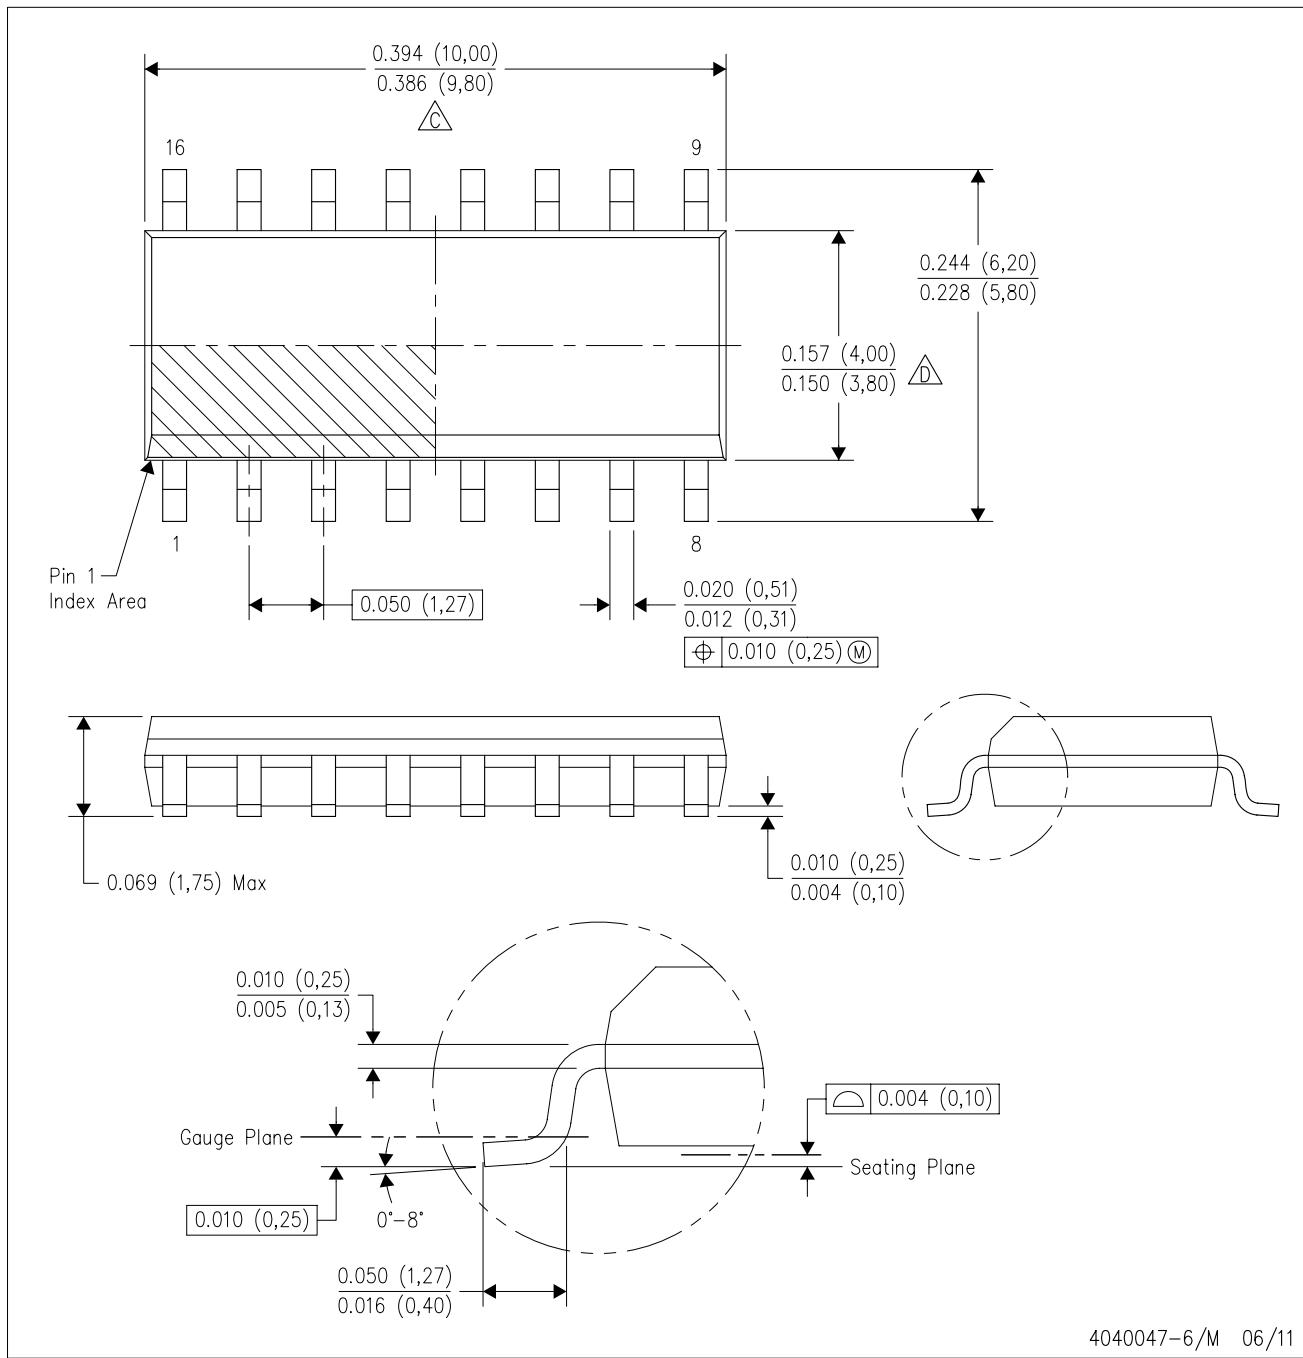

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.

D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.

E. Reference JEDEC MS-012 variation AC.


# PACKAGE OUTLINE

DB0016A



SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

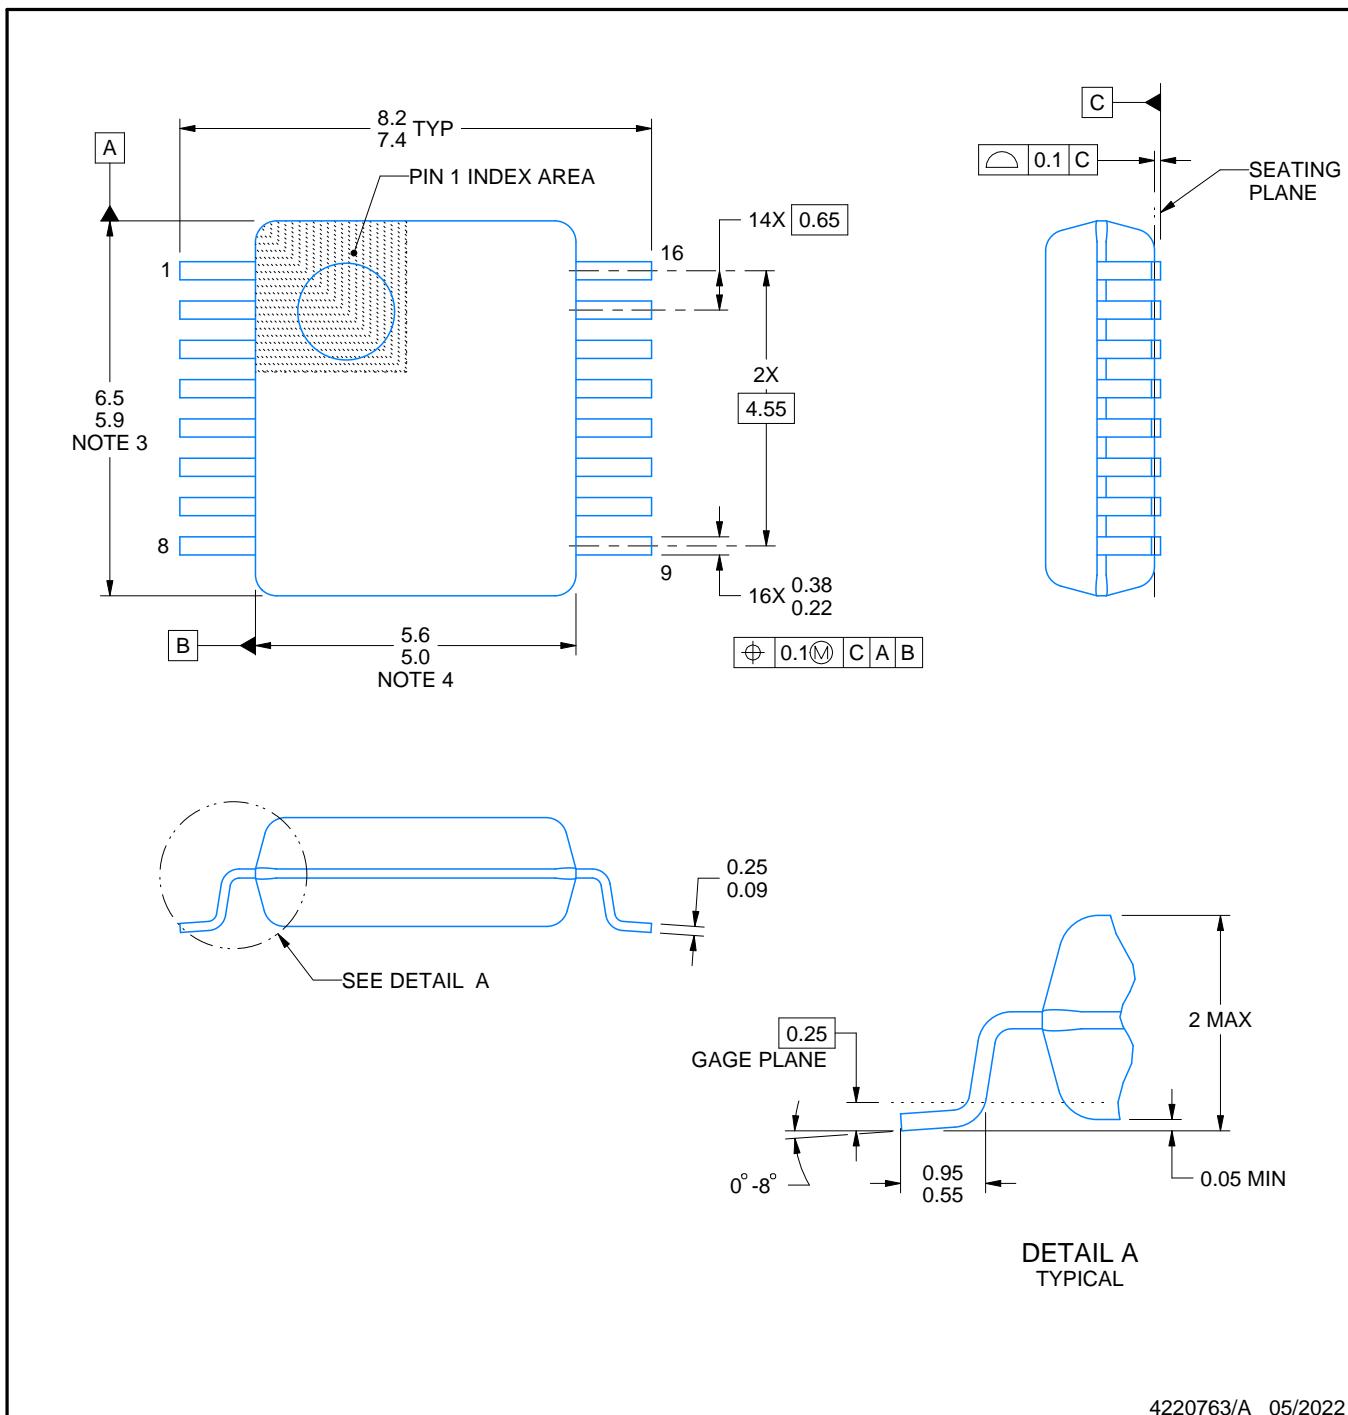

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-150.

# EXAMPLE BOARD LAYOUT


DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

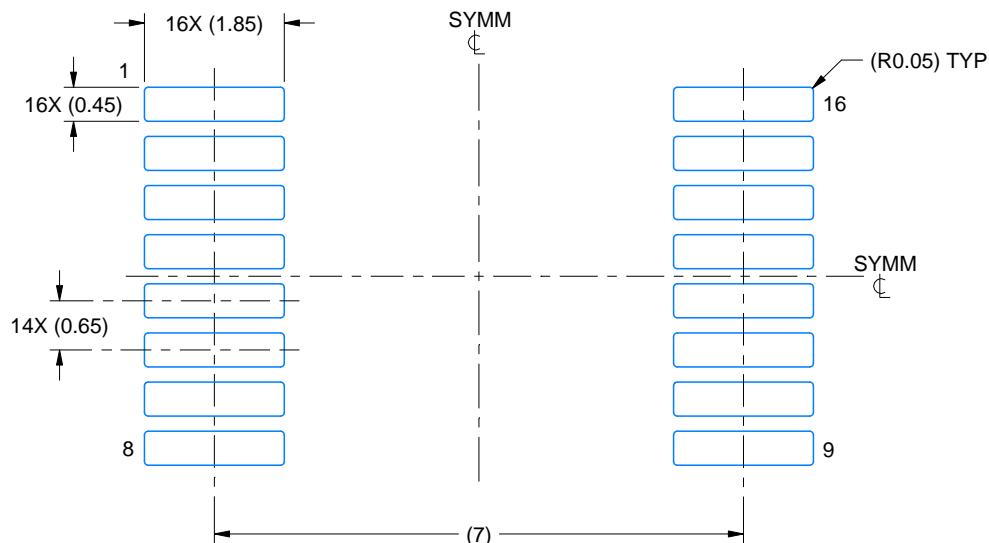

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

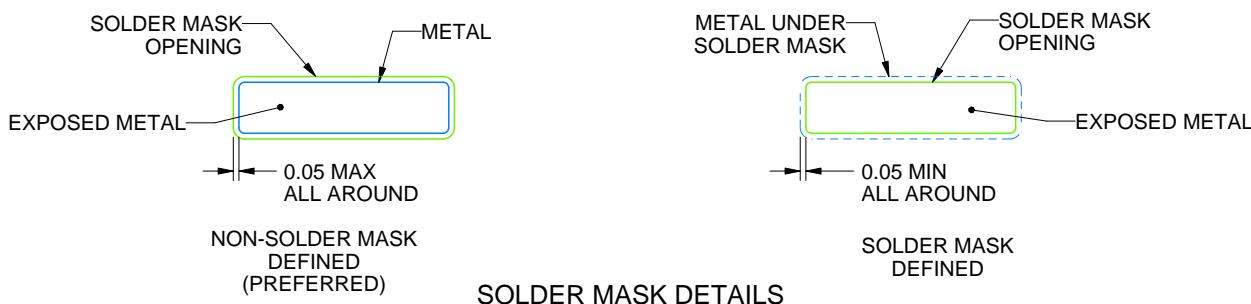

SOLDER MASK DETAILS

4220763/A 05/2022

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

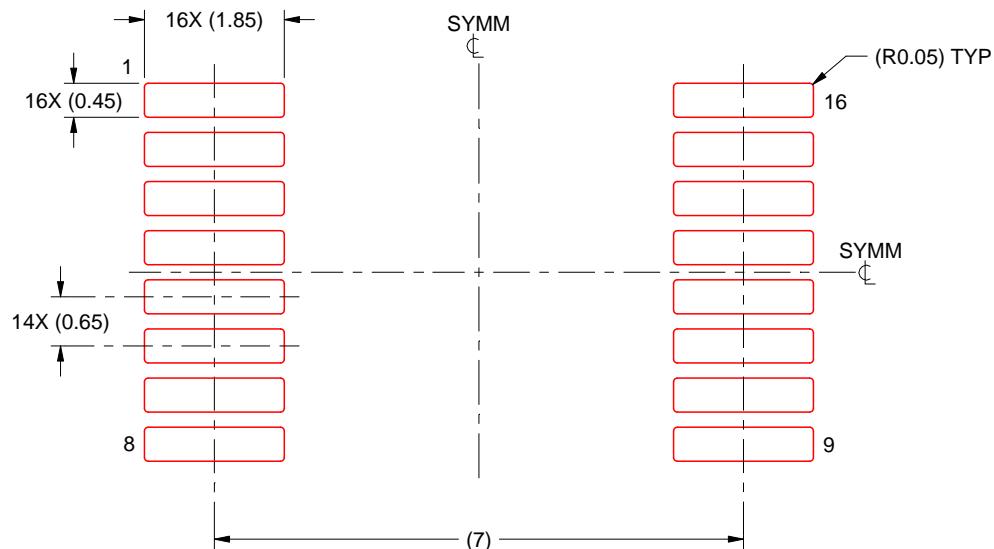

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220763/A 05/2022

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


### BQB 16

### WQFN - 0.8 mm max height

2.5 x 3.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

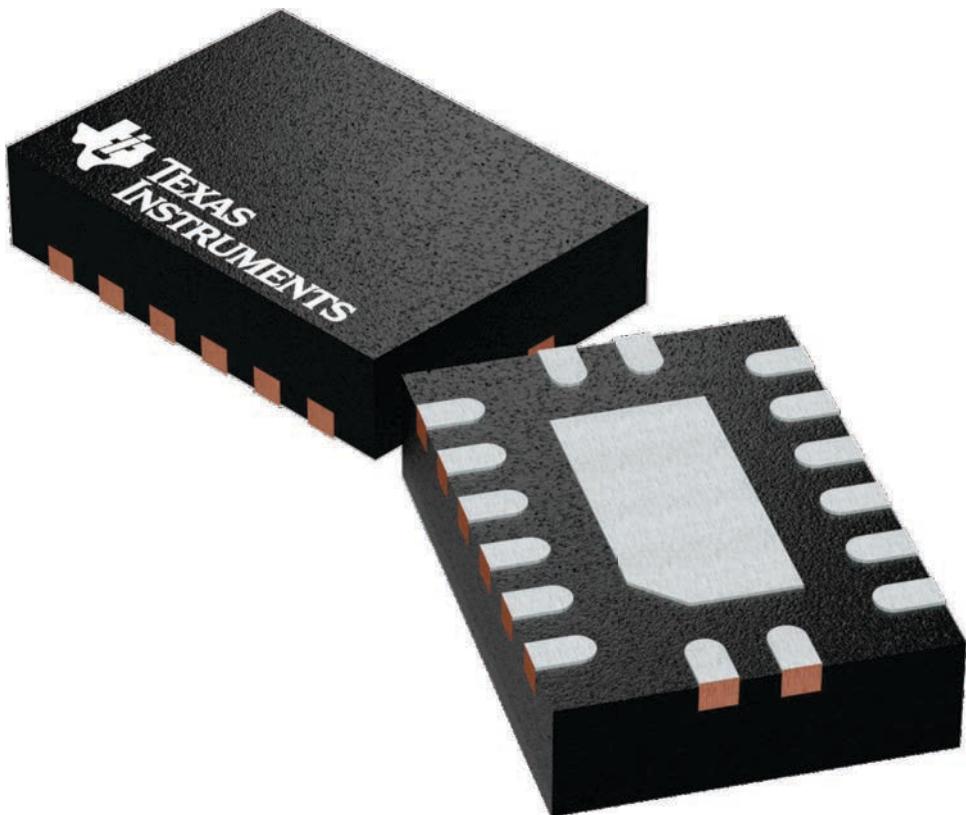


4226161/A

## PACKAGE OUTLINE

## WQFN - 0.8 mm max height

## PLASTIC QUAD FLAT PACK-NO LEAD

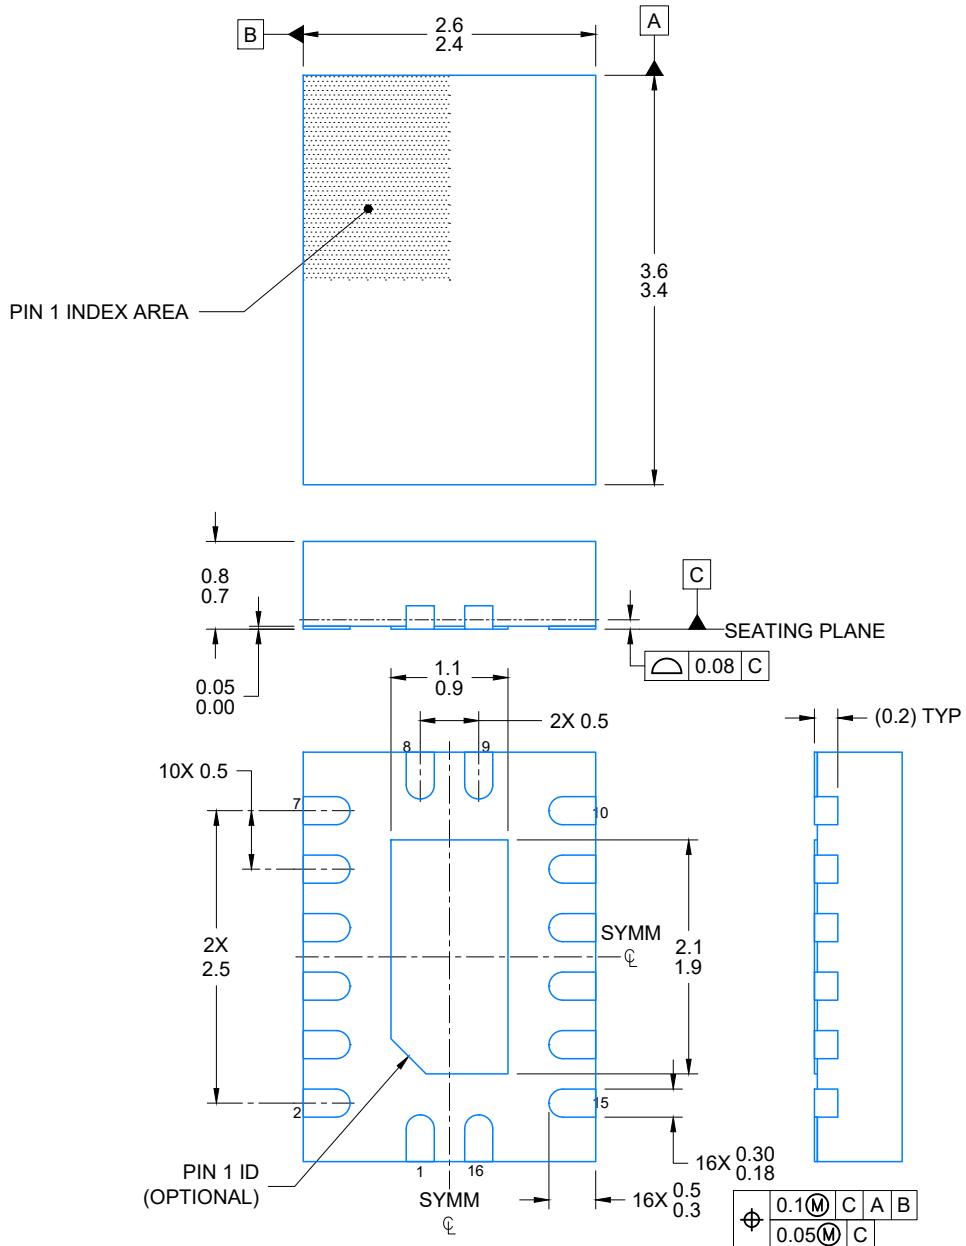

4224640/A 11/2018

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT

BQB0016A

WQFN - 0.8 mm max height


PLASTIC QUAD FLAT PACK-NO LEAD

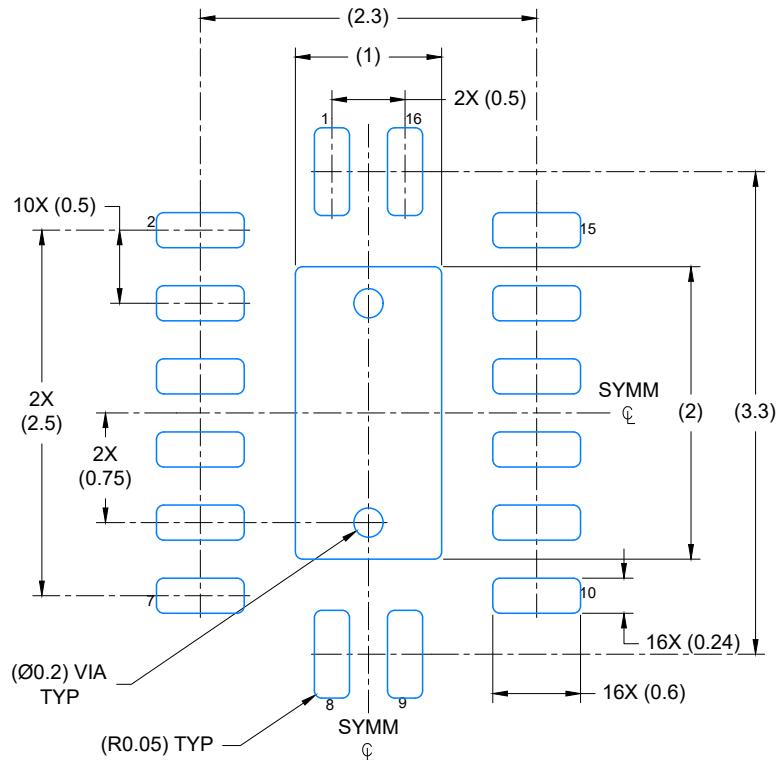

## LAND PATTERN EXAMPLE

EXPOSED METAL SHOWN

SCALE: 20X

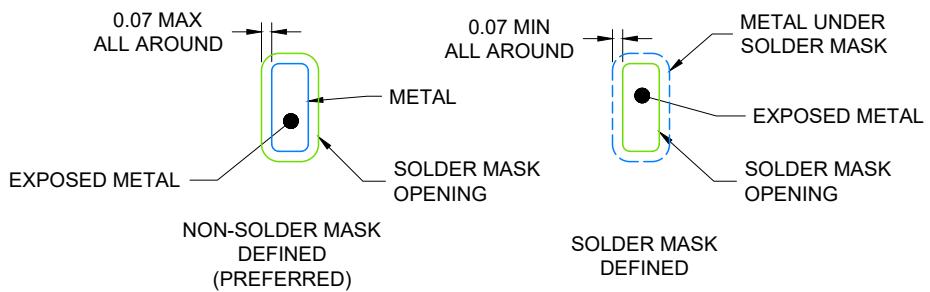

4224640/A 11/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

## EXAMPLE STENCIL DESIGN

**BQB0016A**

## WQFN - 0.8 mm max height

## PLASTIC QUAD FLAT PACK-NO LEAD

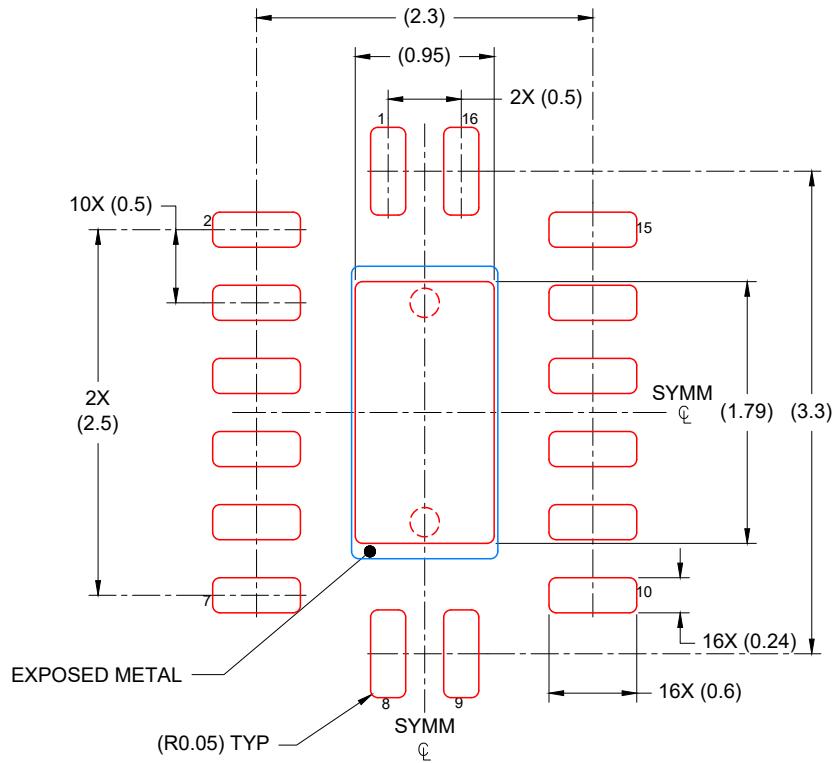

## SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
85% PRINTED COVERAGE BY AREA  
SCALE: 20X


4224640/A 11/2018

#### NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


## PACKAGE OUTLINE

**PW0016A**



## **TSSOP - 1.2 mm max height**

## SMALL OUTLINE PACKAGE

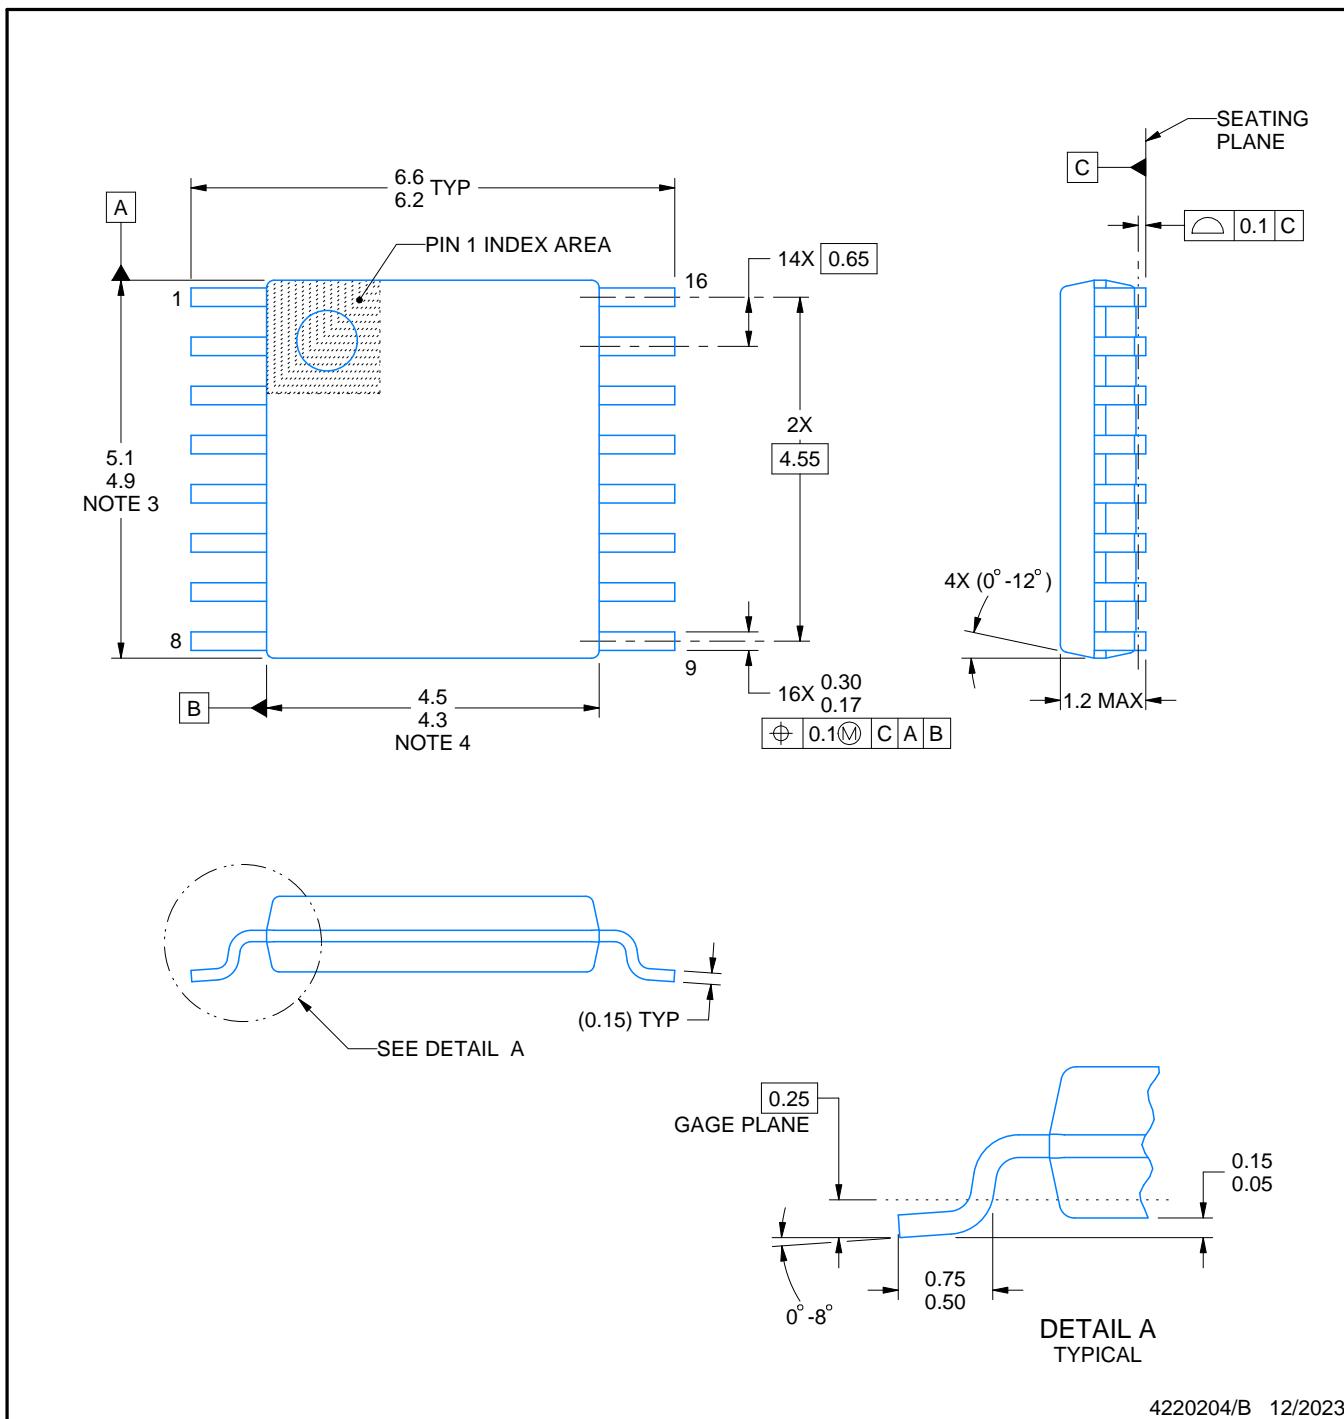

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

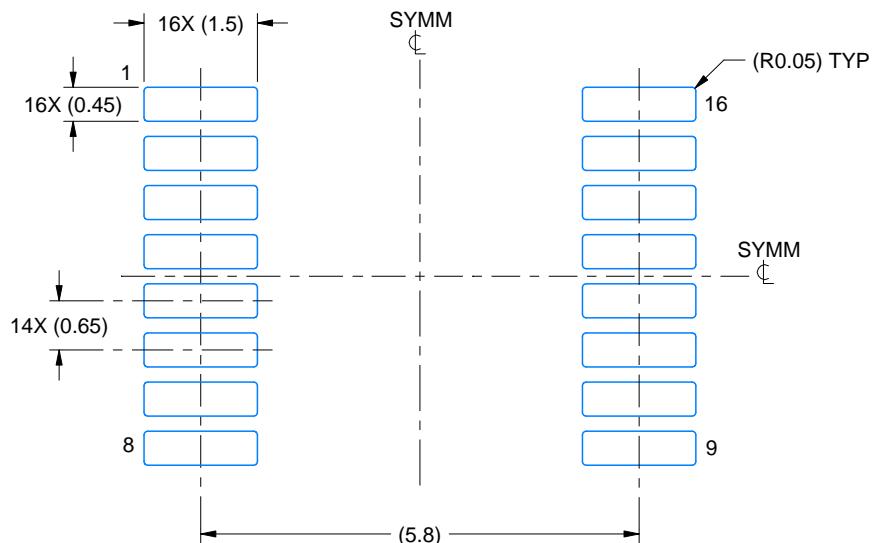

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

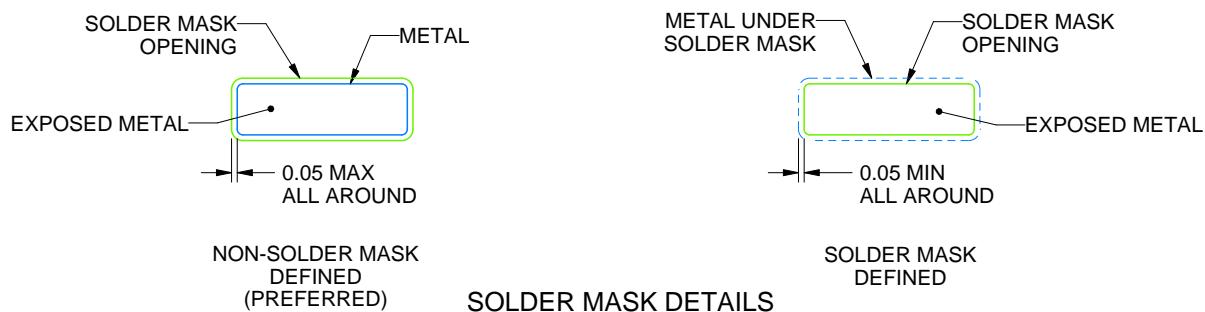

4220204/B 12/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

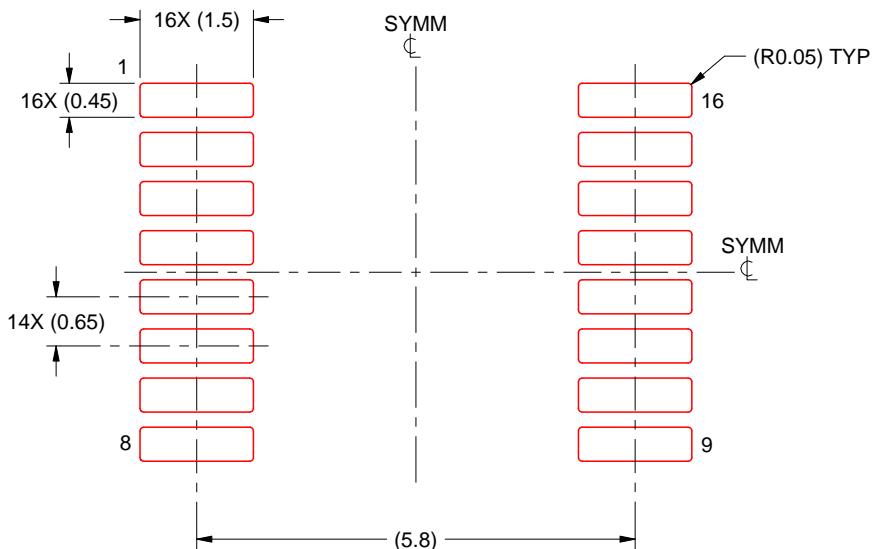

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220204/B 12/2023


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

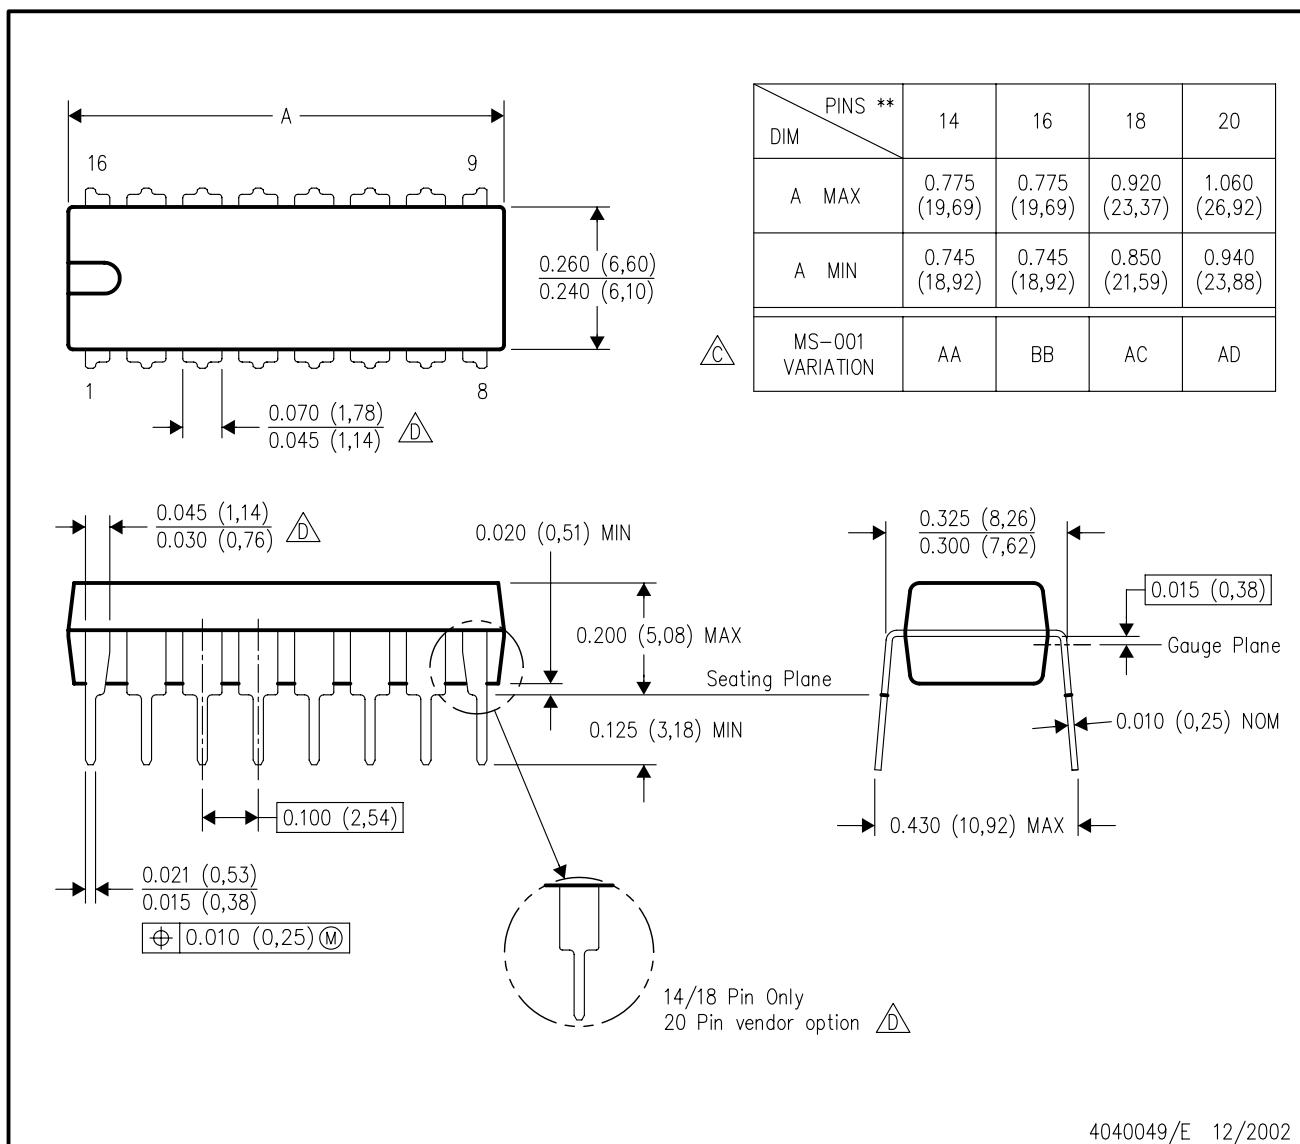

NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.

△ Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).

△ The 20 pin end lead shoulder width is a vendor option, either half or full width.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated