


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	REV. DCN 32243	11/29/04	STW
B	REV. DCN 35434	10/05/07	STW

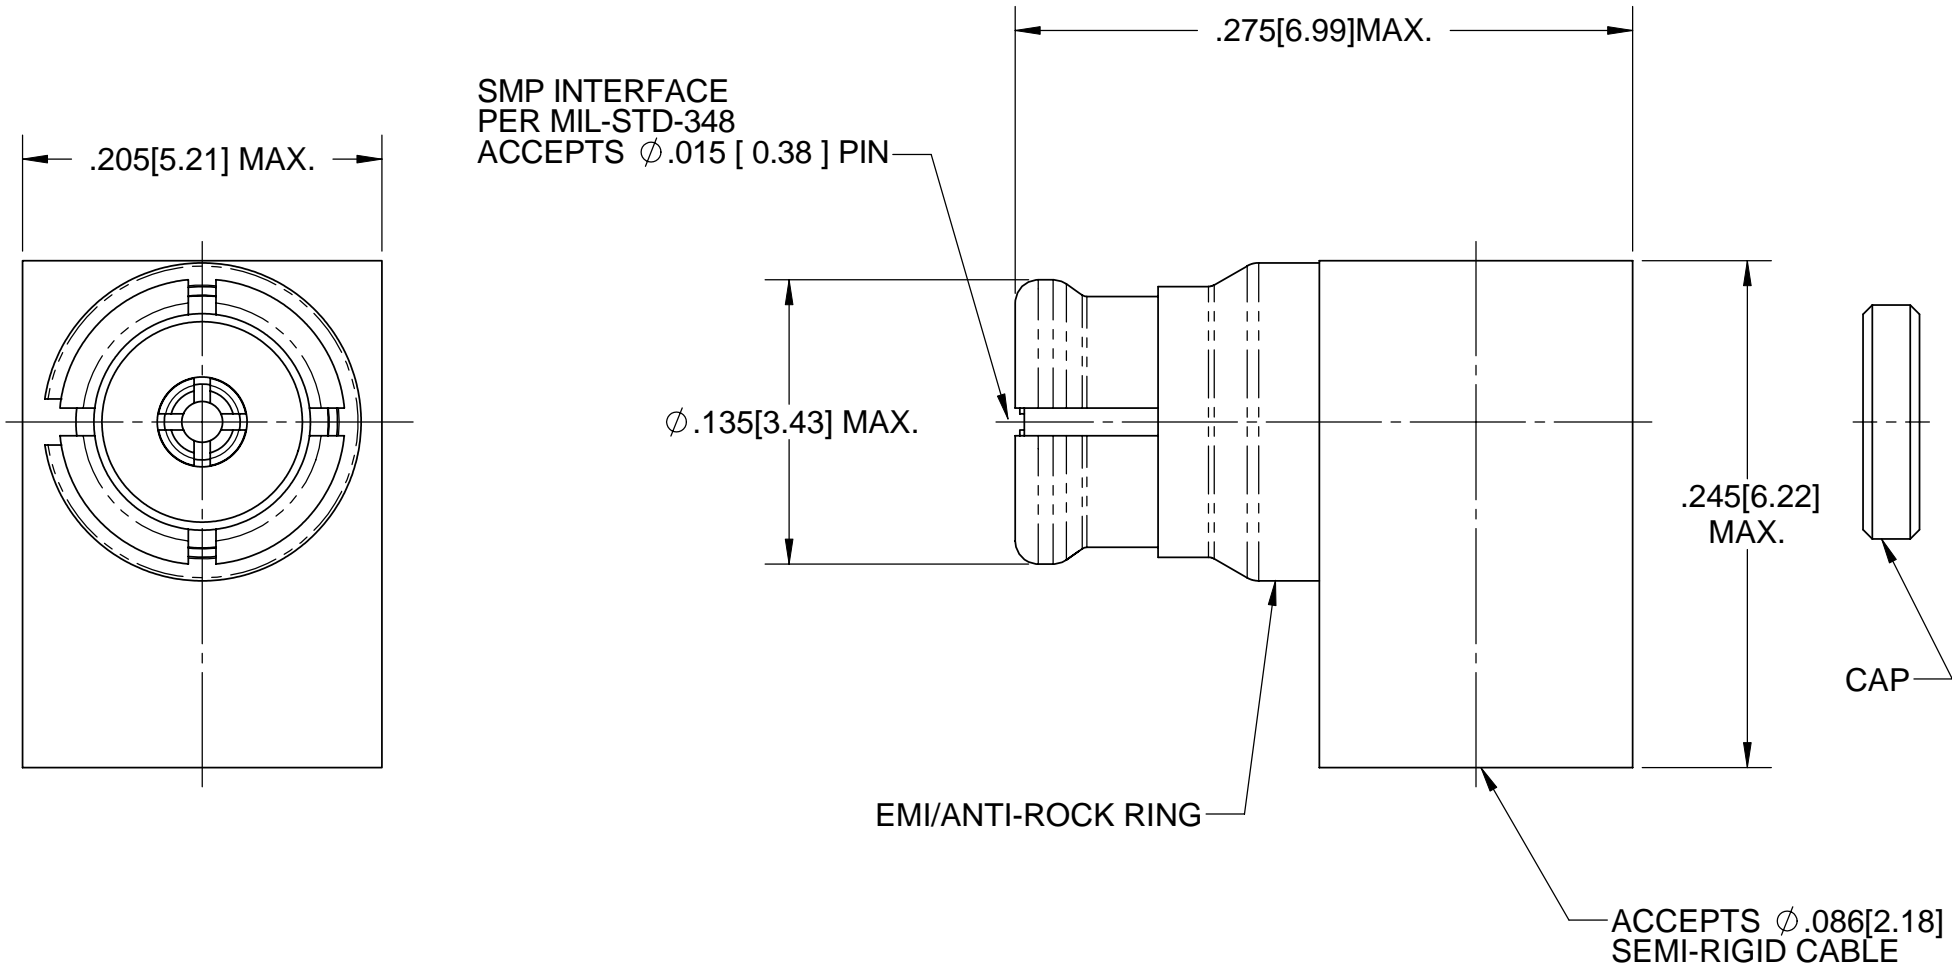

MATERIALS;
BODY, CONTACT,
EMI-RING, CAP &
ANTI-ROCK RING: BERYLLIUM COPPER PER ASTM B196
INSULATOR: PTFE PER ASTM D1710

FINISHES:
BODY, CONTACT,
EMI-RING, CAP &
ANTI-ROCK RING: GOLD PER ASTM B488, TYPE II
GRADE C, CLASS 1.27, OVER NICKEL
PER AMS-QQ-N-290, CLASS 1

ELECTRICAL:
IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 26.5 GHZ
D.W.V.: 500 VOLTS DC
INSULATION RES.: 5,000 MEGOHMS MINIMUM

REF. DSCC 94008ZCG-3

DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS IN BRACKETS [].

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0"
-----------	-----------	---