

**RoHS**  **C-III Varistor Series**


### Description

The C-III Series of Metal-Oxide Varistors (MOVs) are specifically designed for applications requiring high surge energy absorption ratings and superior multiple pulse absorption rating. This is achieved through a special dielectric material formulation which also results in higher repetitive surge ratings than other MOV types.

The C-III Series is primarily intended for use in AC line Transient Voltage Surge Suppressor (TVSS) product environment and other similar applications requiring high transient energy and peak current capability in a relatively small package size.

### Agency Approvals

Agency	Agency File Number
	E75961
	LR91788
	116895E
	42201-006

### Features

- Lead-free and RoHS compliant option available. Please see the device and ratings specifications table for more information
- High energy absorption capability  $W_{\text{TM}}$  40J to 530J (2ms)
- High pulse life rating
- High peak pulse current capability  $I_{\text{TM}}$  3500A to 9000A (8/20 $\mu$ s)
- Wide operating voltage range  $V_{\text{MIA}CIRMS}$  130V to 680V
- Available in tape and reel for automatic insertion; Also available with crimped and/or trimmed lead styles
- No derating up to 85°C ambient
- The C-III Series is supplied in 10mm, 14mm and 20mm disc versions with various lead options

### Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

Continuous	C-III Series	Units
Steady State Applied Voltage:		
DC Voltage Range ( $V_{\text{MIA}CIRMS}$ )	130 to 660	V
Transients:		
Single-Pulse Peak Current ( $I_{\text{TM}}$ ) 8/20 $\mu$ s Wave (See Peak Pulse Current Test Waveform)	3500 to 9000	A
Single-Pulse Energy Range ( $W_{\text{TM}}$ ) 2ms Rectangular Wave	40 to 530	J
Operating Ambient Temperature Range ( $T_A$ )	-55 to +85	°C
Storage Temperature Range ( $T_{\text{STG}}$ )	-55 to +125	°C
Temperature Coefficient ( $\alpha'$ ) of Clamping Voltage ( $V_c$ ) at Specified Test Current	<0.0	%/°C
Hi-Pot Encapsulation (COATING Isolation Voltage Capability)	5000	V
COATING Insulation Resistance	1000	MΩ

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**C-III Series Ratings**

Lead-free and RoHS Compliant Models		Standard Models		Maximum Ratings (85 °C)			
				Continuous Maximum V <sub>RMS</sub> V <sub>(MIAC)</sub> (V)	Withstanding Energy (2ms)W <sub>TM</sub> (J)	Transient	
Part Number	Branding	Part Number	Branding			I <sub>TM1</sub> 1 Pulse (A)	I <sub>TM2</sub> 2 Pulses (A)
V130LA5CP	P130L5C	V130LA5C	130L5C	130	40	3500	3000
V130LA10CP	P130L10C	V130LA10C	130L10C	130	80	6000	5000
V130LA20CP	P130L20C	V130LA20C	130L20C	130	200	9000	7000
V130LA20CPX325	P130X325	V130LA20CX325	130CX325	130	200	9000	7000
V140LA5CP	P140L5C	V140LA5C	140L5C	140	45	3500	3000
V140LA10CP	P140L10C	V140LA10C	140L10C	140	90	6000	5000
V140LA20CP	P140L20C	V140LA20C	140L20C	140	210	9000	7000
V140LA20CPX340	P140X340	V140LA20CX340	140CX340	140	210	9000	7000
V150LA5CP	P150L5C	V150LA5C	150L5C	150	50	3500	3000
V150LA10CP	P150L10C	V150LA10C	150L10C	150	100	6000	5000
V150LA20CP	P150L20C	V150LA20C	150L20C	150	215	9000	7000
V150LA20CPX360	P150X360	V150LA20CX360	150CX360	150	215	9000	7000
V175LA5CP	P175L5C	V175LA5C	175L5C	175	55	3500	3000
V175LA10CP	P175L10C	V175LA10C	175L10C	175	110	6000	5000
V175LA20CP	P175L20C	V175LA20C	175L20C	175	220	9000	7000
V175LA20CPX425	P175X425	V175LA20CX425	175CX425	175	220	9000	7000
V230LA10CP	P230L10C	V230LA10C	230L10C	230	60	3500	3000
V230LA20CP	P230L20C	V230LA20C	230L20C	230	125	6000	5000
V230LA40CP	P230L40C	V230LA40C	230L40C	230	280	9000	7000
V230LA40CPX570	P230X570	V230LA40CX570	230X570	230	280	9000	7000
V250LA10CP	P250L10C	V250LA10C	250L10C	250	65	3500	3000
V250LA20CP	P250L20C	V250LA20C	250L20C	250	135	6000	5000
V250LA40CP	P250L40C	V250LA40C	250L40C	250	300	9000	7000
V250LA40CPX620	P250X620	V250LA40CX620	250CX620	250	300	9000	7000
V275LA10CP	P275L10C	V275LA10C	275L10C	275	70	3500	3000
V275LA20CP	P275L20C	V275LA20C	275L20C	275	145	6000	5000
V275LA40CP	P275L40C	V275LA40C	275L40C	275	320	9000	7000
V275LA40CPX680	P275X680	V275LA40CX680	275CX680	275	320	9000	7000
V300LA10CP	P300L10C	V300LA10C	300L10C	300	75	3500	3000
V300LA20CP	P300L20C	V300LA20C	300L20C	300	155	6000	5000
V300LA40CP	P300L40C	V300LA40C	300L40C	300	335	9000	7000
V300LA40CPX745	P300X745	V300LA40CX745	300CX745	300	335	9000	7000
V320LA10CP	P320L10C	V320LA10C	320L10C	320	80	3500	3000
V320LA20CP	P320L20C	V320LA20C	320L20C	320	165	6000	5000
V320LA40CP	P320L40C	V320LA40C	320L40C	320	345	9000	7000
V320LA40CPX810	P320X810	V320LA40CX810	320CX810	320	345	9000	7000
V385LA20CP	P385L20C	V385LA20C	385L20C	385	175	6000	5000
V385LA40CP	P385L40C	V385LA40C	385L40C	385	370	9000	7000
V420LA20CP	P420L20C	V420LA20C	420L20C	420	185	6000	5000
V420LA40CP	P420L40C	V420LA40C	420L40C	420	390	9000	7000
V460LA10CP	V460L10C	V460LA10C	460L10C	460	95	3500	3000
V460LA20CP	V460L20C	V460LA20C	460L20C	460	190	6000	5000
V460LA40CP	P460L40C	V460LA40C	460L40C	460	430	9000	7000
V480LA80CP	P480L80C	V480LA80C	480L80C	480	420	9000	7000
V510LA80CP	P510L80C	V510LA80C	510L80C	510	440	9000	7000
V550LA80CP	P550L80C	V550LA80C	550L80C	550	450	9000	7000
V575LA80CP	P575L80C	V575LA80C	575L80C	575	460	9000	7000
V625LA80CP	P625L80C	V625LA80C	625L80C	625	490	9000	7000
V660LA80CP	P660L80C	V660LA80C	660L80C	660	510	9000	7000
V680LA100CP	P680L100C	V680LA100C	680L100C	680	520	9000	7000

### C-III Series Specifications

Lead-free And RoHS Compliant Models	Standard Models	Model Size Disc Diameter (mm)	Specifications (25 °C)					
			Varistor Voltage at 1mA DC Test Current		Maximum Clamping Voltage (8/20µs)	Duty Cycle Surge Rating		
Part Number	Part Number	V <sub>n</sub> Min (V)	V <sub>n</sub> Max (V)	V <sub>c</sub> (V)	I <sub>p</sub> (A)	3kA (8/20µs) # Pulses	750A (8/20µs) # Pulses	
V130LA5CP	V130LA5C	10	184	228	340	25	2	100
V130LA10CP	V130LA10C	14	184	228	340	50	40	600
V130LA20CP	V130LA20C	20	184	228	340	100	80	1600
V130LA20CPX325	V130LA20CX325	20	184	220	325	100	80	1600
V140LA5CP	V140LA5C	10	198	242	360	25	2	100
V140LA10CP	V140LA10C	14	198	242	360	50	40	600
V140LA20CP	V140LA20C	20	198	242	360	100	80	1600
V140LA20CPX340	V140LA20CX340	20	198	230	340	100	80	1600
V150LA5CP	V150LA5C	10	212	268	395	25	2	100
V150LA10CP	V150LA10C	14	212	268	395	50	40	600
V150LA20CP	V150LA20C	20	212	268	395	100	80	1600
V150LA20CPX360	V150LA20CX360	20	212	243	360	100	80	1600
V175LA5CP	V175LA5C	10	247	303	455	25	2	100
V175LA10CP	V175LA10C	14	247	303	455	50	40	600
V175LA20CP	V175LA20C	20	247	303	455	100	80	1600
V175LA20CPX425	V175LA20CX425	20	247	285	425	100	80	1600
V230LA10CP	V230LA10C	10	324	396	595	25	2	100
V230LA20CP	V230LA20C	14	324	396	595	50	40	600
V230LA40CP	V230LA40C	20	324	396	595	100	80	1600
V230LA40CPX570	V230LA40CX570	20	324	384	570	100	80	1600
V250LA10CP	V250LA10C	10	354	429	650	25	2	100
V250LA20CP	V250LA20C	14	354	429	650	50	40	600
V250LA40CP	V250LA40C	20	354	429	650	100	80	600
V250LA40CPX620	V250LA40CX620	20	354	413	620	100	80	1600
V275LA10CP	V275LA10C	10	389	473	710	25	2	100
V275LA20CP	V275LA20C	14	389	473	710	50	40	600
V275LA40CP	V275LA40C	20	389	473	710	100	80	1600
V275LA40CPX680	V275LA40CX680	20	389	453	680	100	80	1600
V300LA10CP	V300LA10C	10	420	517	775	25	2	100
V300LA20CP	V300LA20C	14	420	517	775	50	40	600
V300LA40CP	V300LA40C	20	420	517	775	100	80	1600
V300LA40CPX745	V300LA40CX745	20	420	490	745	100	80	1600
V320LA10CP	V320LA10C	10	462	565	850	25	2	100
V320LA20CP	V320LA20C	14	462	565	850	50	40	600
V320LA40CP	V320LA40C	20	462	565	850	100	80	1600
V320LA40CPX810	V320LA40CX810	20	462	540	810	100	80	1600
V385LA20CP	V385LA20C	14	558	682	1025	50	40	600
V385LA40CP	V385LA40C	20	558	682	1025	100	80	1600
V420LA20CP	V420LA20C	14	610	748	1120	50	40	600
V420LA40CP	V420LA40C	20	610	748	1120	100	80	1600
V460LA10CP	V460L10C	10	640	790	1190	25	2	100
V460LA20CP	V460L20C	14	640	790	1190	50	40	600
V460LA40CP	V460LA40C	20	640	790	1190	100	80	1600
V480LA80CP	V480LA80C	20	670	825	1240	100	80	1600
V510LA80CP	V510LA80C	20	735	910	1350	100	80	1600
V550LA80CP	V550LA80C	20	780	970	1435	100	80	1600
V575LA80CP	V575LA80C	20	805	1000	1500	100	80	1600
V625LA80CP	V625LA80C	20	900	1100	1725	100	80	1600
V660LA80CP	V660LA80C	20	940	1210	1820	100	80	1600
V680LA100CP	V680LA100C	20	990	1130	1700	100	80	1600

1 Average power dissipation of transients not to exceed 0.6W and 1W for model sizes 14mm and 20mm, respectively.

2 7mm parts also available-contact factory for further information

3 For additional or intermediary voltage ratings contact factory

©2009 Littelfuse, Inc.

Specifications are subject to change without notice.

Please refer to [www.littelfuse.com/series/c-iii.html](http://www.littelfuse.com/series/c-iii.html) for current information.



### Transient V-I Characteristics Curves (continued)

#### Maximum Clamping Voltage for 14mm Parts

V130LA10C(P) – V420LA20C(P)

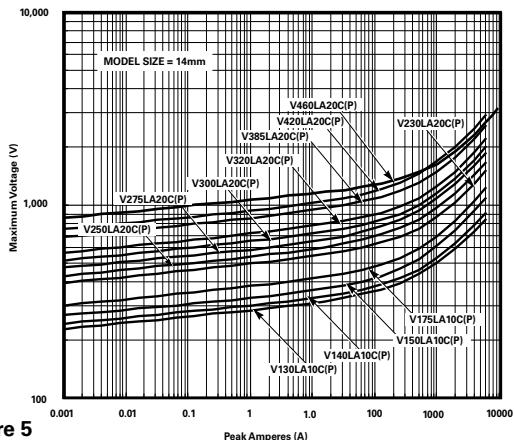


Figure 5

#### Pulse Rating Curves

#### Repetitive Surge Capability for 14mm Parts

V130LA10C(P)-V420LA20C(P)

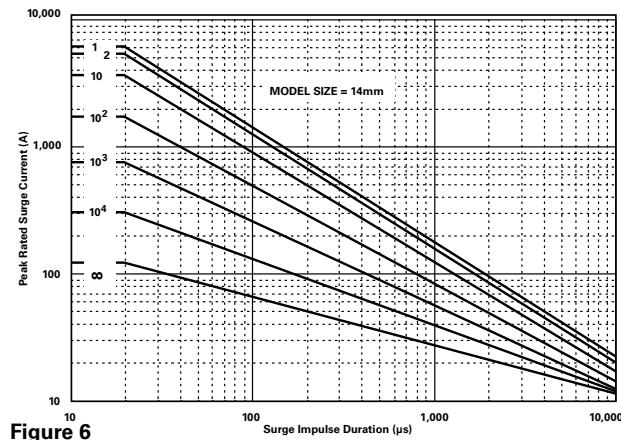


Figure 6

#### Maximum Clamping Voltage for 20mm Parts

V130LA5C(P) - V320LA10C (P)

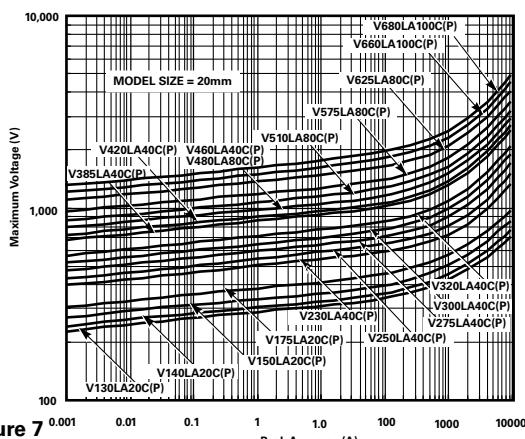


Figure 7

#### Repetitive Surge Capability for 20mm Parts

V130LA20C(P)-V680LA100C(P)

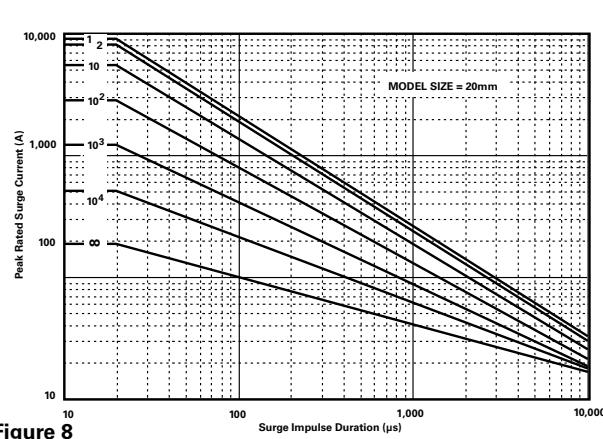


Figure 8

#### Maximum Clamping Voltage for Low Clamping Voltage Parts

V130LA20CX325(P) - V300LA40CX245 (P)


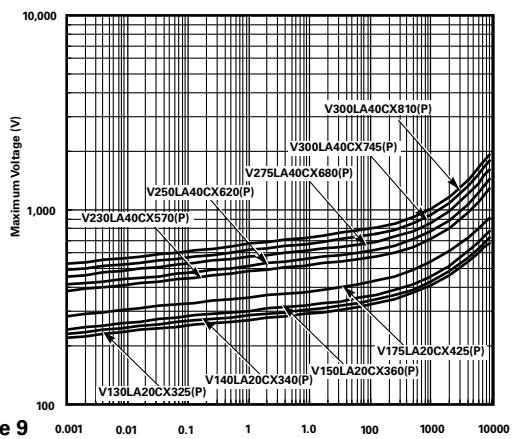



Figure 9

## Wave Solder Profile

### Non Lead-free Profile

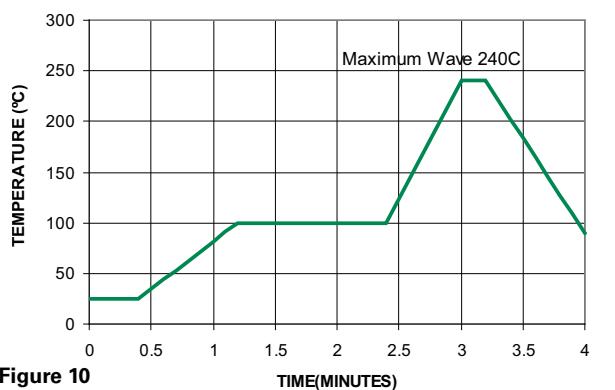

### Lead-free Profile

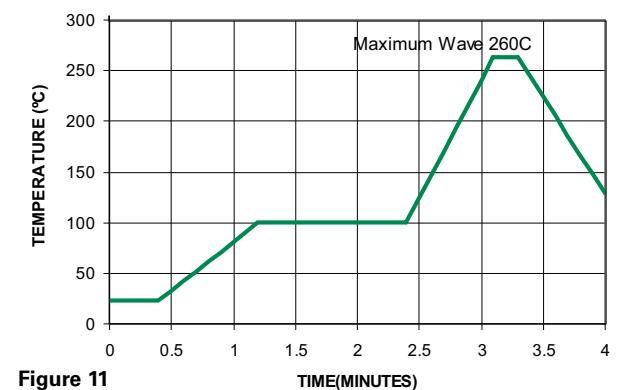

## Physical Specifications

<b>Lead Material</b>	Tin-Coated Copper Wire
<b>Soldering Characteristics</b>	Solderability per MIL-STD-202, Method 208E
<b>Insulating Material</b>	Cured, flame retardant epoxy polymer meets UL94V-0 requirements
<b>Device Labeling</b>	Marked with LF, voltage, UL/CSA Logos, and date code

## Environmental Specifications

<b>Operating/Storage Temperature</b>	-55°C to +85°C/-55°C to +125°C
<b>Humidity Aging</b>	+85°C, 85% RH, 1000 hours +/-10% typical voltage change
	+85°C to -40°C 10 times +/-10% typical voltage change
<b>Solvent Resistance</b>	MIL-STD-202, Method 215F
<b>Moisture Sensitivity</b>	Level 1, J-STD-020C

## C-III Series Varistors for Hi-Temperature Operating Conditions:

- Phenolic Coated CIII Series devices are available with improved maximum operating maximum temperature 125°C
- These devices also have improved temperature cycling performance capability.
- Ratings and Specifications are as per standard CIII Series except Hi-Pot Encapsulation (Isolation Voltage Capability)=500V.
- To order: add X1347 to part number (e.g. V230LA40CX1347)
- These devices are not UL, CSA, VDE or CECC certified.
- Contact factory for further details.

### AC Bias Reliability

The C-III Series MOVs were designed for use on the AC line. The varistor is connected across the AC line and is biased with a constant amplitude sinusoidal voltage. It should be noted that the definition of failure is a shift in the nominal varistor voltage ( $V_N$ ) exceeding +/-10%. Although this type of varistor is still functioning normally after this magnitude of shift, devices at the lower extremities of  $V_N$  tolerance will begin to dissipate more power.

Because of this possibility, an extensive series of statistically designed tests were performed to determine the reliability of the C-III type of varistor under AC bias combined with high levels of temperature stress. To date, this test has generated over 50,000 device hours of operation at a temperature of 125°C, although only rated at 85°C. Changes in the nominal varistor voltage, measured at 1mA, of less than 2% have been recorded, as displayed in the diagram at right.

### Transient Surge Current/Energy Transient Capability

The transient surge rating serves as an excellent figure of merit for the C-III varistor. This inherent surge handling capability is one of the C-III varistor's best features. The enhanced surge absorption capability results from improved process uniformity and enhanced construction. The homogeneity of the raw material powder and improved control over the sintering and assembly processes are contributing factors to this improvement.

In the low power AC mains environment, industry standards (UL, IEC, NEMA and IEEE) all suggest that the worst case surge occurrence will be 3kA. Such a transient event may occur up to five times over the equipment life time (approximately 10 years). While the occurrences of five 3kA transients is the required capability, the rated, repetitive surge current for the C-III Series is 80 pulses for the 20mm units and 40 pulses for the 14mm Series.

As a measure of the inherent device capability, samples of the 20mm V130LA20C devices were subjected to a worst case repetitive transient surges test. After 100 pulses, each of 3kA, there was negligible change in the device characteristics. Changes in the clamping voltage, measured at 100A, of less than 3% were recorded, as shown in the upper diagram at right.

Samples of the 14mm Series V175LA20C were subjected to repetitive surge occurrences of 750A. Again, there was negligible changes in any of the device characteristics after 2000 pulses, as shown in the lower diagram at right.

In both cases the inherent device capability is far in excess of the expected worst case scenario.

### High Temperature Operating Life 125°C for 1000 Hours at Rated Bias

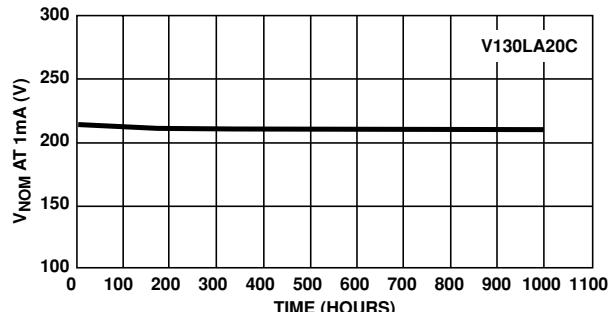


Figure 12

### Typical Repetitive Surge Current Capability of C-III Series MOVs

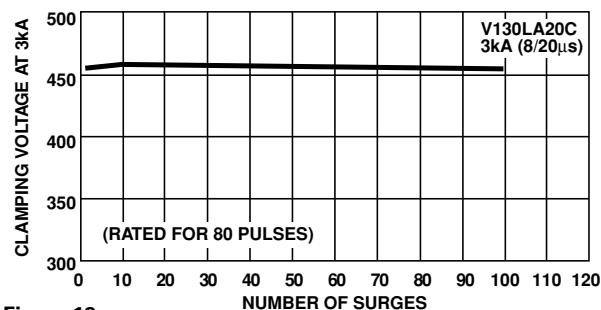


Figure 13


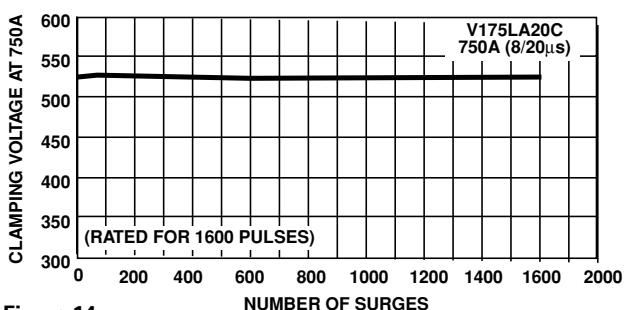


Figure 14

**Product Dimensions (mm)**

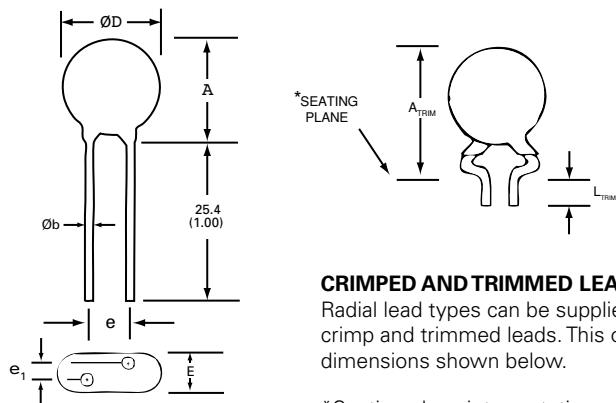

**CRIMPED AND TRIMMED LEADS**

Radial lead types can be supplied with combination preformed crimp and trimmed leads. This option is supplied to the dimensions shown below.

\*Seating plane interpretation per IEC-60717

Dimension	V <sub>RMS</sub> Voltage Model	10mm Size		14mm Size		20mm Size	
		Min.	Max.	Min.	Max.	Min.	Max.
<b>A</b>	All	12.0 (0.472)	16.0 (0.630)	13.5 (0.531)	20.0 (0.787)	17.5 (0.689)	28.0 (1.102)
<b>ØD</b>	All	10.0 (0.394)	12.5 (0.492)	13.5 (0.531)	17.0 (0.669)	17.5 (0.689)	23.0 (0.906)
<b>e</b>	All	6.5 (0.256)	8.5 (0.335)	6.5 (0.256)	8.5 (0.335)	6.5 (0.256)	8.5 (0.335)
<b>e<sub>1</sub></b>	130 - 320	2.5 (0.098)	5.5 (0.216)	2.5 (0.098)	5.5 (0.216)	2.5 (0.098)	5.5 (0.216)
	>320			4.5 (0.177)	9.0 (0.354)	4.5 (0.177)	9.0 (0.354)
<b>E</b>	130 - 320	-	7.3 (0.287)	-	7.3 (0.287)	-	7.3 (0.287)
	>320				11.0 (0.433)		11.0 (0.433)
<b>Øb</b>	130 - 320	0.76 (0.030)	0.86 (0.034)	0.76 (0.030)	0.86 (0.034)	0.76 (0.030)	0.86 (0.034)
	>660					0.95 (0.037)	1.05 (0.041)
<b>A<sub>TRIM</sub></b>	All	-	19.5 (0.768)	-	23.5 (0.925)	-	30.0 (1.18)
<b>L<sub>TRIM</sub></b>	All	2.41 (0.095)	4.69 (0.185)	2.41 (0.095)	4.69 (0.185)	2.41 (0.095)	4.69 (0.185)

Dimensions are in millimeters (inches)


1. 10mm lead spacing also available. See additional lead style options.

2. 7mm and 12mm devices also available upon request. Contact factory for details.


### Tape and Reel Specifications

- (available for voltage ratings up to 320V only)


#### CRIMPED LEADS "LT"

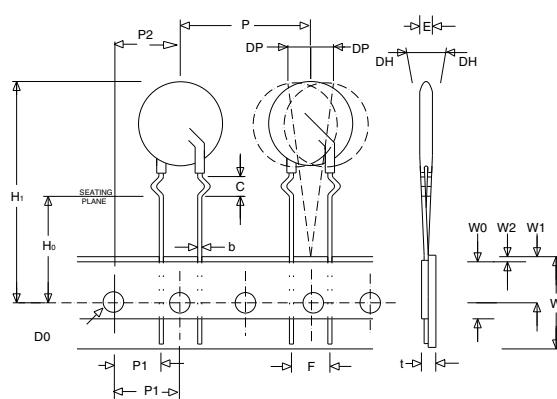

#### STRAIGHT LEADS "LS"

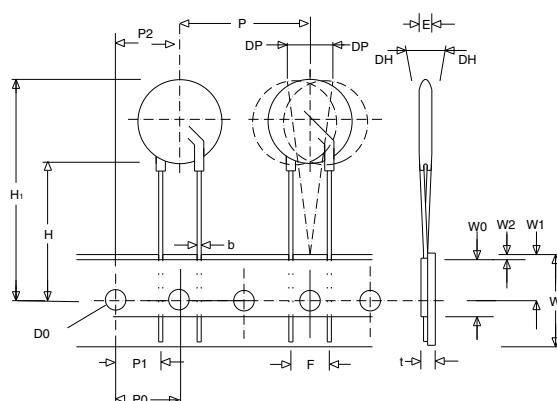


#### UNDER-CRIMPED LEADS "LU"

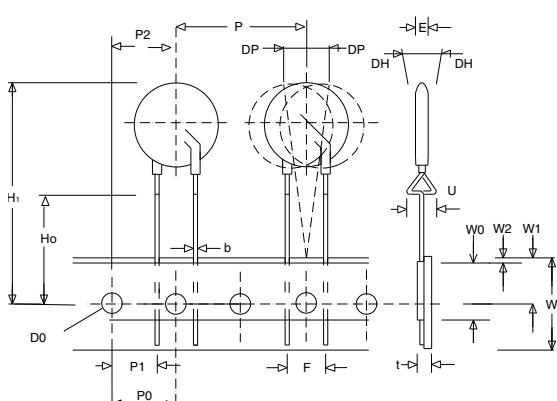

Symbol	Description	Model Size		
		10mm	14mm	20mm
<b>P</b>	Pitch of Component	25.4	-/+ 1.0	
<b>P<sub>0</sub></b>	Feed Hole Pitch	12.7	-/+ 0.2	
<b>P<sub>1</sub></b>	Feed Hole Center to Pitch	8.85	-/+ 0.8	
<b>P<sub>2</sub></b>	Hole Center to Component Center	12.7	-/+ 0.7	
<b>F</b>	Lead to Lead Distance	7.50	-/+ 0.8	
<b>h</b>	Component Alignment	2.00	Max	
<b>W</b>	Tape Width	18.25	-/+ 0.75	
<b>W<sub>0</sub></b>	Hold Down Tape Width	12.0	-/+ 0.3	
<b>W<sub>1</sub></b>	Hole Position	9.125	-/+ 0.625	
<b>W<sub>2</sub></b>	Hold Down Tape Position	0.5	Max	
<b>H</b>	Height From Tape Center To Component Base	19.0	-/+ 1.0	
<b>H<sub>0</sub></b>	Seating Plane Height	16.0	-/+ 0.5	
<b>H<sub>1</sub></b>	Component Height	36	Max	40 Max 46.5 Max
<b>D<sub>0</sub></b>	Feed Hole Diameter	4.0	-/+ 0.2	
<b>t</b>	Total Tape Thickness	0.7	-/+ 0.2	
<b>p</b>	Component Alignment	3°	Max	
<b>U</b>	Under crimp Width	8.0	Max	

## Part Numbering System

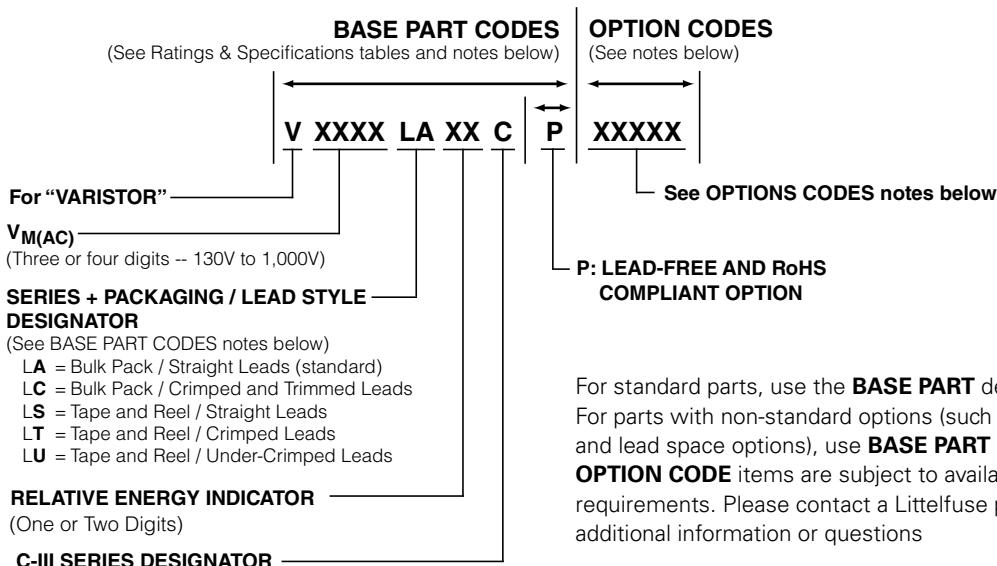

For standard parts, use the **BASE PART** designator only.  
For parts with non-standard options (such as additional form, packaging and lead space options), use **BASE PART + OPTION CODE**.  
**OPTION CODE** items are subject to availability and minimum order requirements. Please contact a Littelfuse products representative for additional information or questions

## Ordering Notes:

### BASE PART CODES:

#### Series + Packaging / Lead Style Designators:

Ordering examples:

Straight Lead Bulk Pack (standard)	Straight Lead Tape & Reel	Crimped Lead Tape & Reel	Crimped & Trimmed Lead Bulk Pack	Under-Crimp Lead Tape & Reel
V130LA20C	V130LS20C	V130LT20C	V130LC20C	V130LU20C

Crimped leads are standard on LA Series varistors supplied in tape and reel, denoted with "LT."

"LC" style is supplied in bulk only.

"LU" style is supplied in tape & reel only.

For crimped leads without trimming and any variations other than that described above, please contact Littelfuse.

#### Lead-free / RoHS Designator:

For Lead-free and RoHS compliant parts add "P" after the **BASE PART** number and before any other **OPTION CODE**:

Standard Model	Order As
V130LA20C	V130LA20CP

Standard Model with Option	Order As
V420LA20CX1347	V420LA20CPX1347

### OPTION CODES:

#### X10: 10MM LEAD SPACING OPTION --

For 10 (-/+1)mm lead spacing (available on 20mm diameter models only), append standard model BASE PART number with "X10." Example:

Standard Model	Order As
V130LA20C	V130LA20CX10

#### X2855: Nickel Barrier COATED WIRE OPTION --

All standard parts use Tin-Coated Copper wire. Nickel Barrier Coated wire is available as an option, consisting of Copper wire with a flashing of Nickel followed by a top coating of Tin. To order append standard model BASE PART number with "X2855." Example:

Standard Model	Order As
V130LA20C	V130LA20CX2855

Littelfuse C-III Series varistors are shipped standard in bulk pack with straight leads and lead spacing outlined in the Package Dimensions section of this data sheet. Contact a Littelfuse representative to discuss non-standard options.

### TAPE & REEL QUANTITIES:

Device Size	Voltage	Quantity Per Reel		
		"T" Reel	"S" Reel	"U" Reel
10mm	ALL	500	500	500
14mm	≤ 275V	500	500	500
	≥ 275V	400	400	400
20mm	≤ 275V	500	500	500
	≥ 275V	400	400	400