



Features

- (1) Block Terminal with Cover
Simple wire connection by block terminal.
High safety by terminal cover.
- (2) Three Phase Power Line Filter
Available for Star connection : 400Vac line-line
Available for Delta connection : 200Vac line-line
- (3) High Attenuation in Compact Package

Safety standard

- UL1283,
- CSA Std. C22. 2 No. 8
- EN133200 (New European Standard)


Specifications

ITEMS	MODEL	MB1310	MB1320	MB1330	MB1340	MB1350
1 Rated Voltage (AC)		500V(50/60Hz)				
2 Rated Current (AC) (Note 1)		10A	20A	30A	40A	50A
3 Test Voltage		2500VAC(20mA) Terminal to case, 1min. at 25°C, 70%RH				
4 Isolation Resistance		100MΩ min. Terminal to case, 500VDC at 25°C, 70%RH				
5 Leakage Current	250V 60Hz	1.0mA max.				
	500V 60Hz	2.0mA max.				
6 DC Resistance		80m Ω max.	30m Ω max.	20m Ω max.	11m Ω max.	7m Ω max.
7 Temperature Rise		35°C max.				
8 Operating Temperature		-25°C~+85°C				
9 Operating Humidity		30%~95% RH (No Dewdrop)				
10 Storage Temperature		-40°C~+85°C				
11 Storage Humidity		10%~95% RH (No Dewdrop)				
12 Vibration		10~55~10Hz,Amplitude (Sweep for 1min) 1.5mm(9G max.) X,Y,Z 2 hours each				
13 Safety Standard		Bilt to meet : UL1283,CSA C22.2 No.8, EN133200				
14 Weight (typ)		1800g	1800g	1800g	2800g	2800g
15 MTBF(hours) (Note 2)		573,000	480,000	521,000	421,000	395,000


(Note1): Value for $T_a \leq 50^\circ\text{C}$. For $T_a > 50^\circ\text{C}$ derate according to the derating curve shown below.

(Note2): Calculated based on the part stress analysis prediction method as specified in MIL-HDBK-217F.

DERATING

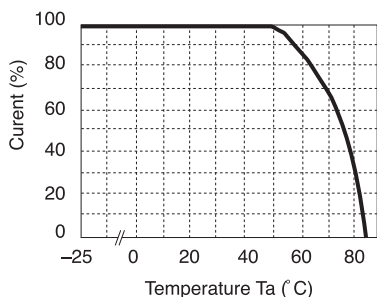


CIRCUIT

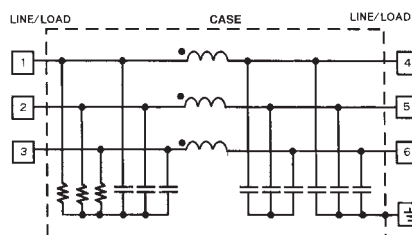


APPLICATIONS


Star connection
3 Phase 4 Wires 400V line-line. Unused Neutral line

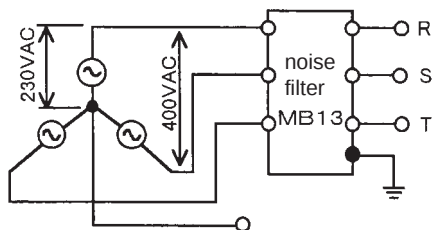

Delta Connection
3 Phase 3 Wires 200V line-line

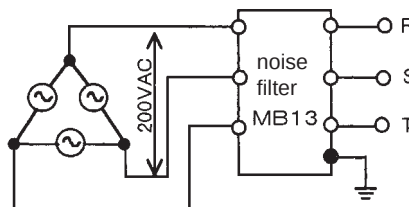


Note: For inverter application
Do not use MB series between
inverter and motor.

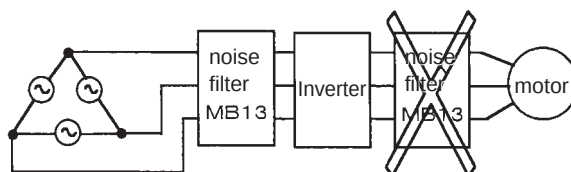


MB13-SERIES

- MB1310
- MB1320
- MB1330

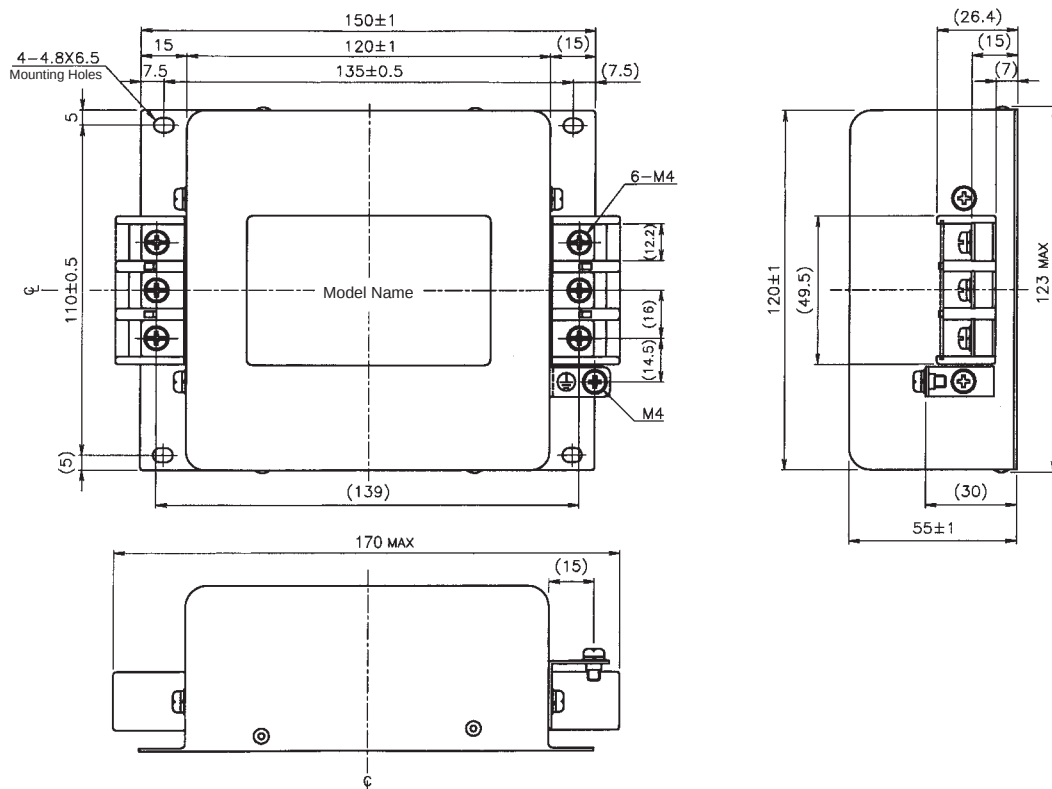

- MB1340
- MB1350

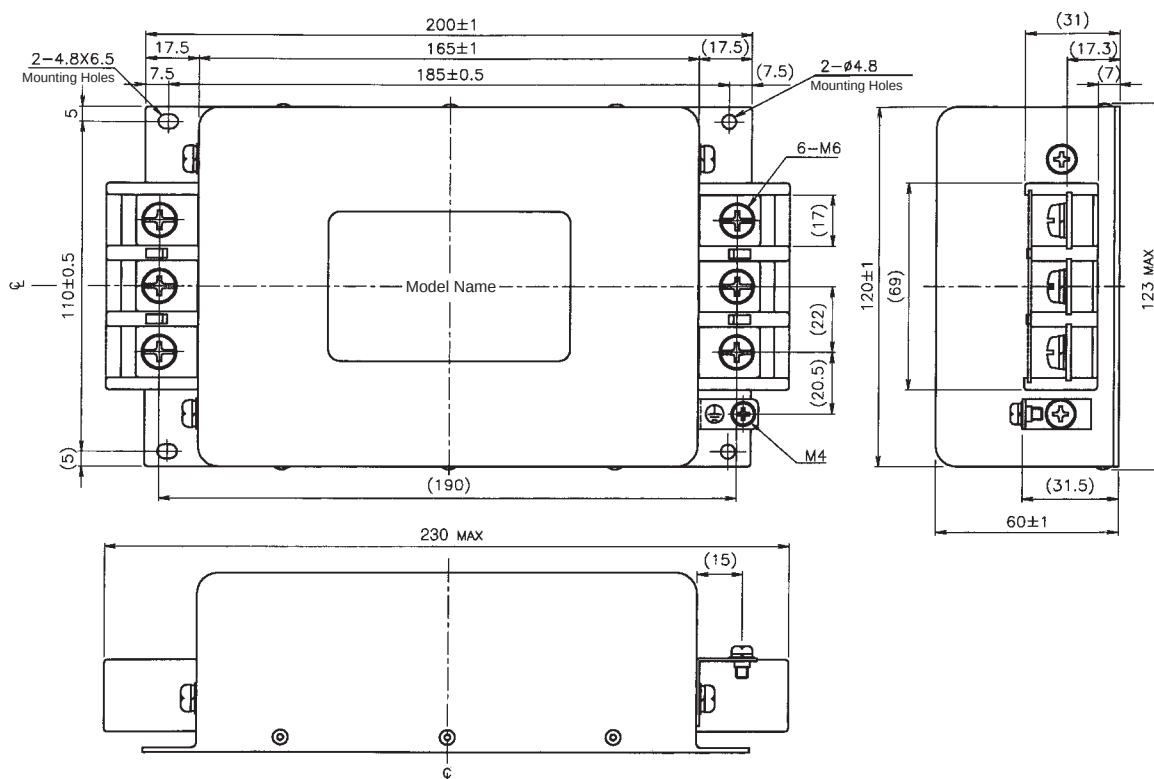


(Unit: mm)

CHARACTERISTICS


■ Typical Insertion Loss

(1) Asymmetrical


MB1310

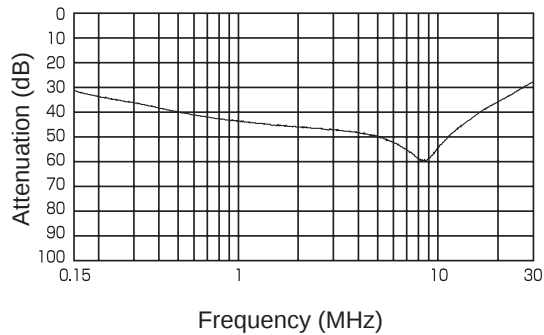


MB1320

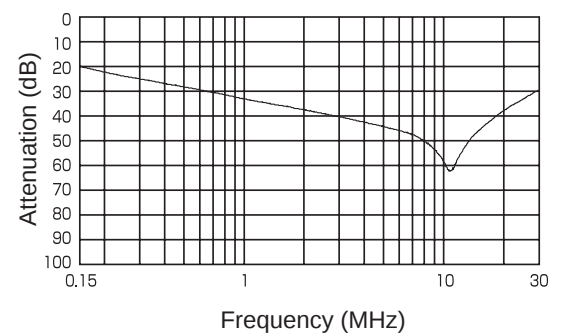


MB1330

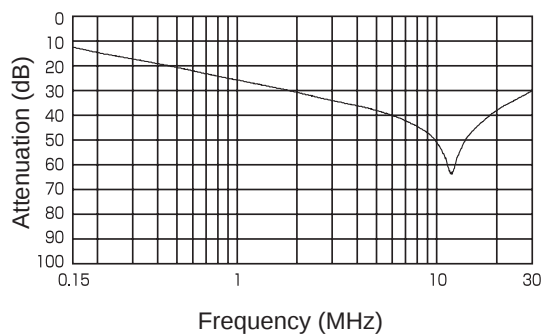

MB1340

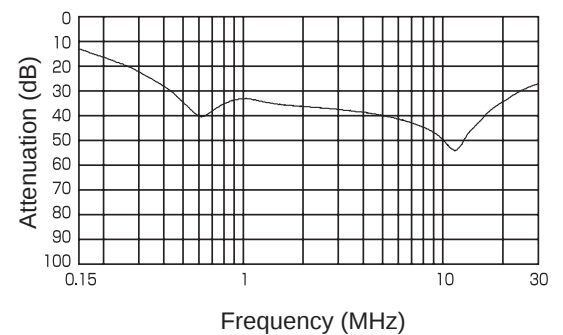


MB1350

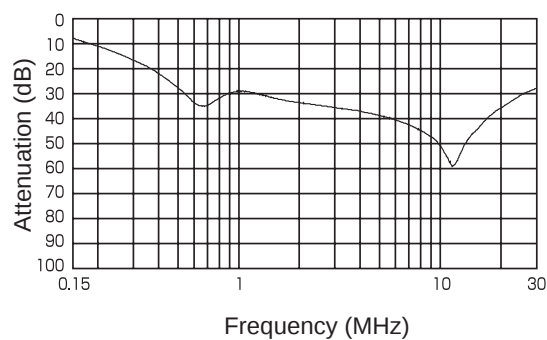


CHARACTERISTICS

■ Typical Insertion Loss
(2) Symmetrical


MB1310

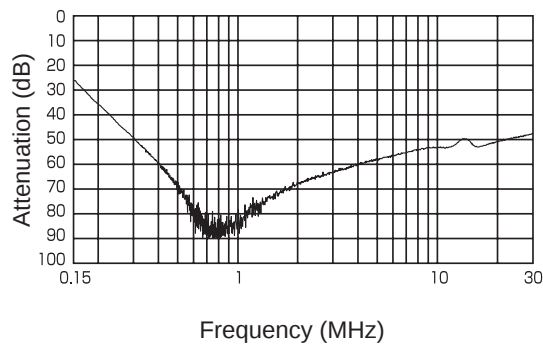


MB1320

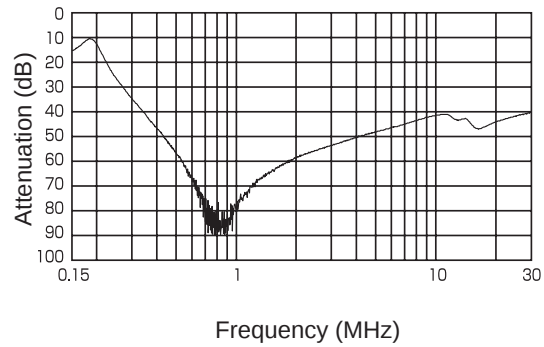


MB1330

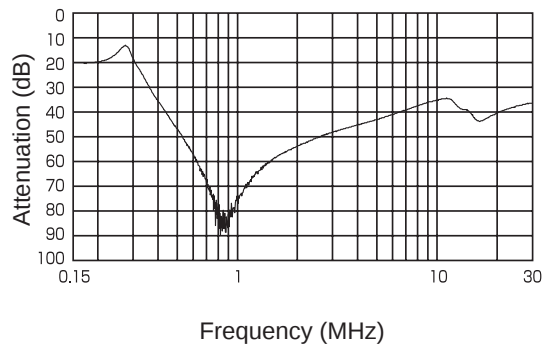

MB1340

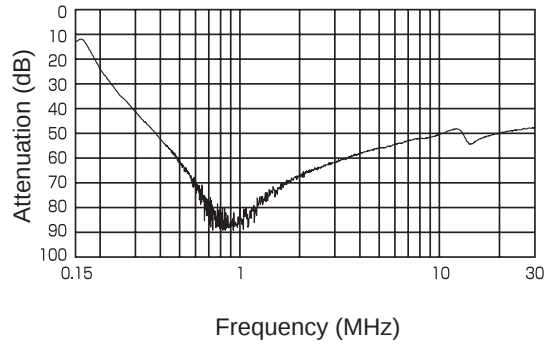

MB1350

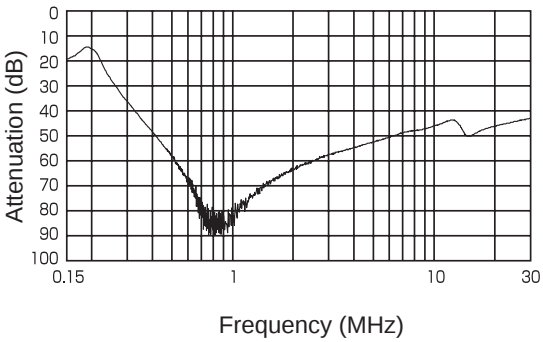

Noise Filter