

Features


Regulated Converter

- Sixteenth Brick Format
- 4:1 Input Voltage Range
- 2.25kV Basic Isolation
- Remote ON/OFF And Trim Pins
- UVLO, OTP, OVP, OCP and SCP
- Efficiency Up To 91%

RECOM
DC/DC Converter

RPA50S-W

50Watt
1/16 Brick
Single Output

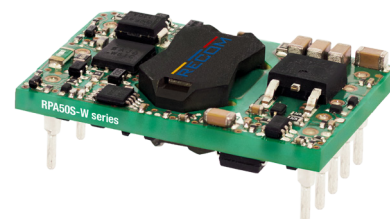

UL
E224736

UL60950-1 Certified
IEC/EN60950-1 Certified

Description

The RPA50S is a low cost 50W DC/DC converter in industry standard 1/16th brick format (33mm x 23mm) and pinning. The 4:1 input range covers 24V, 28V or 48V nominal input voltages and the output voltage options are 3.3V, 5V or 12V with +10%/-20% trim. Output power is 40W from 18-75V or 50W from 36-75V. The efficiency is particularly high (88-91%) to permit full load operation from -40°C up to +54°C ambient temperature with only free air convection and up to 85°C with forced air cooling. The isolation voltage is 2.25kVDC/1 minute (basic insulation grade). Applications include demanding industrial power supplies, telecom and PoE circuits.

Selection Guide

Part Number	nom. Input Voltage Range ⁽¹⁾ [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency max. ⁽¹⁾ [%]	Max. Capacitive typ. Load ⁽²⁾ [μF]
RPA50S-483.3SW/P	18-75	3.3	15	90.5	10000
RPA50S-4805SW/P	18-75	5	10	91	5000
RPA50S-4812SW/P	18-75	12	4.2	89	2200

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max. Cap Load is tested at nominal input and full resistive load

Model Numbering




Ordering Examples

RPA50S-4805SW/P = 48V Input, 5V Output, Single, Pos. CTRL function

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				Pi-Type
Input Voltage Range	nom. Vin = 48V	18VDC	48VDC	75VDC
Input Surge Voltage	100ms			100VDC
Under Voltage Lockout (UVLO)	DC-DC ON DC-DC OFF	16VDC 15VDC	17VDC 16VDC	18VDC 17VDC
Input Current Range	18Vin			3.9A
Quiescent Current	3.3Vout 5Vout 12Vout		30mA 40mA 20mA	

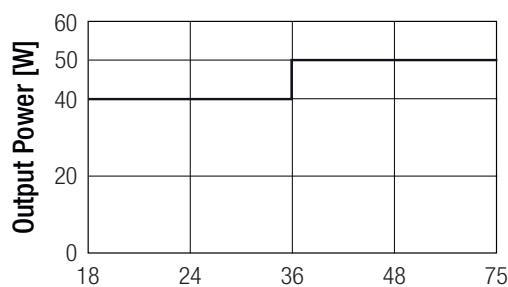

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition		Min.	Typ.	Max.
Output Voltage Trimming			-20%		+10%
Minimum Load			0%		
Start-up Time	Power up Remote ON/OFF			30ms 30ms	
ON/OFF CTRL	Positive Logic	3.3 & 5Vout	DC-DC ON DC-DC OFF	Open or $2.4\text{V} < V_r < 18\text{V}$ Short or $0\text{V} < V_r < 0.8\text{V}$	
		12Vout	DC-DC ON DC-DC OFF	Open or $2\text{V} < V_r < 18\text{V}$ Short or $0\text{V} < V_r < 0.8\text{V}$	
Input Current of CTRL pin					1mA
Standby Current					6.5mA
Internal Operating Frequency	3.3 & 5Vout 12Vout			580kHz 440kHz	
Output Ripple & Noise ⁽³⁾	5MHz to 20MHz BW.	3.3 & 5Vout		60mVp-p	150mVp-p
		12Vout		100mVp-p	
Remote Sense					10%

Notes:


Note3: measured with 1 μF ceramic and 10 μF tantalum in parallel across O/P

RPA50S-483.3SW/P

Efficiency vs. Output Current

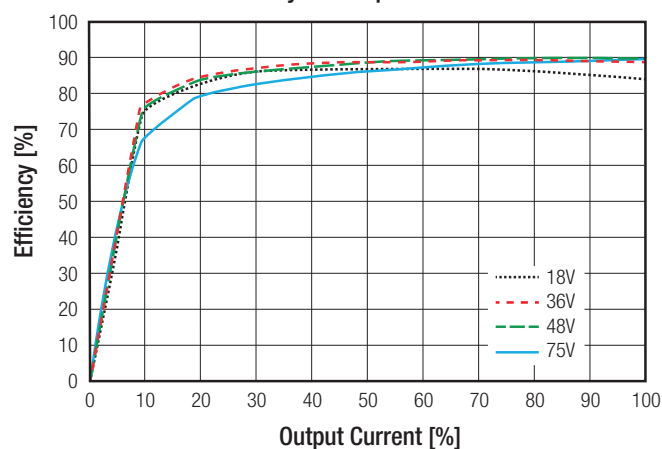


Power Dissipation vs. Output Current

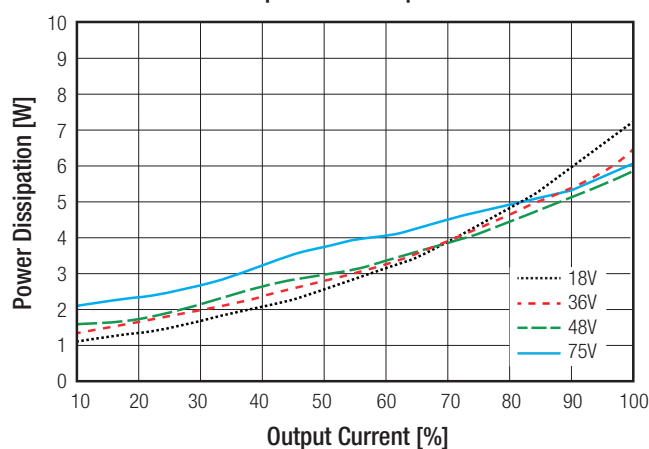


RPA50S-4805SW/P

Efficiency vs. Output Current

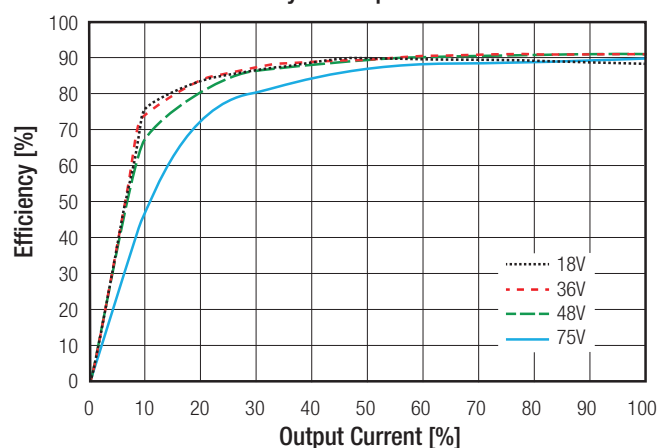

Power Dissipation vs. Output Current

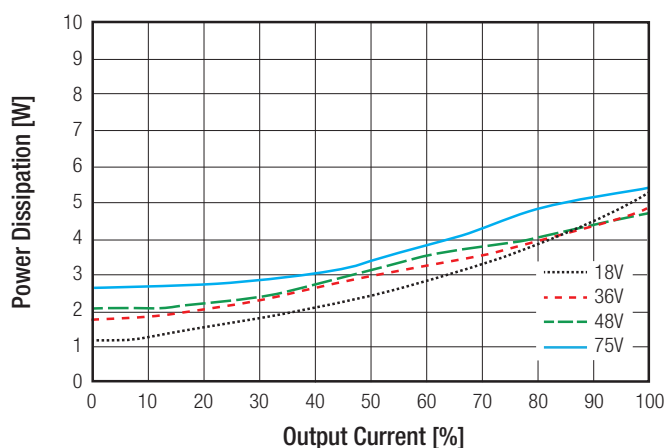


continued on next page


Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

RPA50S-4812SW/P

Efficiency vs. Output Current

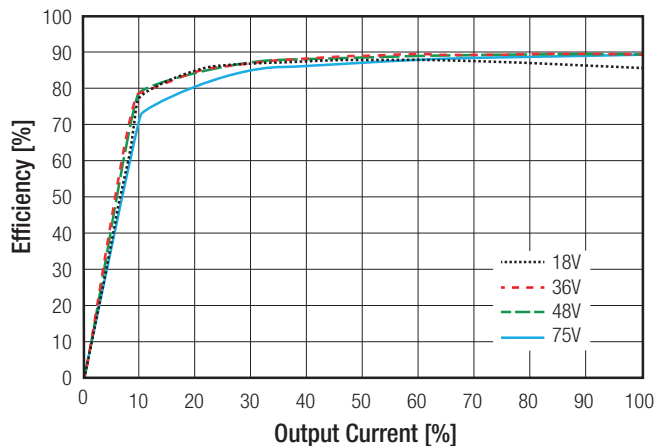


Power Dissipation vs. Output Current

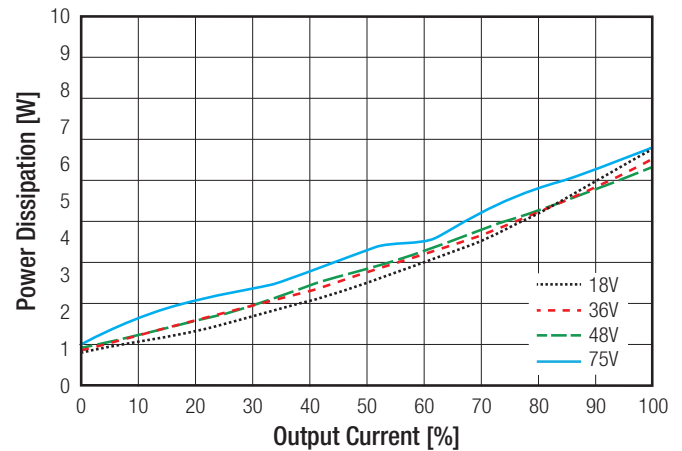

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

RPA50S-W converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.

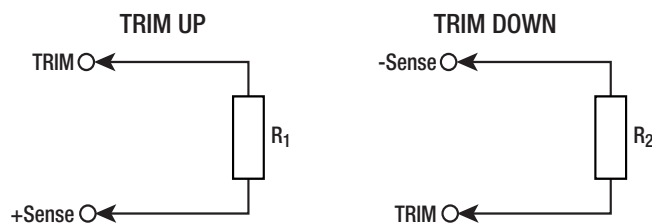

Trim Calculation

Trim Up:

3.3, 5 V_{out}

12 V_{out}

$$R_1 = \frac{5.11 \cdot V_{out} \cdot (100 + \Delta V_{out})}{1.24 \cdot \Delta V_{out}} - \frac{511}{\Delta V_{out}} - 10.22 \text{ k}\Omega$$

$$R_1 = \frac{5.11 \cdot V_{out} \cdot (100 + \Delta V_{out})}{1.225 \cdot \Delta V_{out}} - \frac{511}{\Delta V_{out}} - 10.22 \text{ k}\Omega$$

V_{out} = Output Voltage

ΔV_{out} = Output Voltage Change in %

R_1 = trim up resistor

R_2 = trim down resistor

Trim Down:

$$R_2 = \frac{511}{\Delta V_{out}} - 10.22$$

Practical Example:

Trim Up:

$V_{out} = 12\text{V}$, $\Delta V_{out} = +10\%$ (13.2V)

$$R_1 = \frac{5.11 \cdot 12 \cdot (100 + 10)}{1.24 \cdot 10} - \frac{511}{10} - 10.22 = \frac{6745.2}{12.24} - 51.1 - 10.22 = 489.3 \text{ k}\Omega$$


Trim down:

$V_{out} = 12\text{V}$, $\Delta V_{out} = -10\%$ (10.8V)

$$R_2 = \frac{511}{10} - 10.22 = 40.88 \text{ k}\Omega$$

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

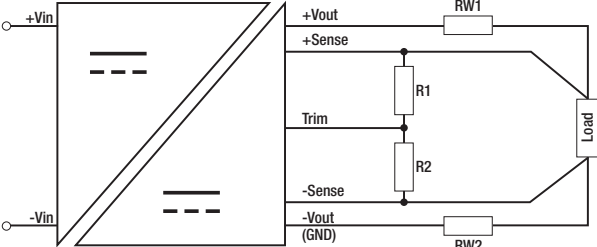
RPA50S-483.3SW/P											
Trim up	1	2	3	4	5	6	7	8	9	10	%
$V_{out} =$	3.33	3.37	3.40	3.43	3.47	3.50	3.53	3.57	3.60	3.63	Volts
$R_1 =$	845	432	287	215	174	143	124	110	97.60	88.7	kOhms
RPA50S-4805SW/P											
Trim up	1	2	3	4	5	6	7	8	9	10	%
$V_{out} =$	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	Volts
$R_1 =$	1540	787	523	402	324	267	232	205	182	165	kOhms
RPA50S-4812SW/P											
Trim up	1	2	3	4	5	6	7	8	9	10	%
$V_{out} =$	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	Volts
$R_1 =$	4530	2280	1540	1150	931	787	681	604	536	487	kOhms
Trim Down all Vout's											
Trim down	1	2	3	4	5	6	7	8	9	10	%
$R_2 =$	499	243	162	118	93.1	75.0	63.4	53.6	46.4	41.2	kOhms
Trim down	11	12	13	14	15	16	17	18	19	20	%
$R_2 =$	36.5	33.2	29.4	26.1	23.7	21.7	20.0	18.20	16.9	15.0	kOhms
REMOTE SENSE											
						The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range $\pm 10\%$. Derate the maximum output power if using the trim or sense function. R_{W1} ... wire losses + R_{W2} ... wire losses - R_1 ... trim up resistor R_2 ... trim down resistor					

REGULATIONS			
Parameter	Condition		Value
Output Accuracy			$\pm 3.0\%$
Line Regulation	3.3Vout 5 & 12Vout		$\pm 0.3\%$ max. $\pm 0.1\%$ max.
Load Regulation	0% - 100% load	3.3Vout 5Vout 12Vout	$\pm 0.3\%$ max. $\pm 0.2\%$ max. $\pm 0.1\%$ max.
Transient Response	3.3 & 5Vout	25% to 50% load step change 50% to 25% load step change setting time	100mV typ. 100mV typ. 200 μ s typ.
	12Vout	25% to 50% load step change 50% to 25% load step change setting time	400mV typ. 400mV typ. 500 μ s typ.
continued on next page			


Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

Accuracy vs Load


RPA50-483.3SW/P

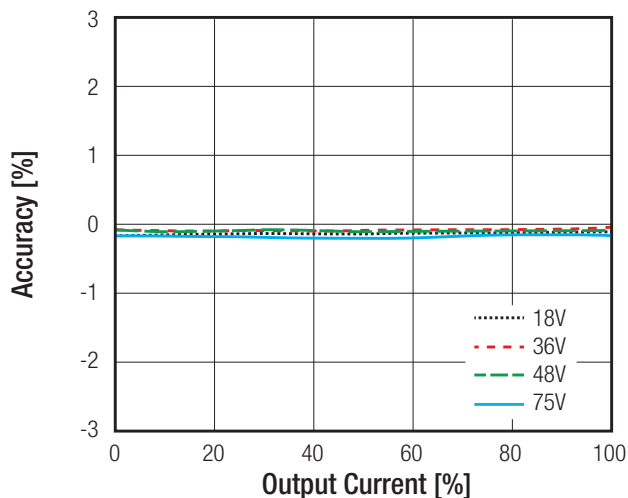

RPA50-4805SW/P

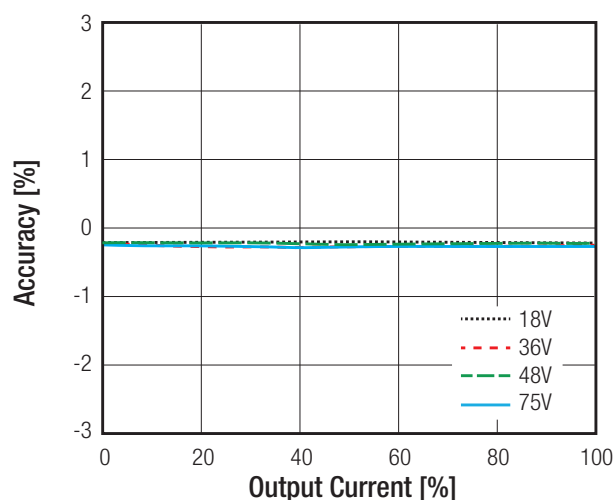

RPA50-4812SW/P

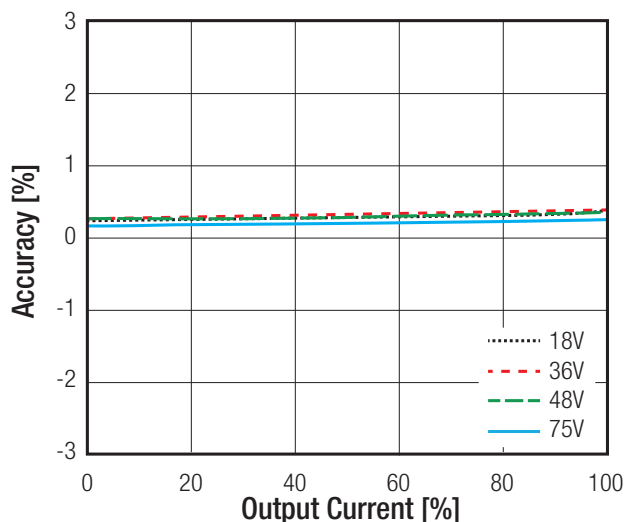

PROTECTIONS

Parameter	Type		Value
Short Circuit Protection (SCP)	below $100\text{m}\Omega$		hiccup mode, auto recovery
Over Voltage Protection (OVP)	3.3 & $5V_{out}$		115% - 140%, hiccup mode
	12 V_{out}		120% - 150%, hiccup mode
Over Current Protection (OCP)			110% - 140%, hiccup mode
Over Temperature Protection (OTP)			130°C , hiccup mode
Isolation Voltage ⁽⁴⁾	I/P to O/P	rated for 1 minute	2.25kVDC
Isolation Resistance			$10\text{M}\Omega$ min.
Isolation Capacitance			1000pF typ.
Leakage Current			0.23mA max.
Insulation Grade			Basic

Notes:

Note4: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note5: An input fuse is required if the mains supply is not over-current protected. Recommended fuse T10A slow blow type

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Temperature Range	without derating (@ natural convection 0.1m/s, see graph)	-40°C to +54°C
Over Temperature Shutdown	@ TC	+130°C typ.
Temperature Coefficient		0.02%/°C
Operating Altitude		5000m
Operating Humidity	non-condensing	95% RH max.
Pollution Degree		PD2
MTBF	according to Telcordia SR332 Issue 2 Method I standard, 25°C	3.3Vout 5Vout 12Vout 2758 x 10 ³ hours 3757 x 10 ³ hours 10084 x 10 ³ hours

Thermal Calculation

Thermal Impedance	
airflow [m/s]	R _{th} with PCB [°C/W]
0.1	11.5
0.2	11.2
0.5	9.9
1.0	8.5
1.5	7.5

Notes:

Note6: Test PCB:160x100mm105µm (Eurocard), double layer

$I_{out} = 100\%$
 $R_{th} = 9.9^\circ\text{C/W}$
 $P_{DISS} = 6\text{W}$
 $T_{ICmax} = 122^\circ\text{C}$


choose your model:

RPA50S-4812SW/P

- Load conditions in application (e.g. 100%)
- Airflow conditions in application (e.g. 0.5m/s)
- use R_{th} from above shown table (9.9°C/W)

$$T_{OVER} = R_{th} \times P_{DISS} = 9.9^\circ\text{C/W} \times 6\text{W} = 59.4^\circ\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 122^\circ\text{C} - 59.4^\circ\text{C} = 63^\circ\text{C}$$

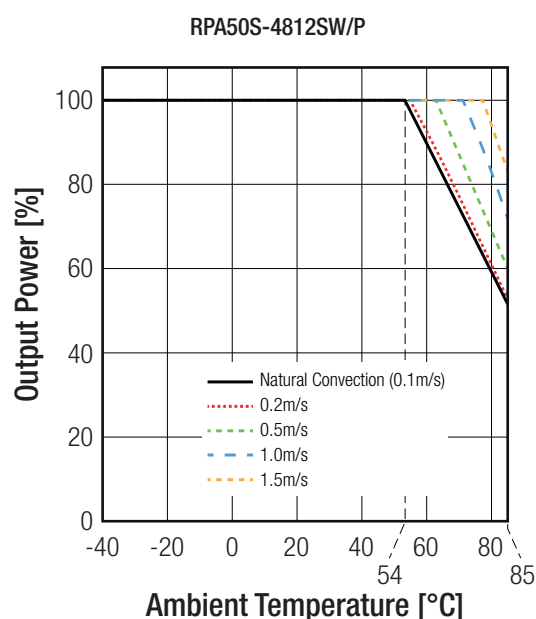

SAFETY AND CERTIFICATIONS

Certificate Type	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A44	UL60950-1 CAN/CSA C22.2 No. 60950-1-07
Information Technology Equipment, General Requirements for Safety	50089713 001	IEC60950-1, 2nd Edition, 2005 + AM2, 2013 EN60950-1, 1st Edition, 2006 + AM2, 2013


continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS COMPLIANT

EMC Compliance	Conditions	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter	EN55032, Class B

EMC Filtering according to EN55032 Class B


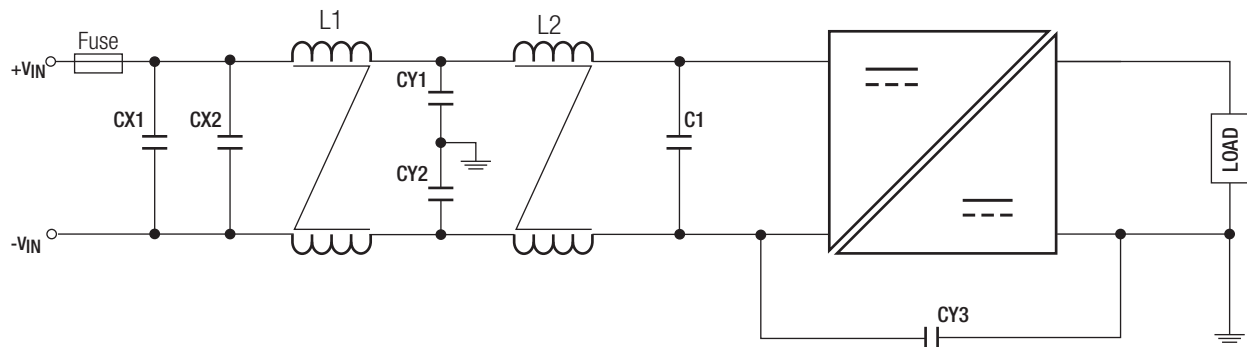


CX1	CX2	L1	CY1, CY2	L2	C1	CY3
1 μF ceramic cap.	4.7 μF ceramic cap.	0.2mH common mode inductor	4.7nF ceramic cap.	0.5mH common mode inductor	100 μF low ESR aluminium cap.	10nF ceramic cap.

DIMENSION and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Base	FR4, (UL94 V-0)
Package Dimension (LxWxH)		33.0 x 22.8 x 9.5mm
Package Weight		12.1g typ.

Dimension Drawing (mm)

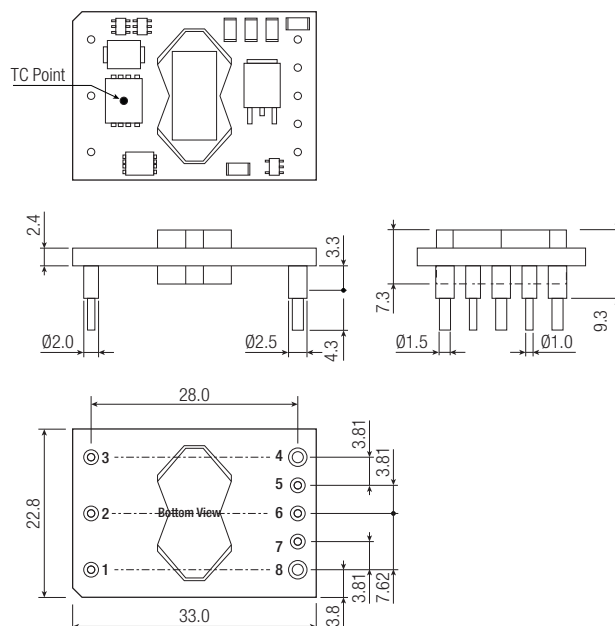

Pin Connections

Pin #	Single
1	+Vin
2	CTRL
3	-Vin
4	-Vout
5	-Sense
6	Trim
7	+Sense
8	+Vout

Tolerance: X.X $\pm 0.5\text{mm}$
X.XX $\pm 0.25\text{mm}$

Specifications (measured @ $t_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	card board box	221 x 128 x 33mm
Packaging Quantity		12pcs
Storage Temperature Range		-55°C to $+125^\circ\text{C}$
Storage Humidity	non-condensing	95% RH max.