



3M™ THREE-WALL CONDO HEADER, 3000 SERIES


.100" X .100" LATCH/EJECTOR, RIGHT ANGLE

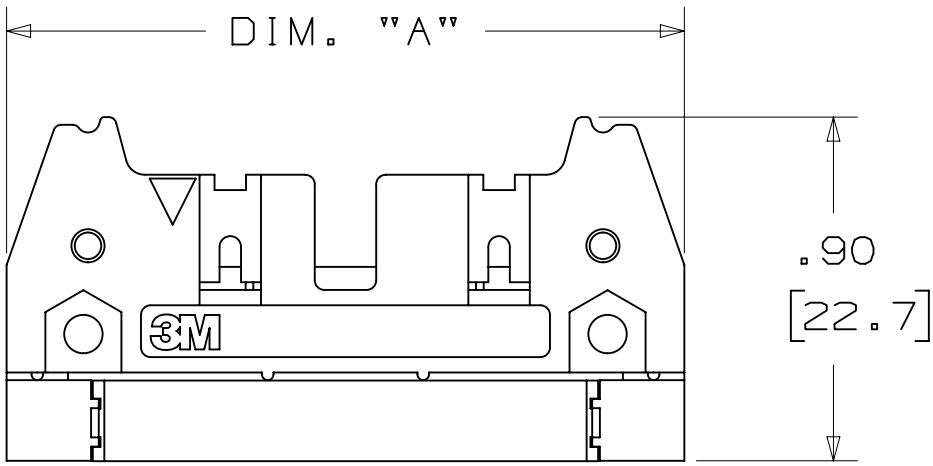

-D00X
HEADER WITHOUT LATCH/EJECTOR

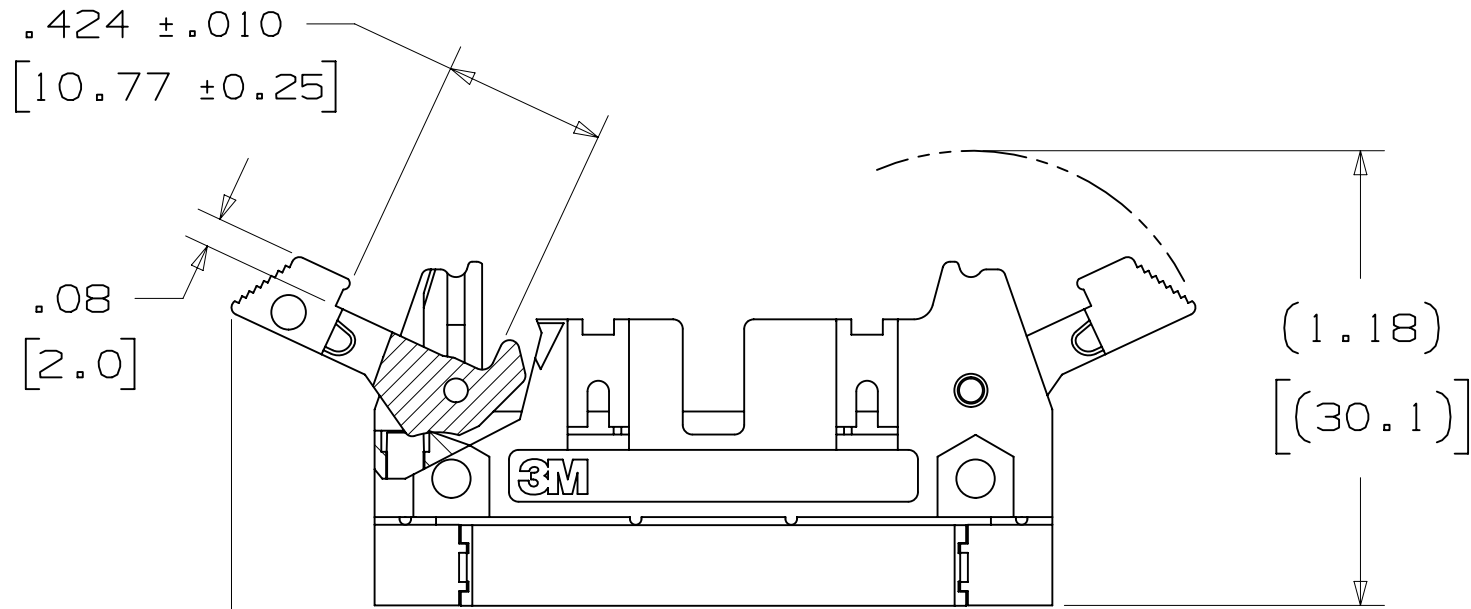

(.37) [(9.5)]
-D20X
HEADER WITH SHORT LATCH/EJECTOR
FOR 3M SOCKETS WITHOUT STRAIN RELIEF

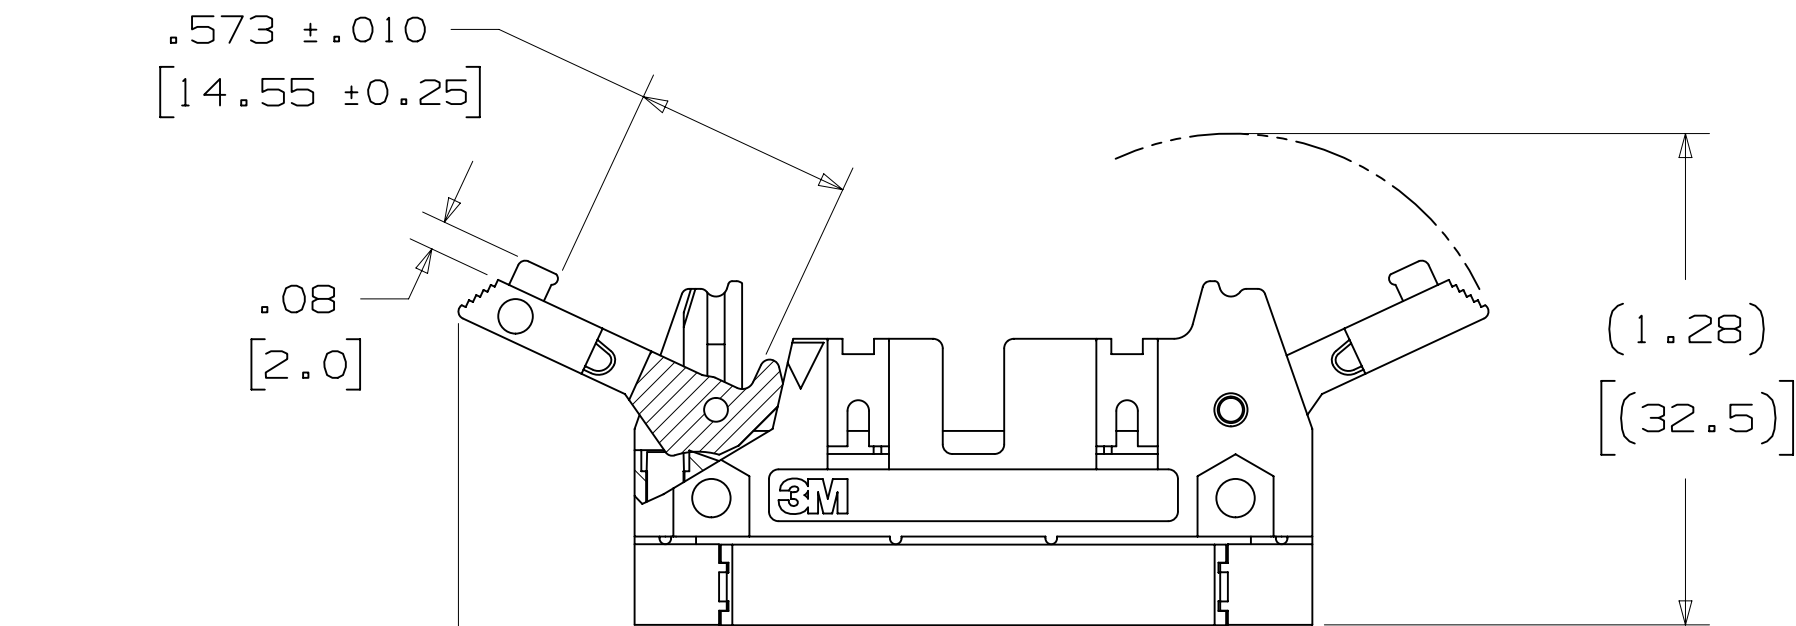

(.46) [(11.7)]
-D30X
HEADER WITH LONG LATCH/EJECTOR
FOR 3M SOCKETS WITH STRAIN RELIEF

ORDERING INFORMATION

X3XXX-DXXXXX

N= HIGH TEMP BLACK (PCT)/(RB PLATING REQ'D)
BLANK= (UB PLATING)

3M PART NUMBER:
(SEE TABLE 1)

LATCH/EJECTOR SYSTEM:
0 = NO LATCH/EJECTOR INSTALLED
2 = SHORT ROLL PIN LATCH/EJECTORS
3 = LONG ROLL PIN LATCH/EJECTORS

PLATING:
RB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm] MATTE TIN
(APP. E1 & C1 APPLY)
UB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm]
TIN LEAD (APP. E3 & C2 APPLY)

TAIL:
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD

- * STACKED PINS CONSERVE SPACE ON THE CIRCUIT BOARD ALLOWING HIGHER DENSITY PACKAGING.
- * PIN QUANTITY TO 128 GIVES DESIGN FLEXIBILITY WITH LATCHING.
- * "HDI" ALTERNATIVE.
- * THREE-WALL FITS IN VME BOARD STACKING CRITERIA.
- * ACCEPTS STANDARD IDC SOCKETS.
- * MATES WITH STANDARD FLAT CABLE HARNESSES.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.

2 PHYSICAL :

INSULATOR: GLASS FILLED POLYESTER (PCT)
MATERIAL: UL94V-0
FLAMMABILITY: COLOR: BLACK
CONTACT: MATERIAL: COPPER ALLOY
PLATING: UNDER PLATING: 100μ" [2.54μm] NICKEL-OVERALL
WIPING AREA: 30μ" [0.76μm] AVG. GOLD
SOLDER TAILS: 200μ" [5.08μm] TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

2 ELECTRICAL :

CURRENT RATING: 1A (EIA 364-70)
INSULATION RESISTANCE: >1 X 10⁹Ω AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL


2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)


NOTES

1. REGULATORY INFORMATION:
ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION.
2. IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.
3. NOTCHES A & C WILL ACCOMMODATE 3M POLARIZING KEY: N3518.
4. MOUNTING HARDWARE:
FROM SOLDER SIDE OF PC BOARD USE #4-24 THREAD CUTTING SCREW (3M PART #3341-5) WITH Ø.116 [2.95] MOUNTING HOLE.

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACCESS CODES						DATE AUG 05, 2014		MRG	DATE
						DATE		APRVL R. SCHERER	DATE SEP 05, 2014
DIVISION		DIVISION CODE							
Interconnect Solutions		EMSD							
DO NOT SCALE DRAWING		SCALE 2 1		TOLERANCES EXCEPT AS NOTED					
				INCHES					
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS					
MAX. SURFACE ROUGHNESS		DARK SURFACES		.00 ± .13					
☒ MARKED ONLY				.00 ± .13					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					
				.000 ± .005					

3M™ THREE-WALL CONDO HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, RIGHT ANGLE

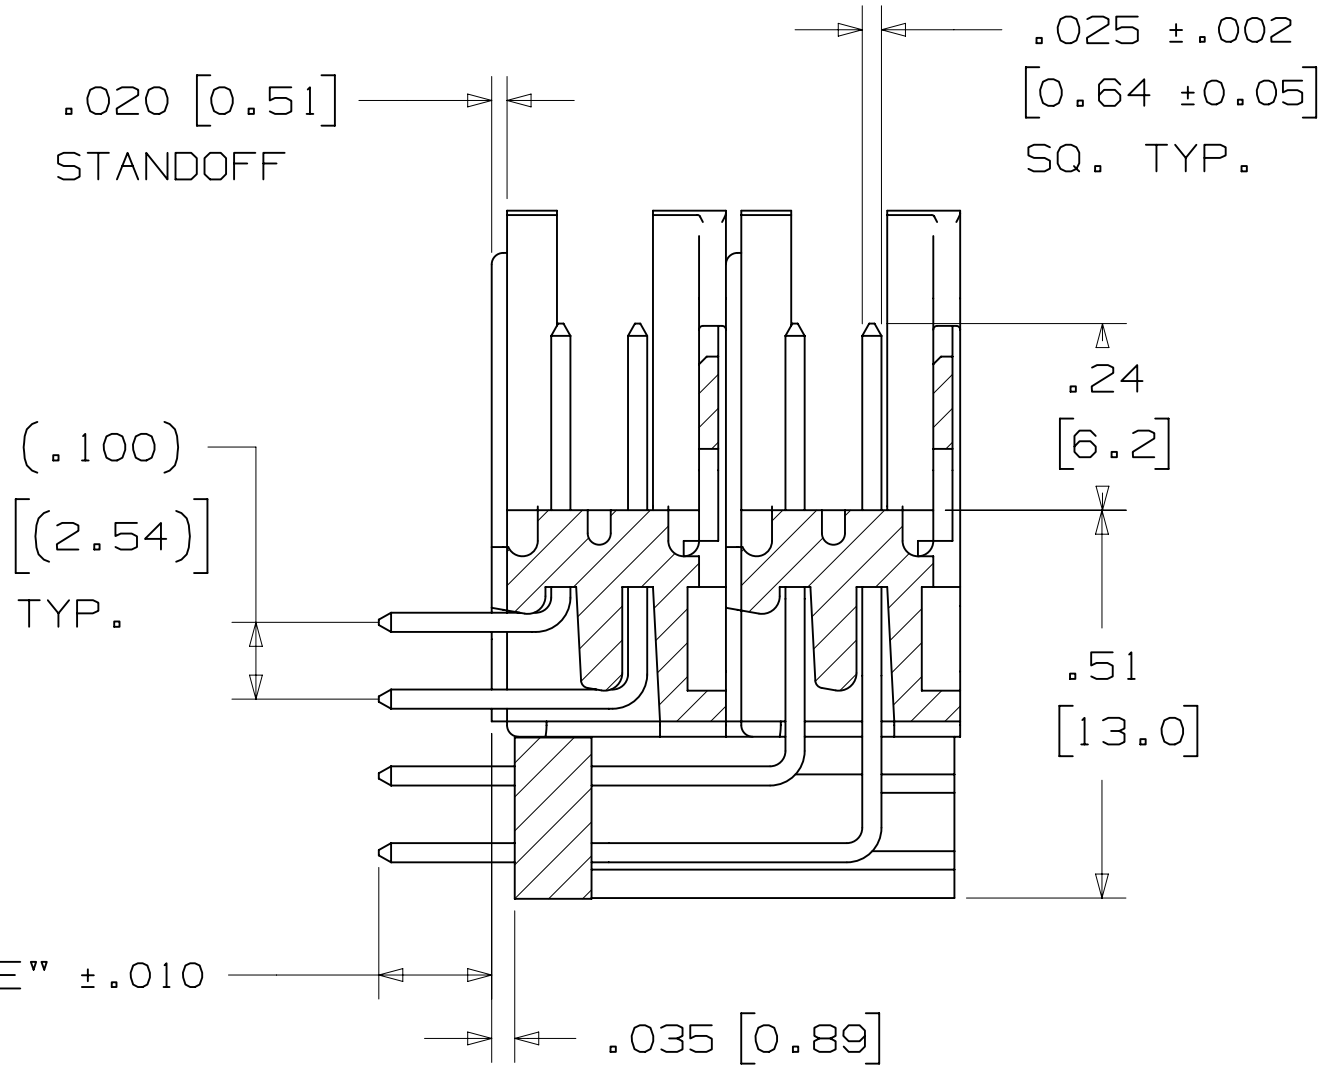


SECTION A - A

TABLE 1						
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
20	3793	1.26 [32.1]	.865 [21.97]	.71 [18.0]	BC	20
28	3314	1.46 [37.2]	1.065 [27.05]	.91 [23.1]	BC	28
32	3408	1.56 [39.7]	1.165 [29.59]	1.01 [25.6]	ABC	32
40	3428	1.76 [44.8]	1.365 [34.67]	1.21 [30.7]	ABC	40
48	3627	1.96 [49.9]	1.565 [39.75]	1.41 [35.8]	ABC	48
52	3429	2.06 [52.4]	1.665 [42.29]	1.51 [38.3]	ABC	52
60	3440	2.26 [57.5]	1.865 [47.37]	1.71 [43.4]	ABC	60
68	3431	2.46 [62.6]	2.065 [52.45]	1.91 [48.5]	ABC	68
80	3432	2.76 [70.2]	2.365 [60.07]	2.21 [56.1]	ABC	80
100	3433	3.26 [82.9]	2.865 [72.77]	2.71 [68.8]	ABC	100
120	3372	3.76 [95.6]	3.365 [85.47]	3.21 [81.5]	ABC	120
128	3764	3.96 [100.7]	3.565 [90.55]	3.41 [86.6]	ABC	128


TABLE 2		
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"
-XX02	02	.112 [2.84]
-XX03	03	.155 [3.94]

NOTE:
.112 [2.84] TAIL LENGTH SUITABLE FOR
.062 [1.57] THICK PC BOARD.

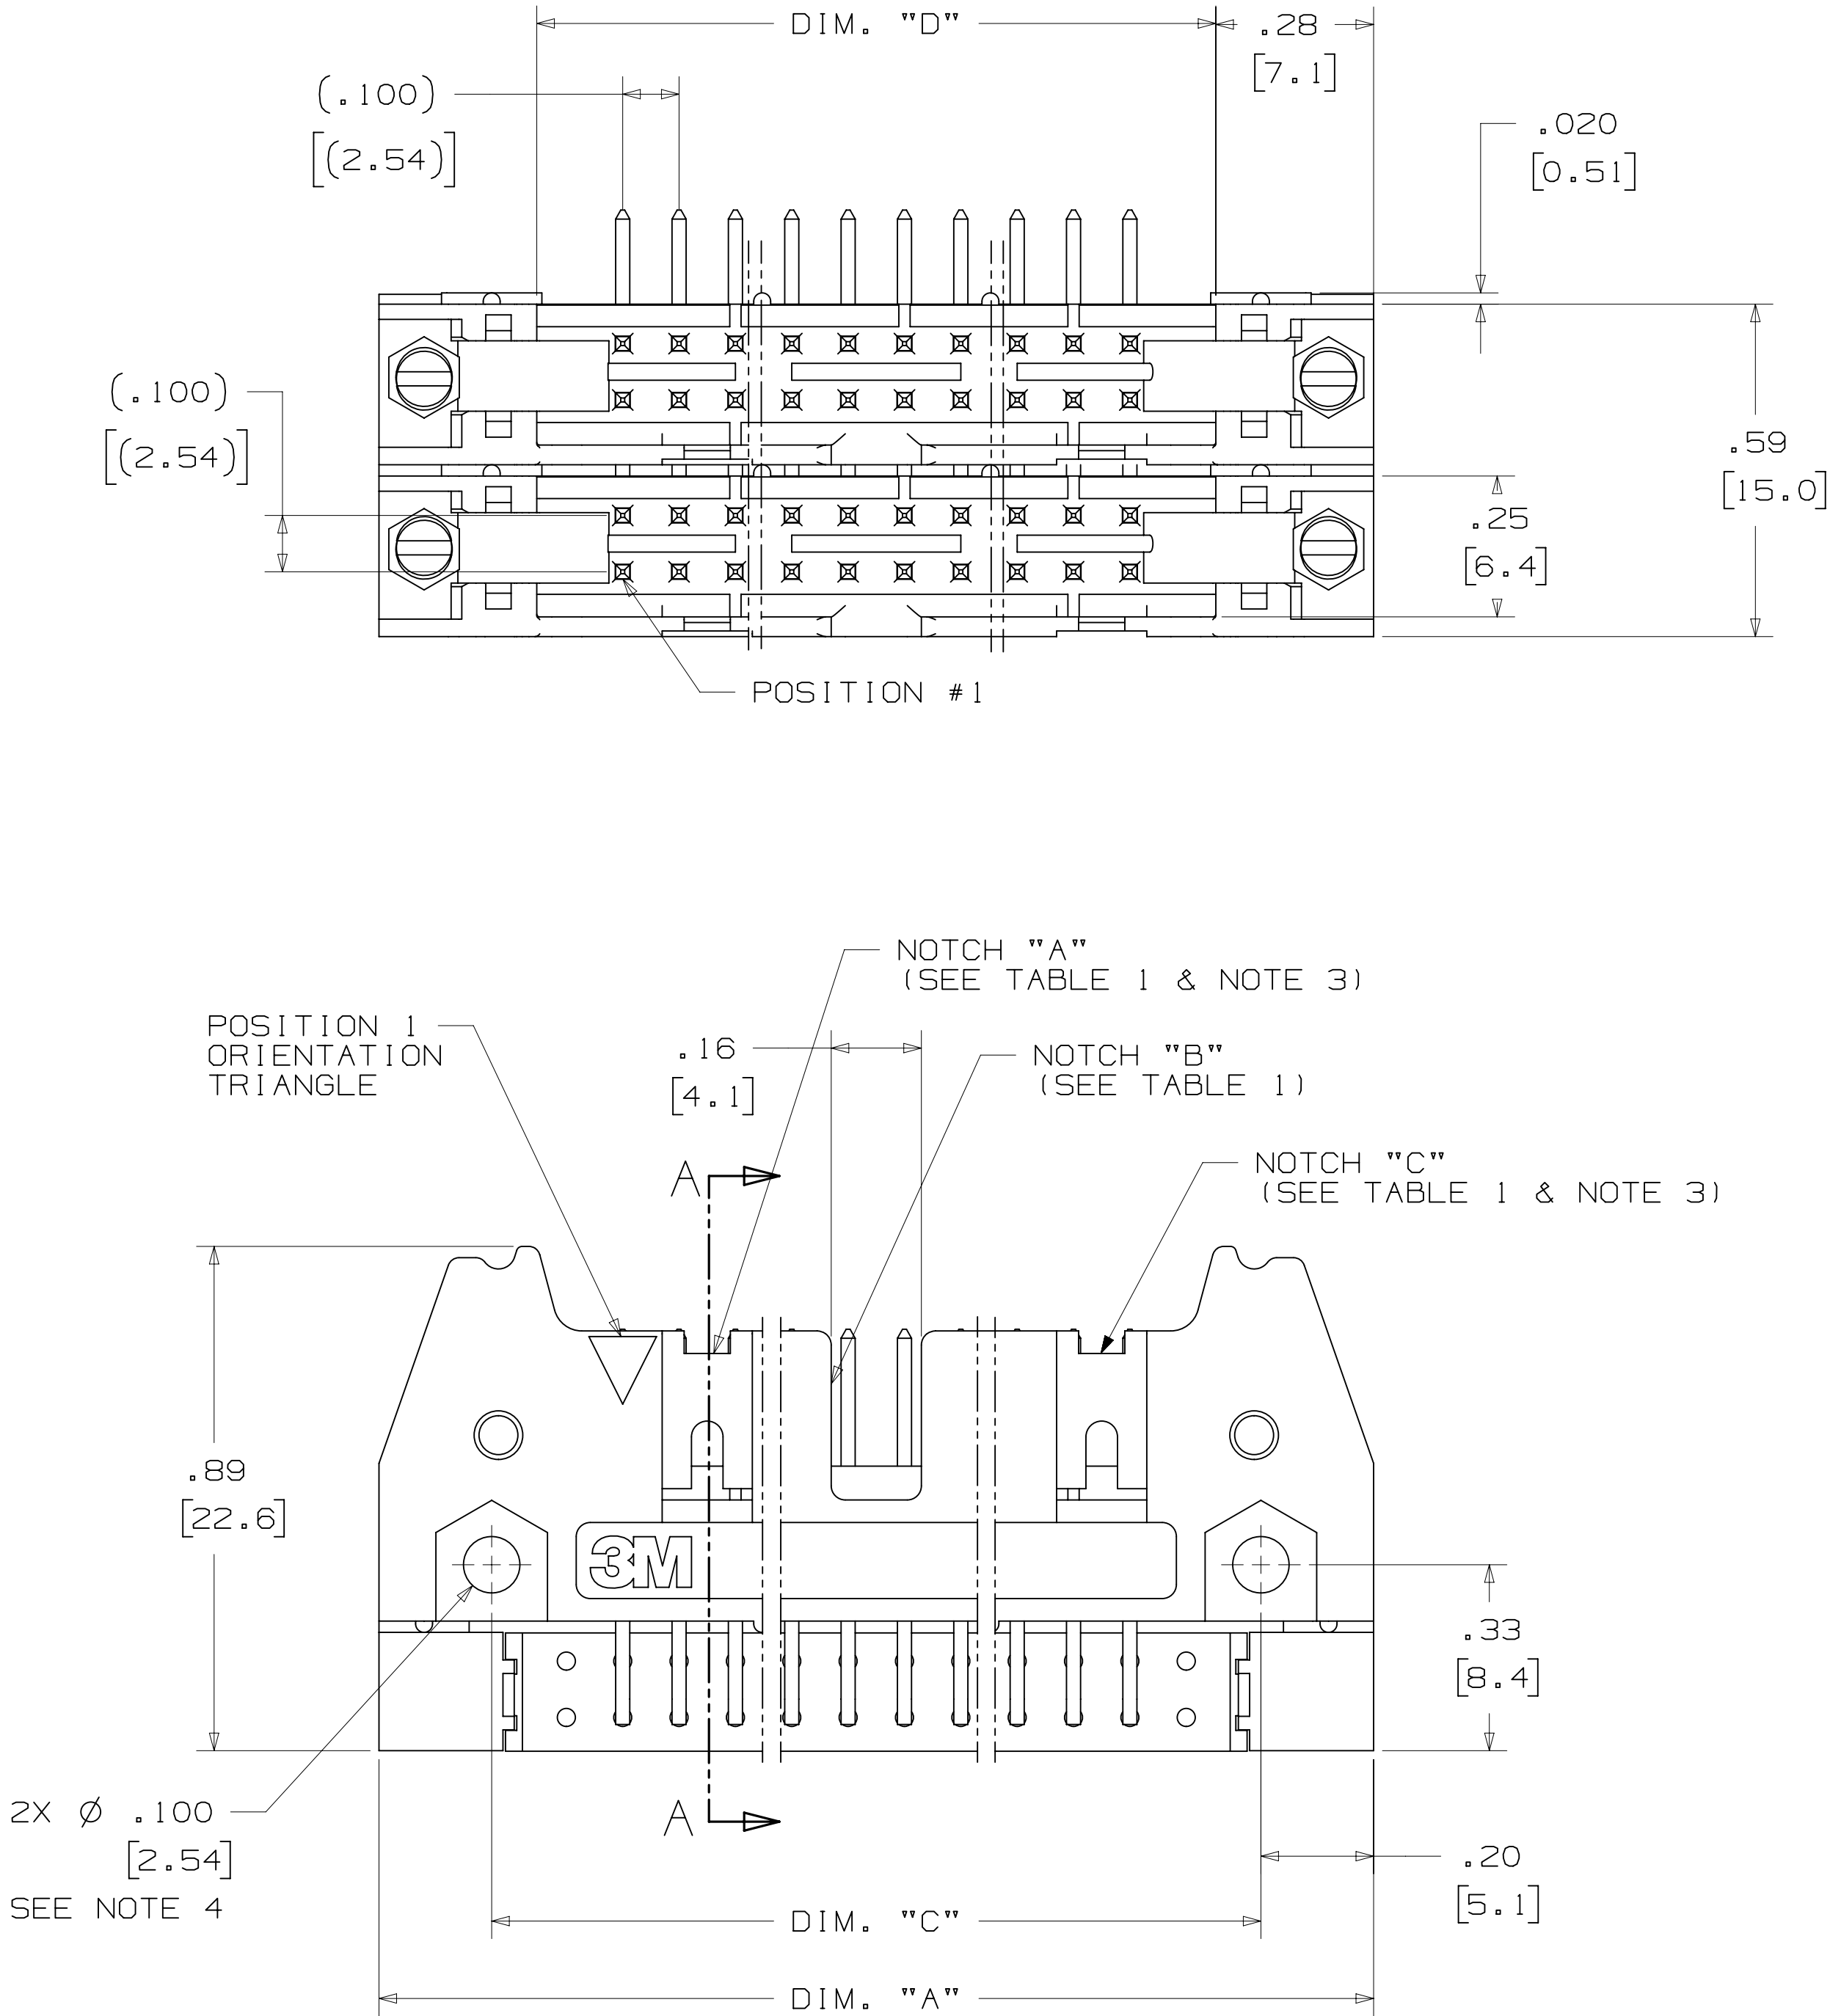



DESIGN REFERENCE		NEXT ASSEMBLY		
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DR	CASTIGLIONE	DATE	AUG 05, 2014	MFG
CHKD		DATE		DATE
DIVISION		DIVISION CODE		
Interconnect Solutions		EMSD		
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED		
THIRD ANGLE PROJECTION		INCHES		
INTERPRET PER ASME Y14.5 - 2009		MILLIMETERS		
MAX SURFACE ROUGHNESS		.00 ± .01		
SURFACES		.000 ± .005		
MARKED ONLY		.0000 ± .0000		
		.0 ± .3		
		.00 ± .13		
		.000 ± .000		
		ANGLES		
TITLE				
HEADER, 3-WALL, CONDO, .100 X .100 LATCH/EJECTOR, RA				
CAGE NUMBER				
D78-5100-0773-1				
MODEL				
3000 SERIES				
REV.				
K				
SHT 2 OF 3				

3M™ THREE-WALL CONDO HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, RIGHT ANGLE

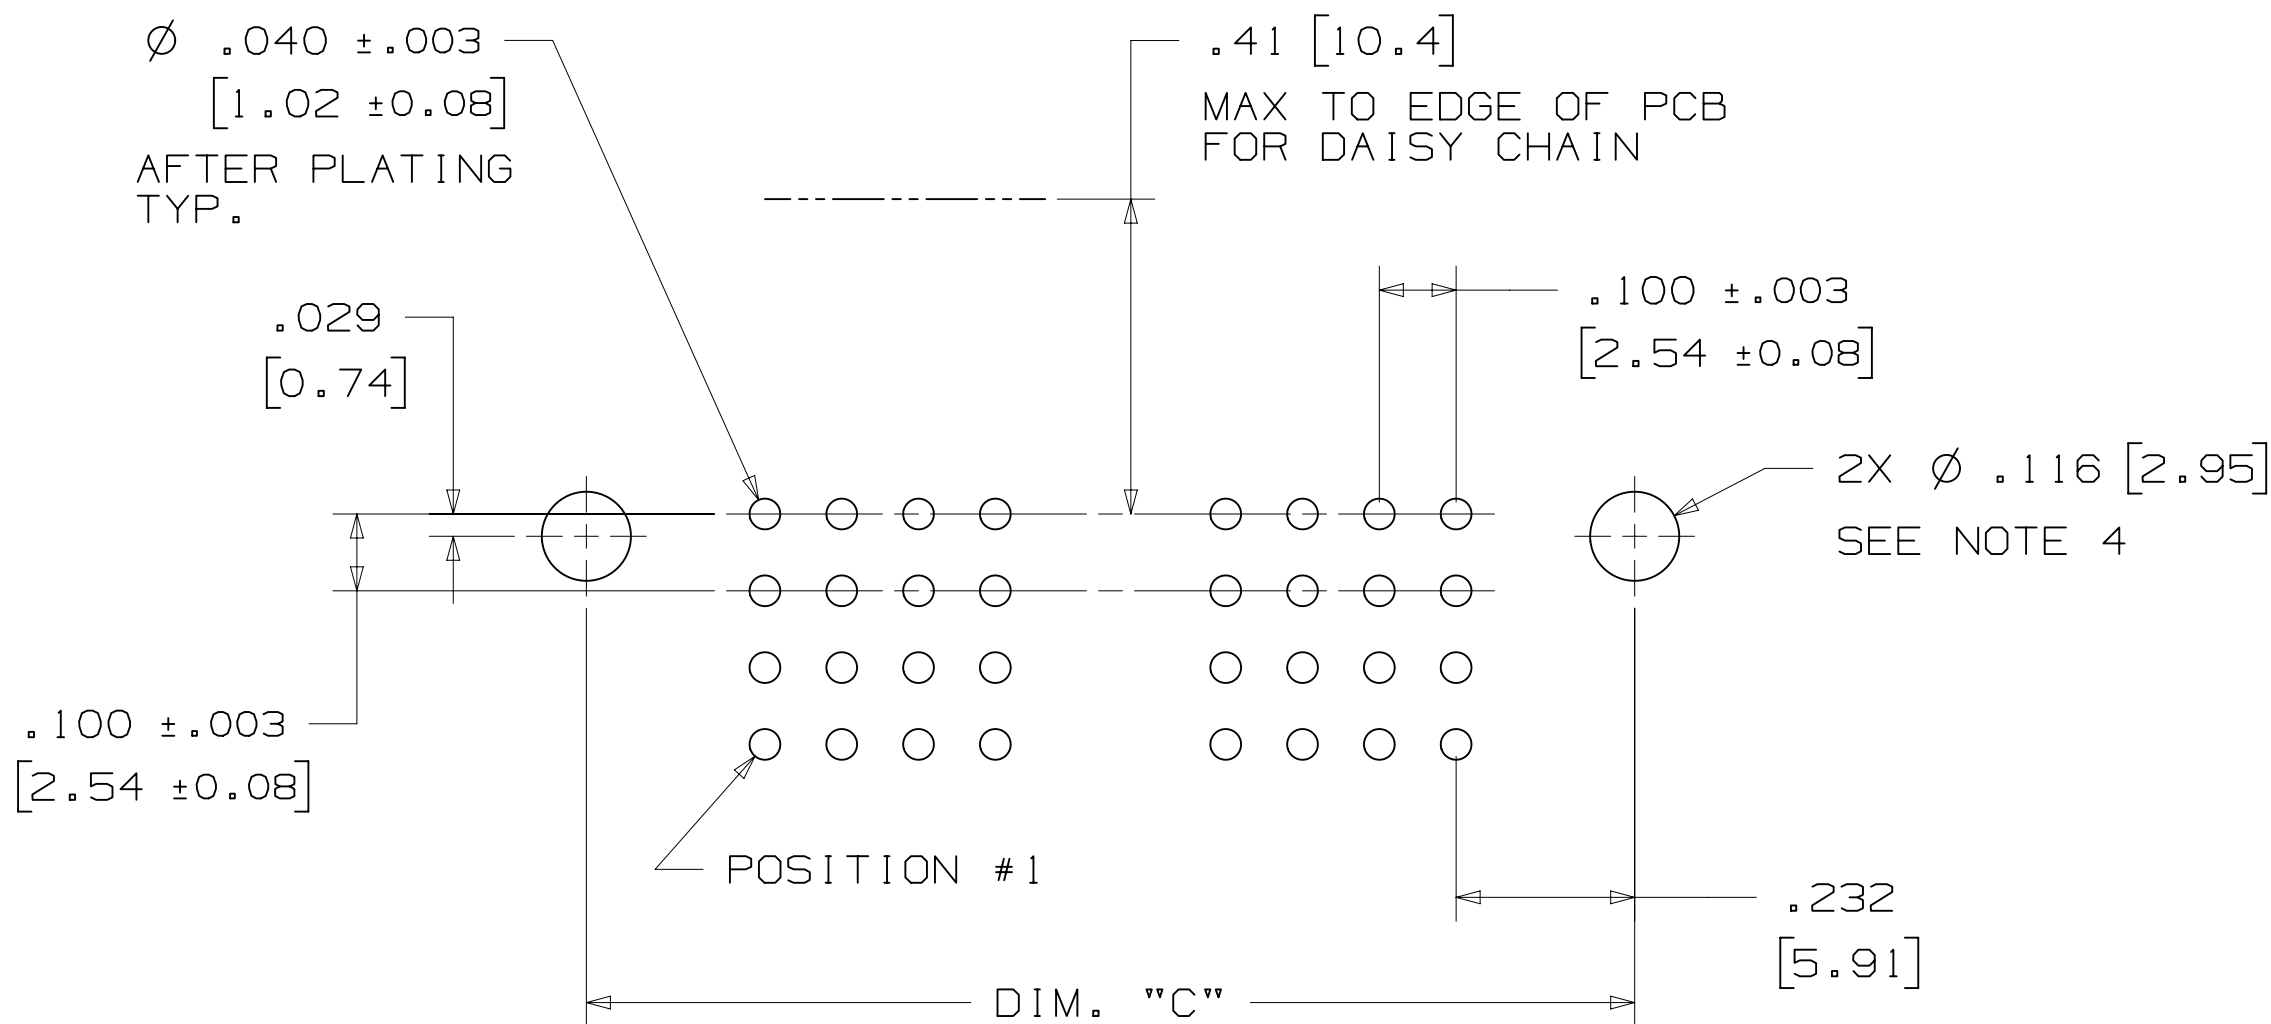

RECOMMENDED MOUNTING HOLE PATTERN

MOUNTING HARDWARE

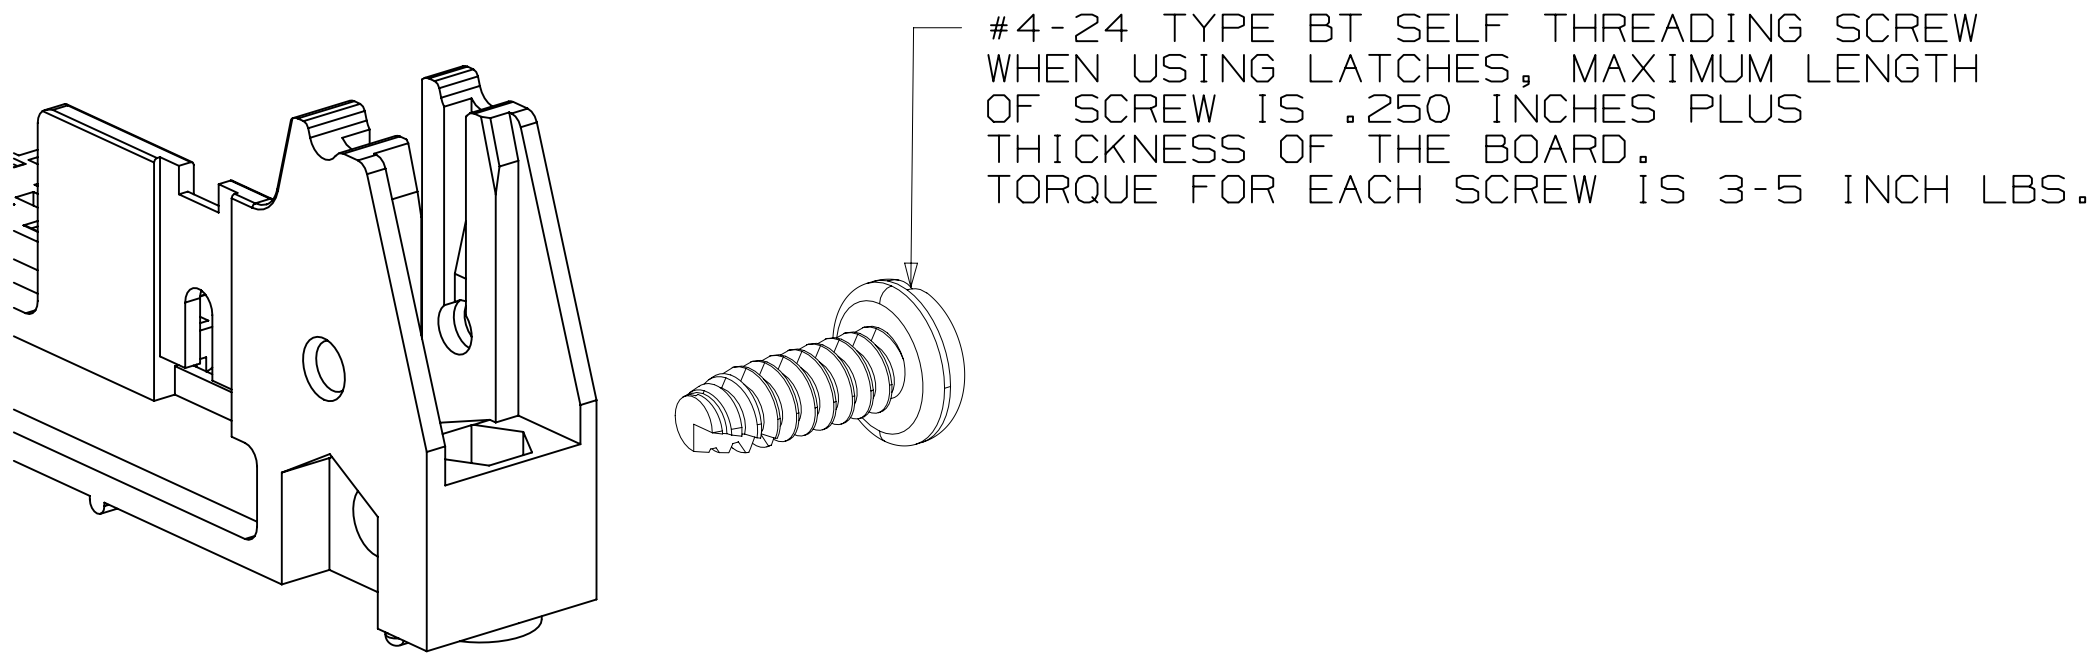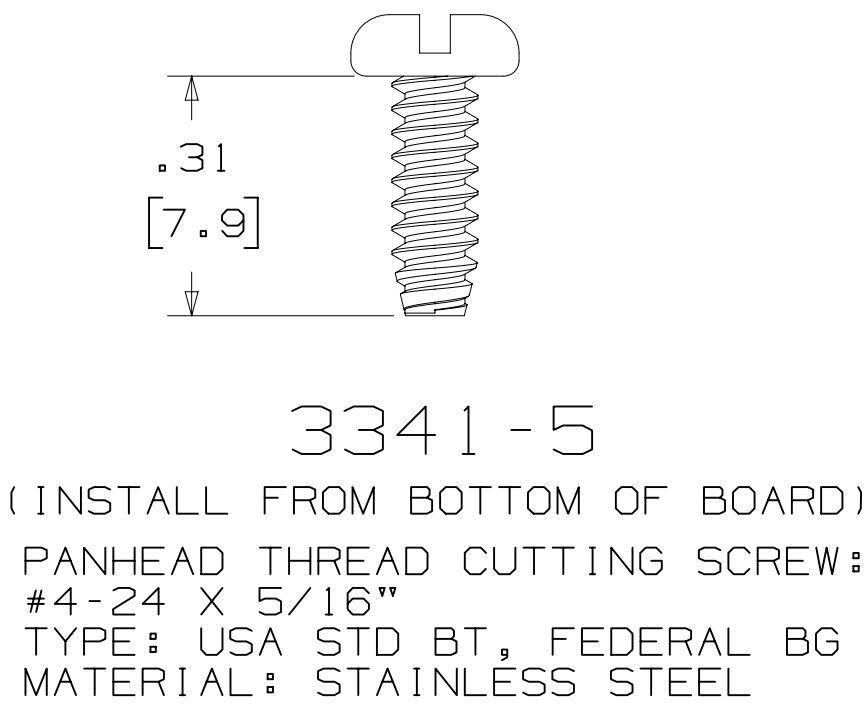


PART CUSTOMIZATION

THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.

BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.


MATERIAL	SHORT LATCH	LONG LATCH	LATCH STYLE	COLOR
HIGH TEMP. (PCT)	N3505-2B	N3505-3B	ROLL PIN	BLACK
HIGH TEMP (PPA)	N3505-30B	N3505-31B	SNAP-IN	BLACK

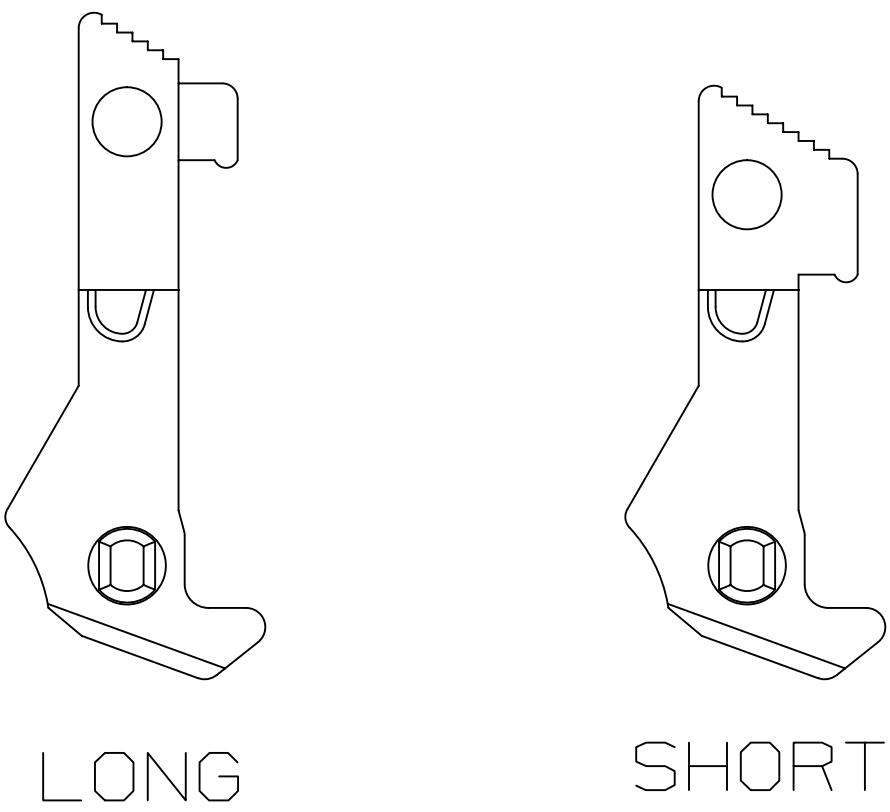

SNAP-IN LATCHES

NOTE:
SNAP-IN LATCHES CAN ONLY BE ORDERED SEPARATELY AND ARE THE CUSTOMERS RESPONSIBILITY TO INSTALL.


POLARIZING POST

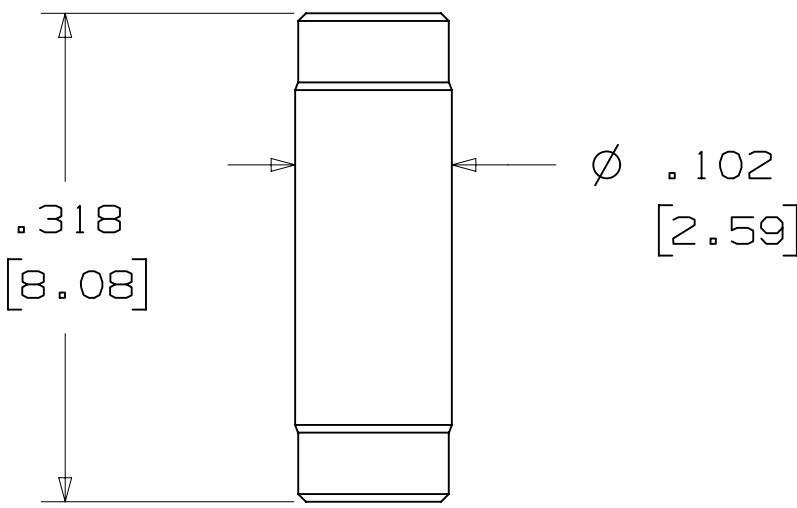

3M PART NO.	MATERIAL	COLOR
3201-4	LCP	BLACK

NOTE:
INSERT POST INTO ONE MOUNTING
HARDWARE HOLE ON BOTTOM OF HEADER.
SET POST TO PROTRUDE .115 [2.92]

POLARIZING KEY

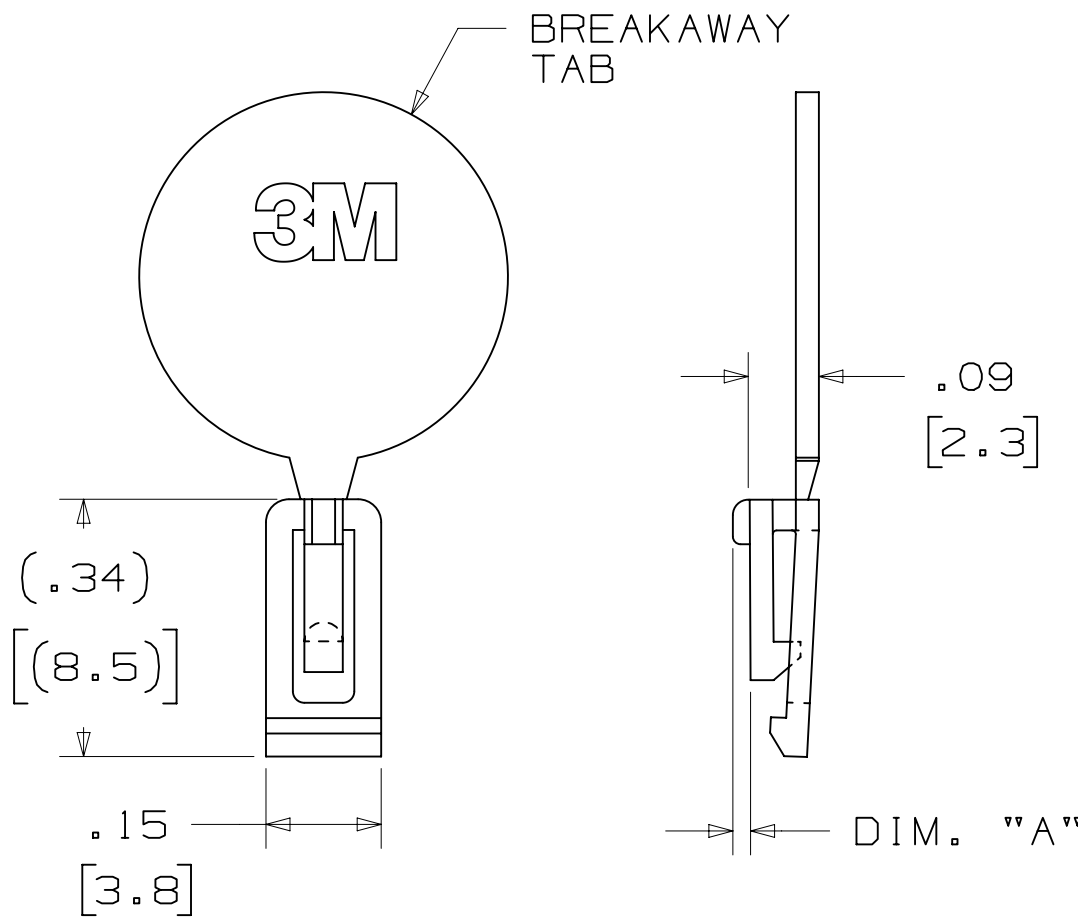

3M PART NO.	MATERIAL	COLOR	DIM. "A"
N3518	LCP	BLACK	.02

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO
ADHERE KEYS.

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
Interconnect Solutions	EMSD	DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	INCHES .00 ±.01 .000 ±.005 .0000 ±.0000	MILLIMETERS 0 ±.3 .00 ±.13 .000 ±.000
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	MAX SURFACE ROUGHNESS	1.0 SURFACES	MARKED ONLY	ANGLES	
3M	3M Center St. Paul, MN 55144	© 3M COPYRIGHT 2015	This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	TITLE	HEADER, 3-WALL, CONDO, .100 X .100 LATCH/EJECTOR, RA	
CAGE NUMBER	SIZE	DRAWING NO.	REV.			
D	78-5100-0773-1	K				
MODEL	3000 SERIES	DET	LISTS	YES	NO	SHT 3 OF 3