




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

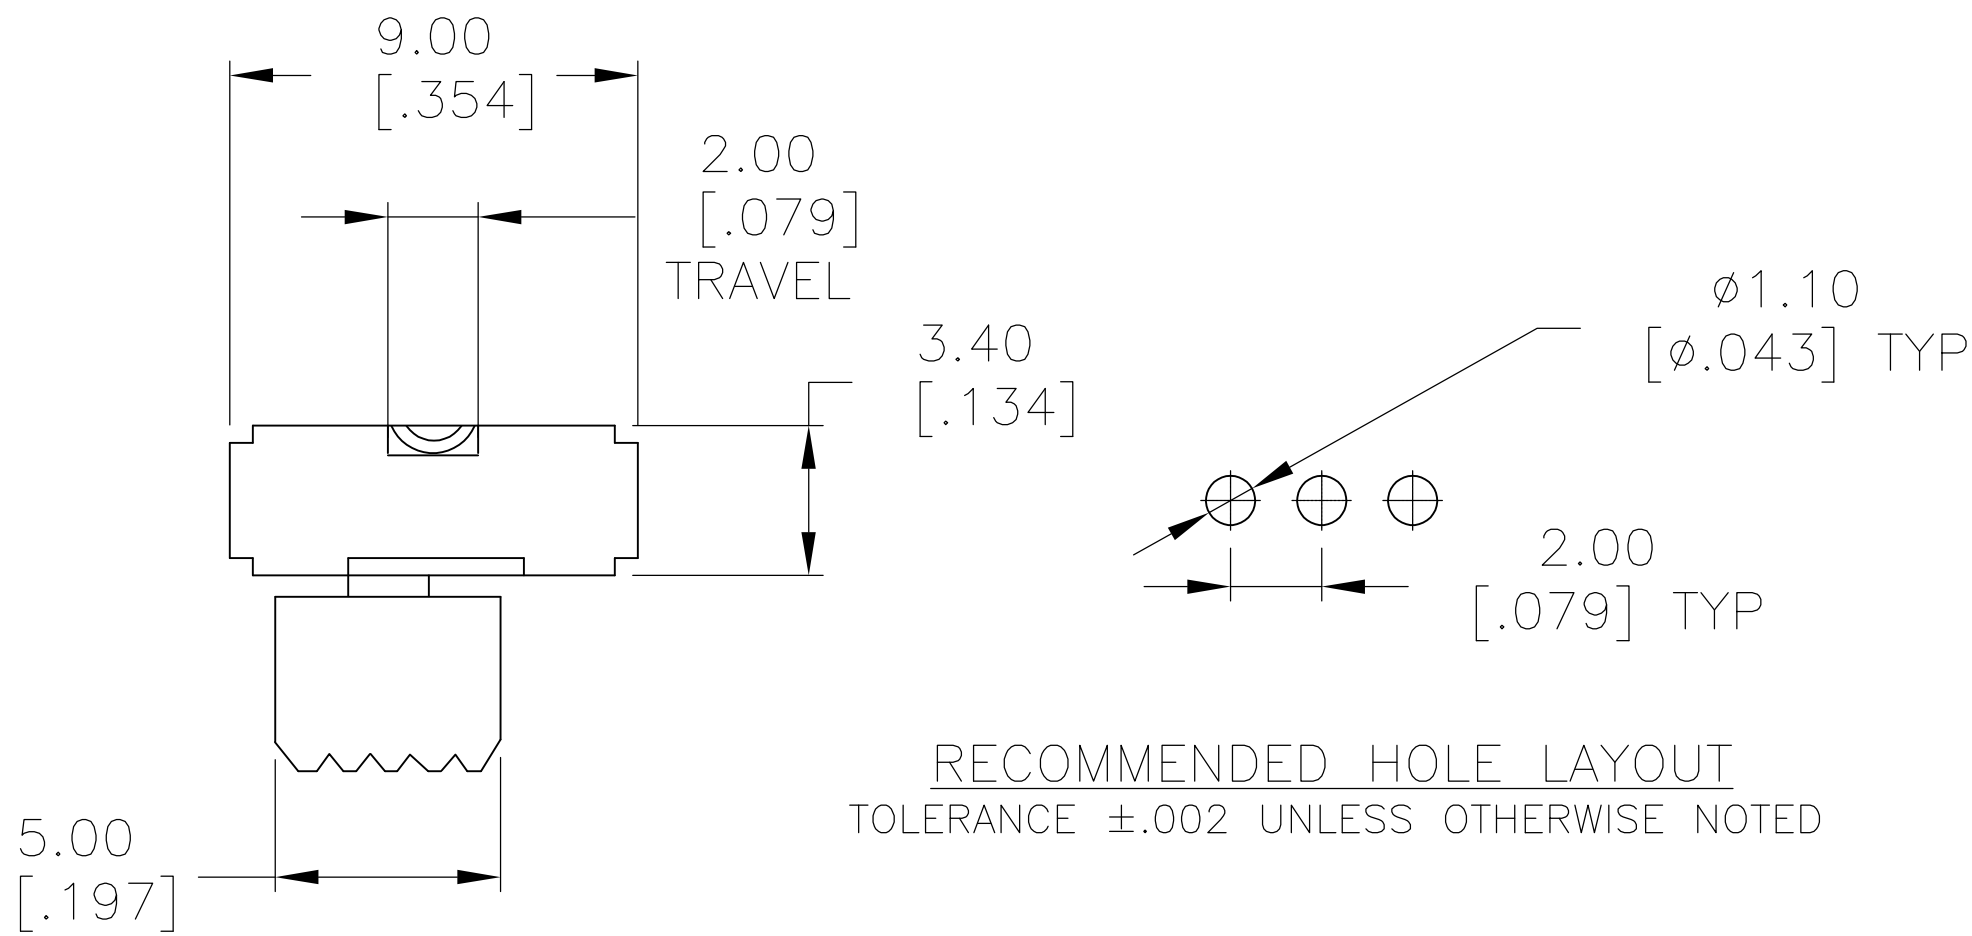

RECOMMENDED HOLE LAYOUT
TOLERANCE ±.002 UNLESS OTHERWISE NOTED

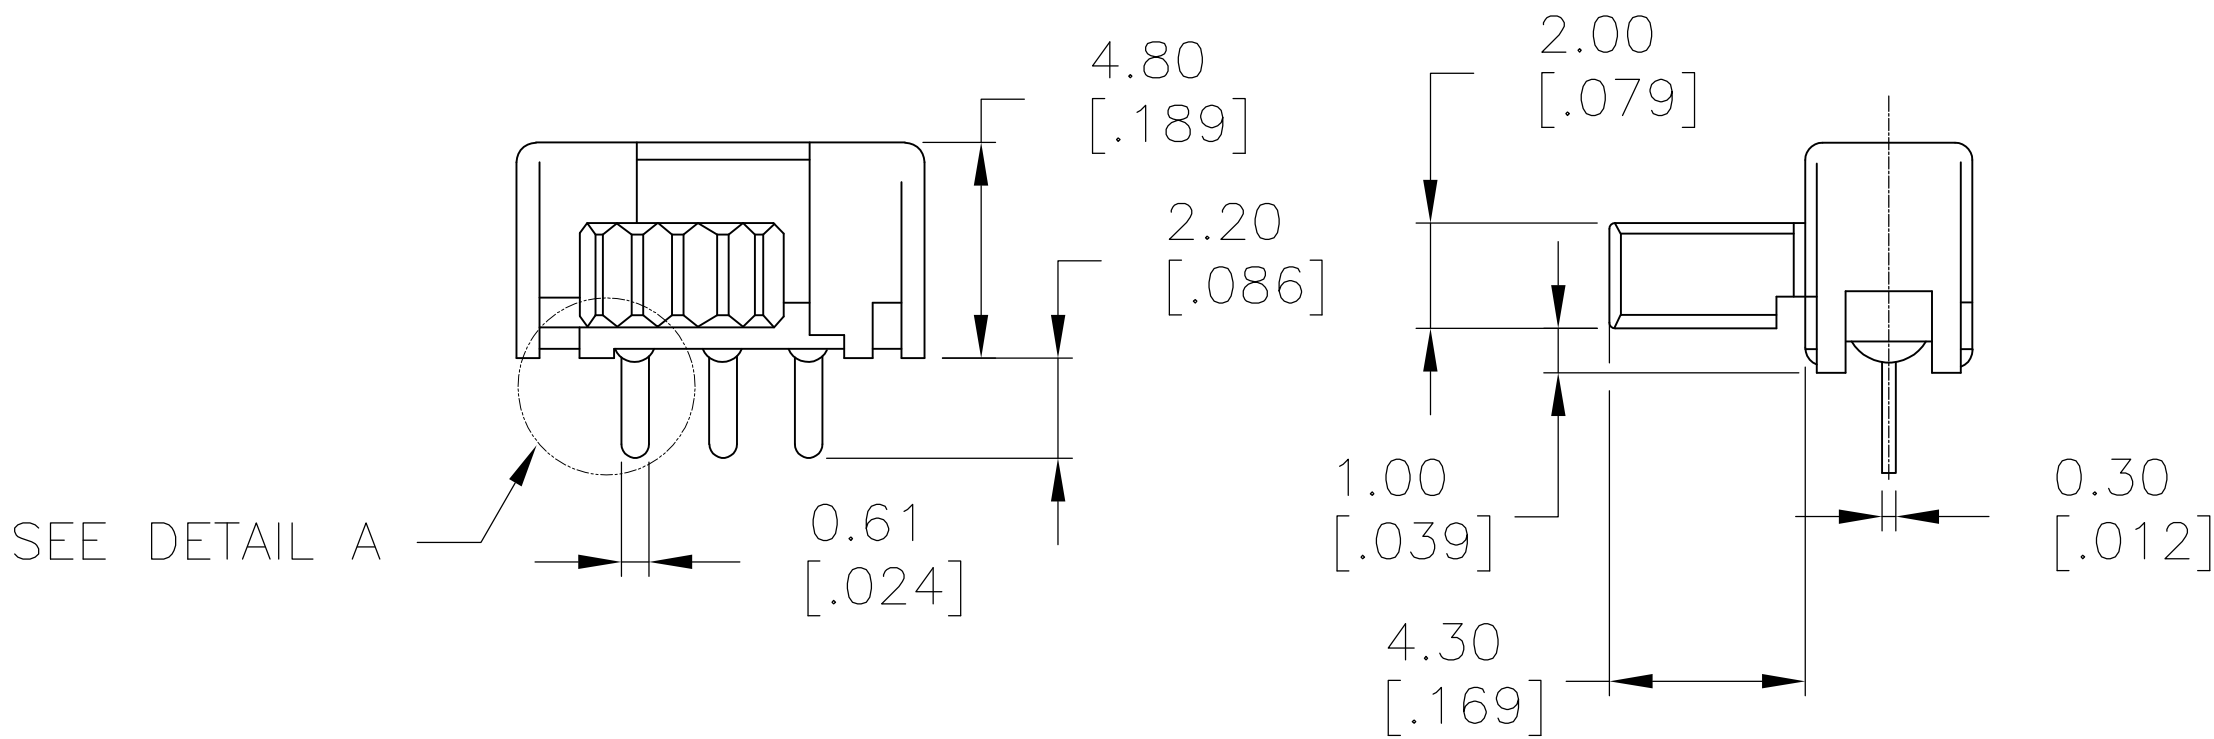


SSB -12R



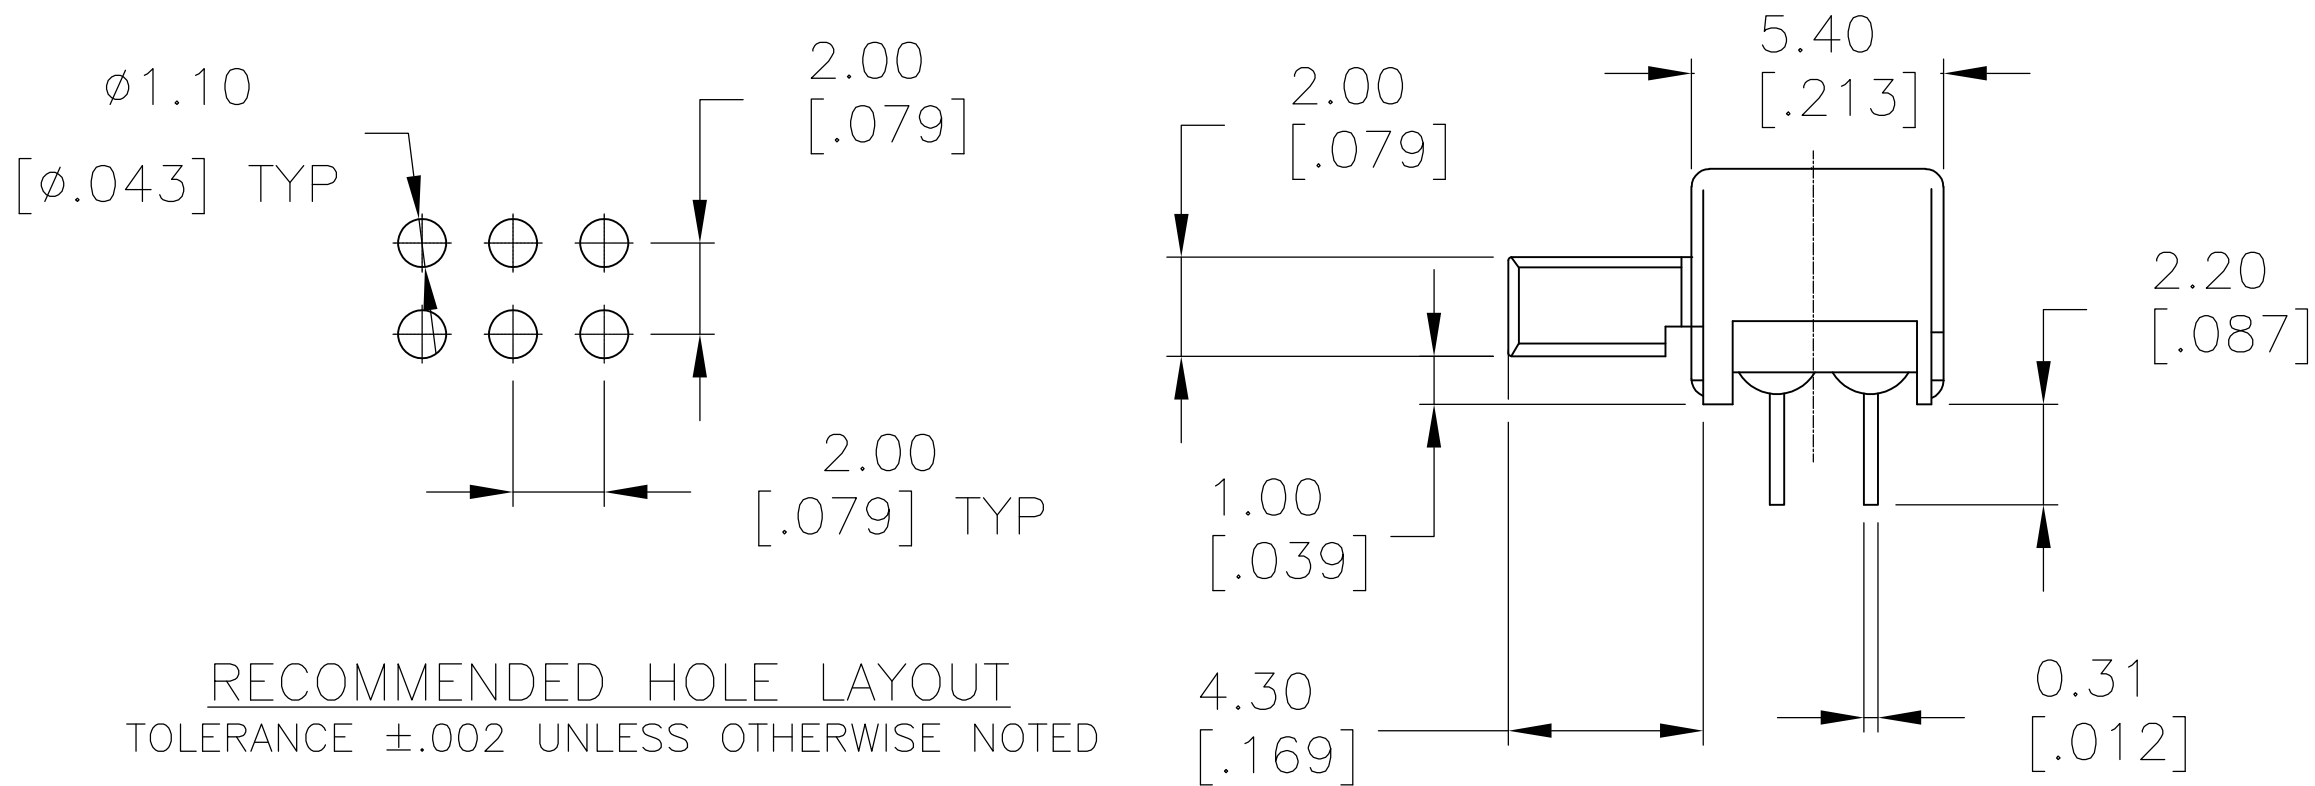


RECOMMENDED HOLE LAYOUT
TOLERANCE ±.002 UNLESS OTHERWISE NOTED

SSB - 22R

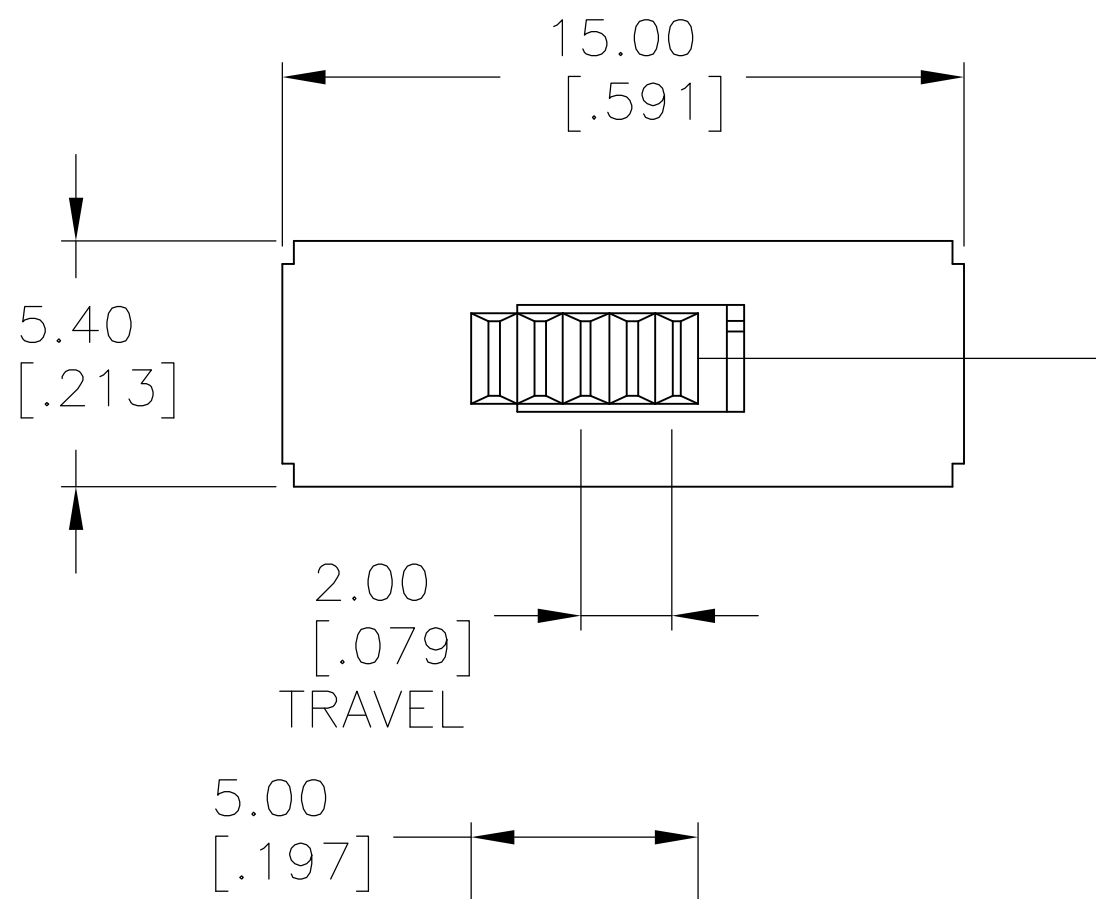

SSB-42

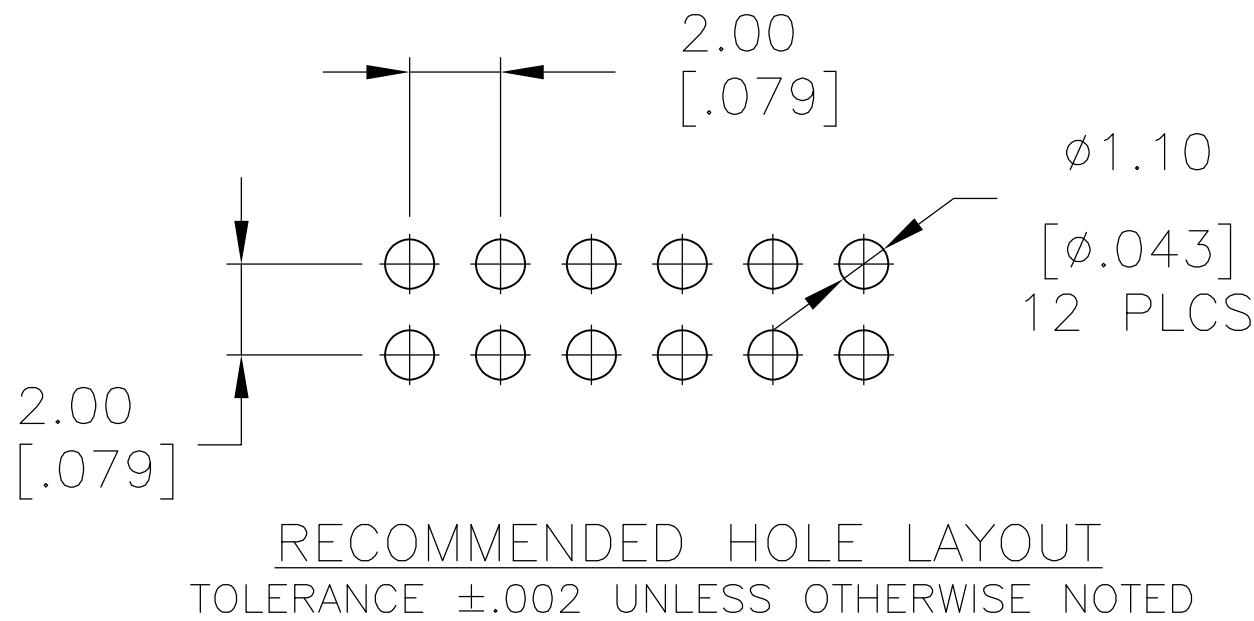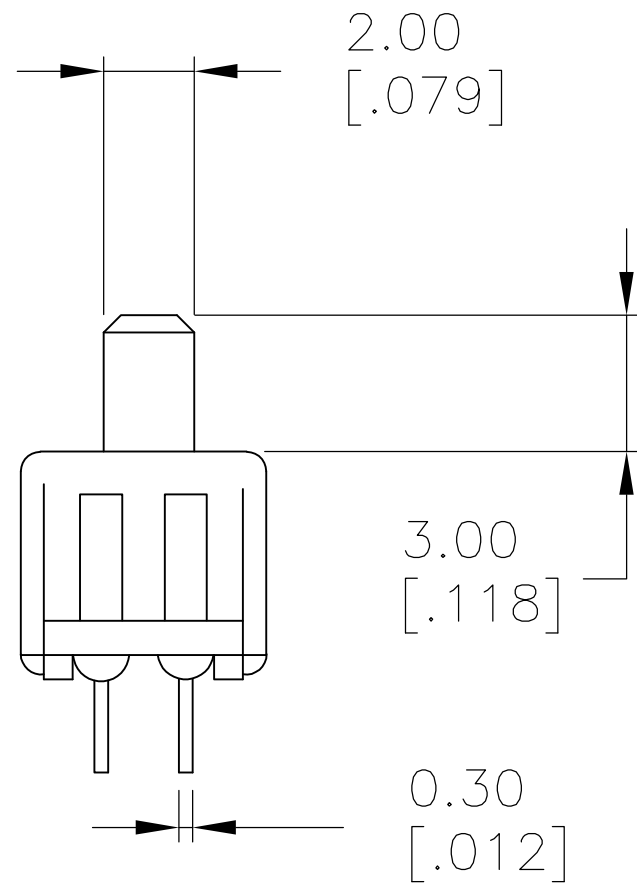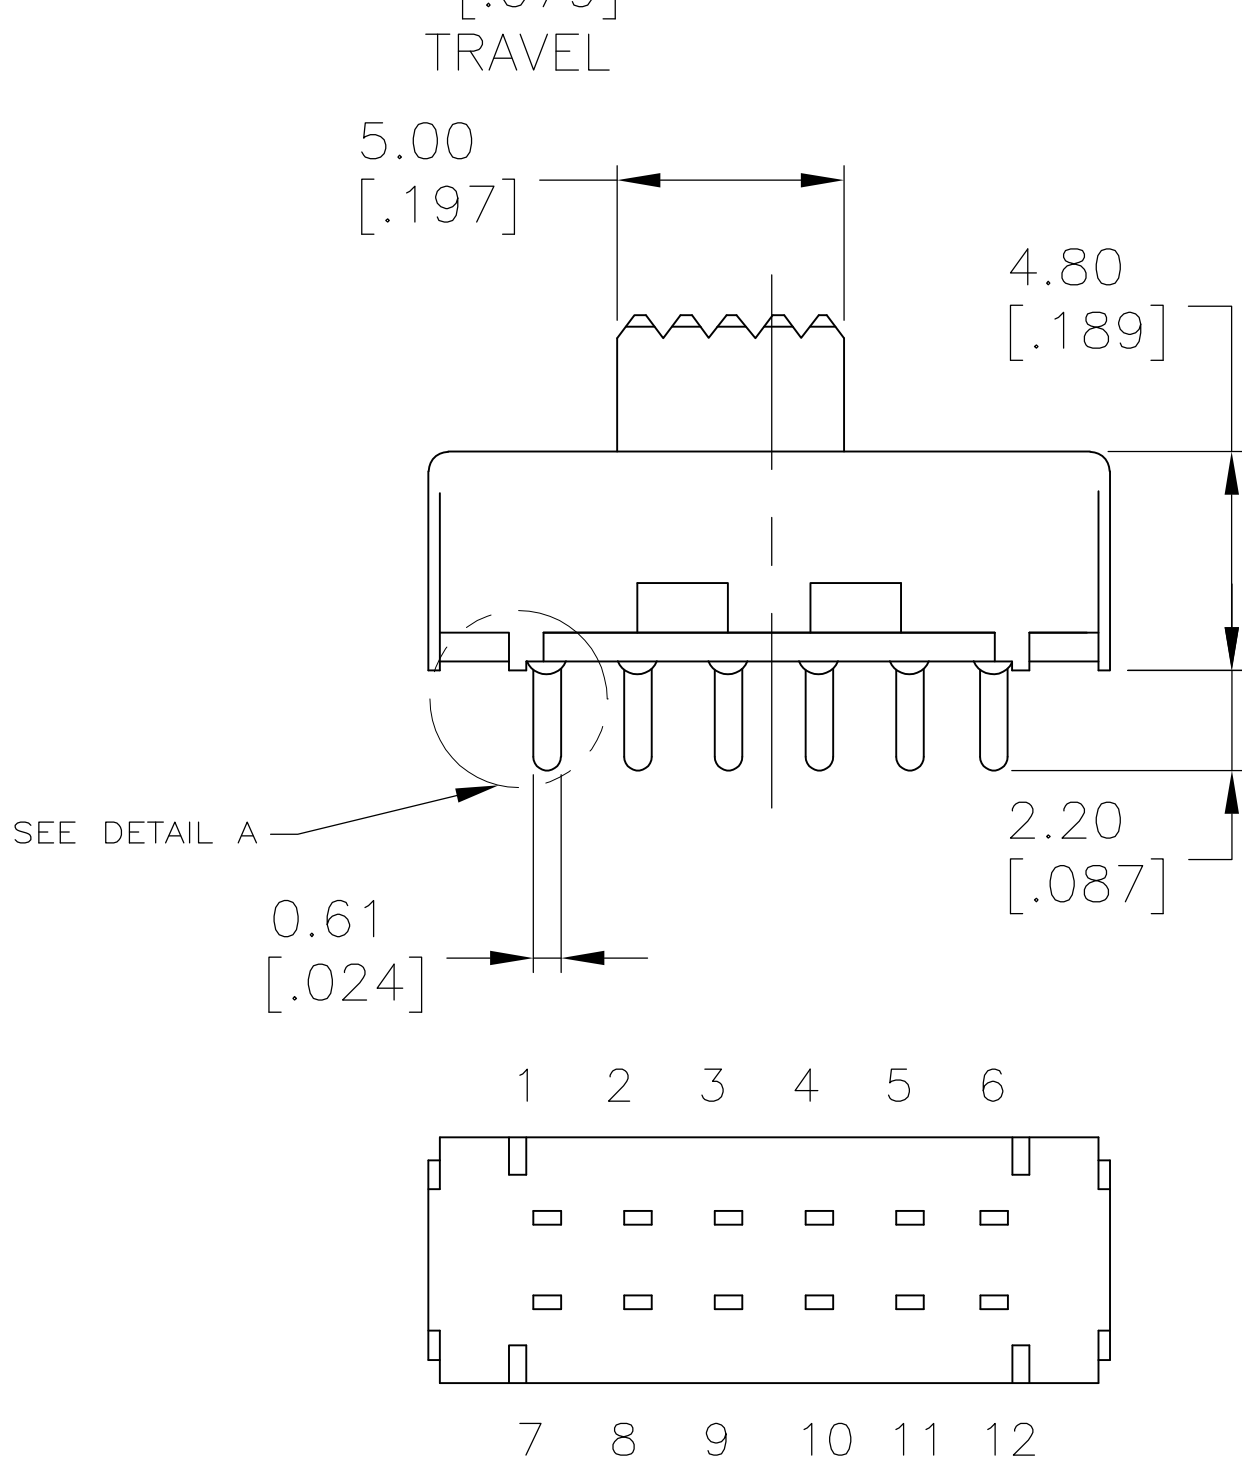

RECOMMENDED HOLE LAYOUT
TOLERANCE ±.002 UNLESS OTHERWISE NOTED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA	25SEP05	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK —	—	NAME SLIDE SWITCH, LOW PROFILE SSB SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	—	PRODUCT SPEC —	
0 PLC ± —		APPLICATION SPEC —		SIZE A1	
1 PLC ± —		WEIGHT —		CAGE CODE 2-1437575-3	
2 PLC ± 0.25[.010]		CUSTOMER DRAWING		RESTRICTED TO —	
3 PLC ± —		SCALE 6:1		SHEET 2	
4 PLC ± —		REV C			
ANGLES ± 1°					
FINISH —					