

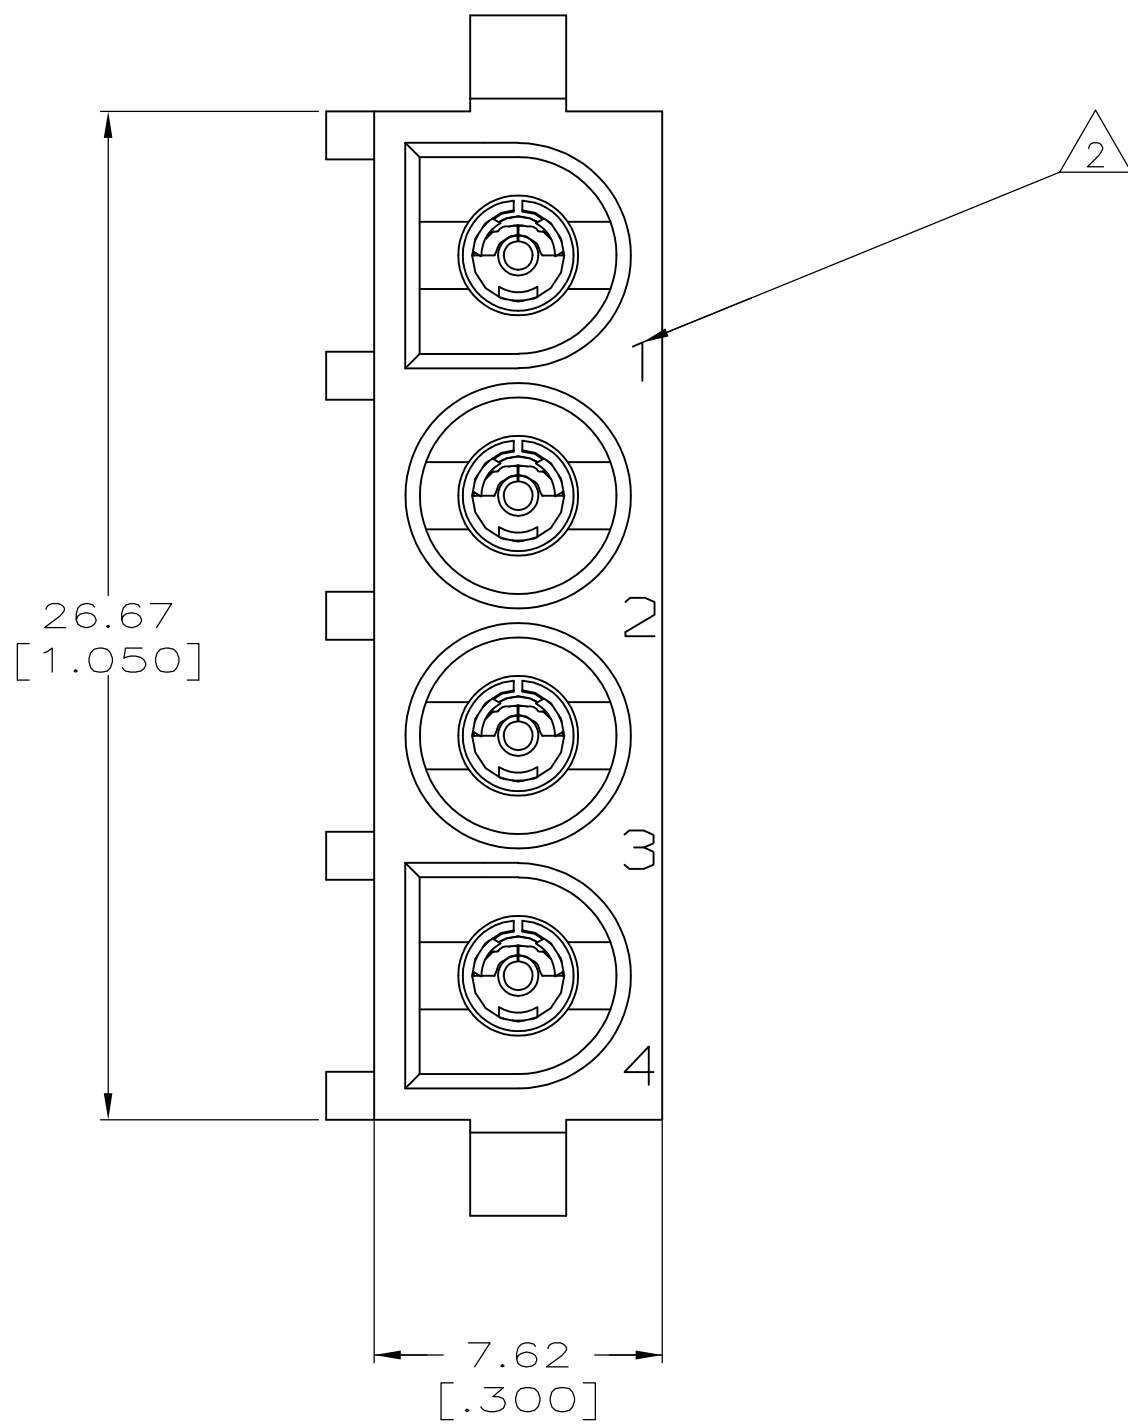
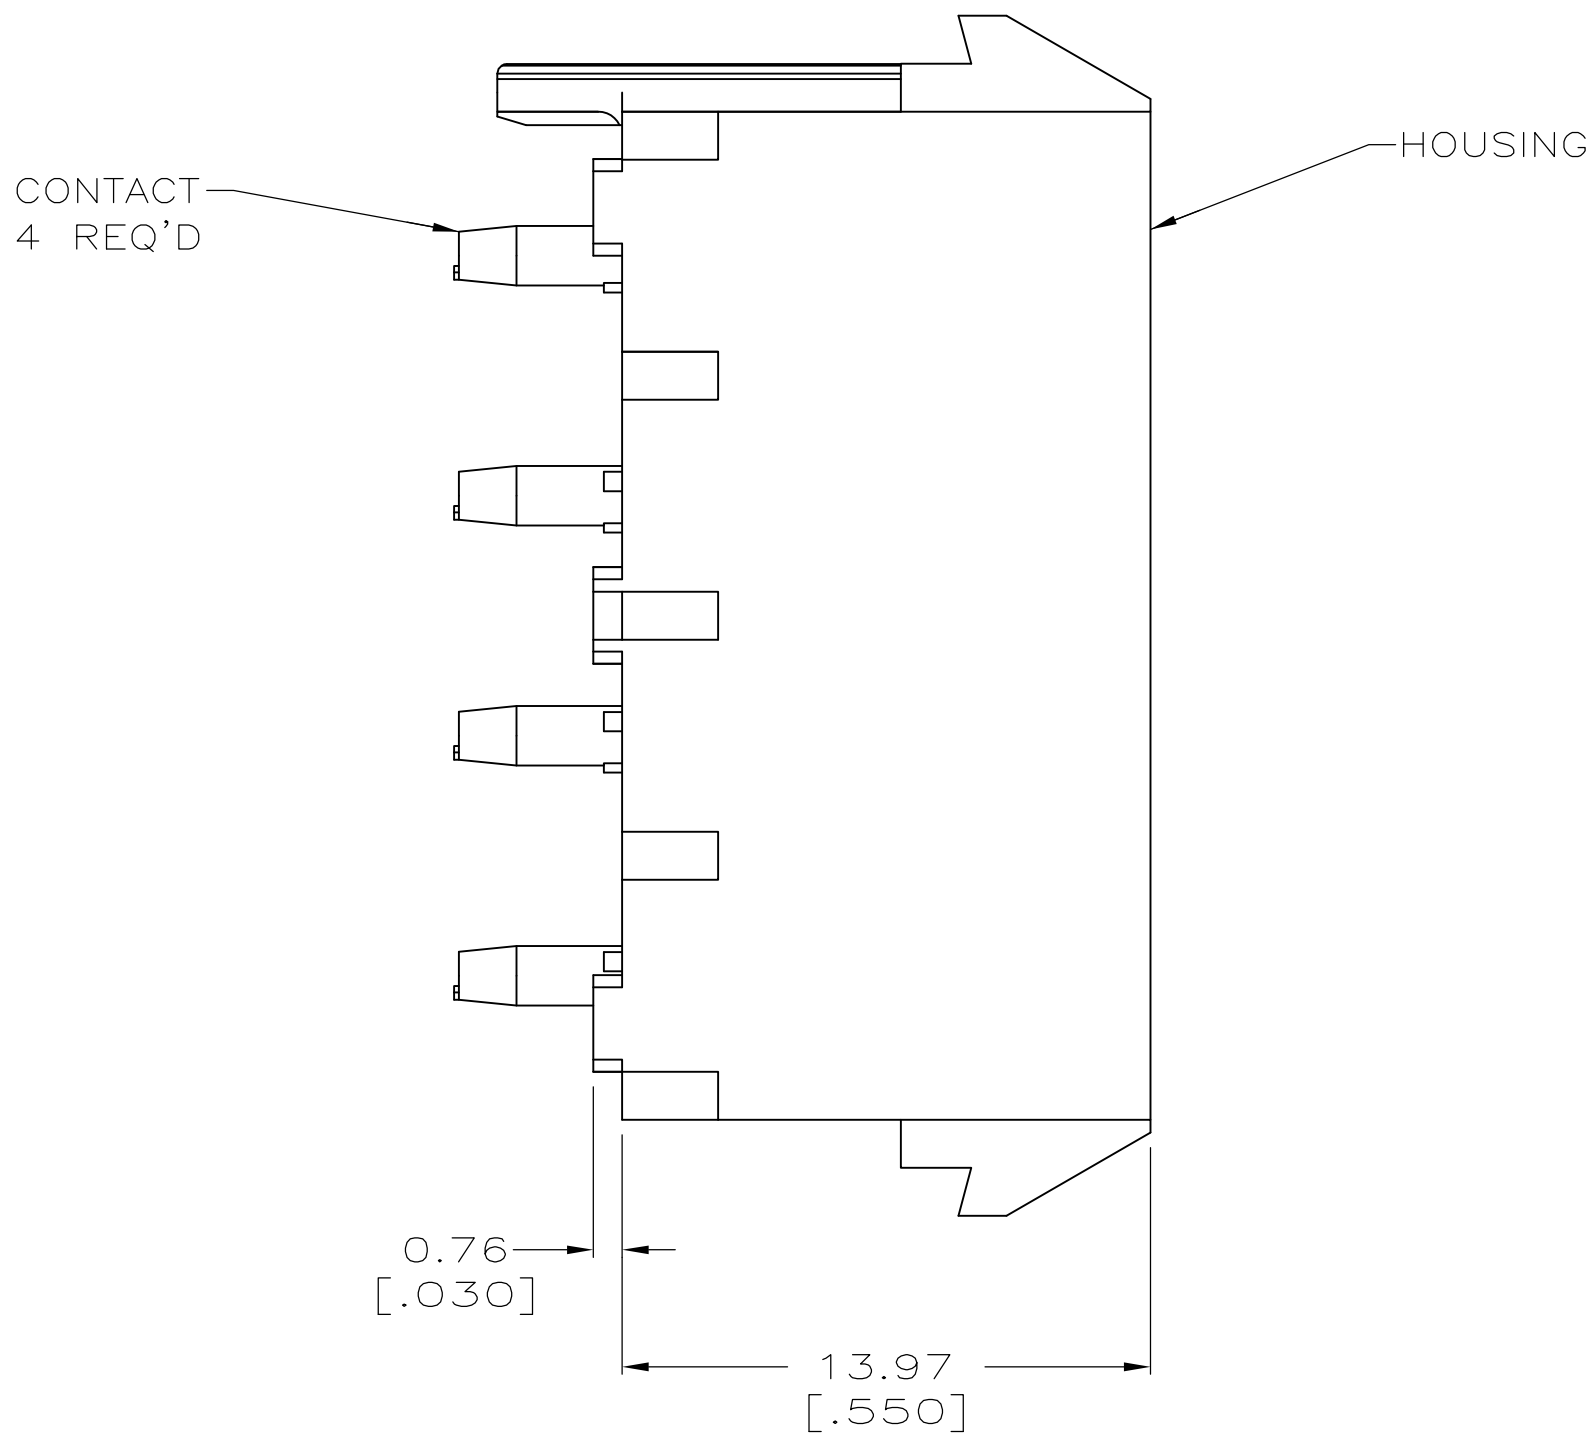





LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	00					
		B2		REVISED PER ECR-12-011660	06FEB13	KH

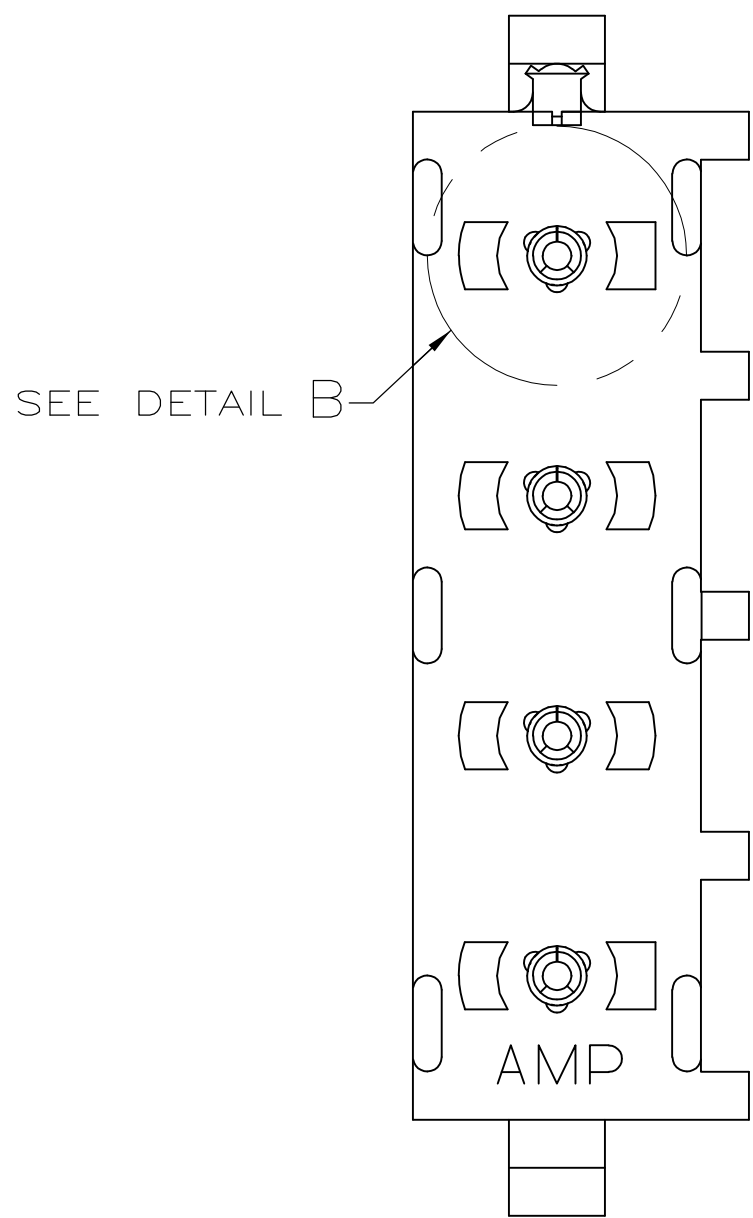

- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 - 0.00178 [.000050 - .000070] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 5 DRAIN HOLES LOCATED AS SHOWN. OPTIONAL CONSTRUCTION- ALL DRAIN HOLES LOCATED 90° AS SHOWN IN DETAIL A.
- 6 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 - 0.00178 [.000050 - .000070] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 7 SUPERSEDED BY 794783-3

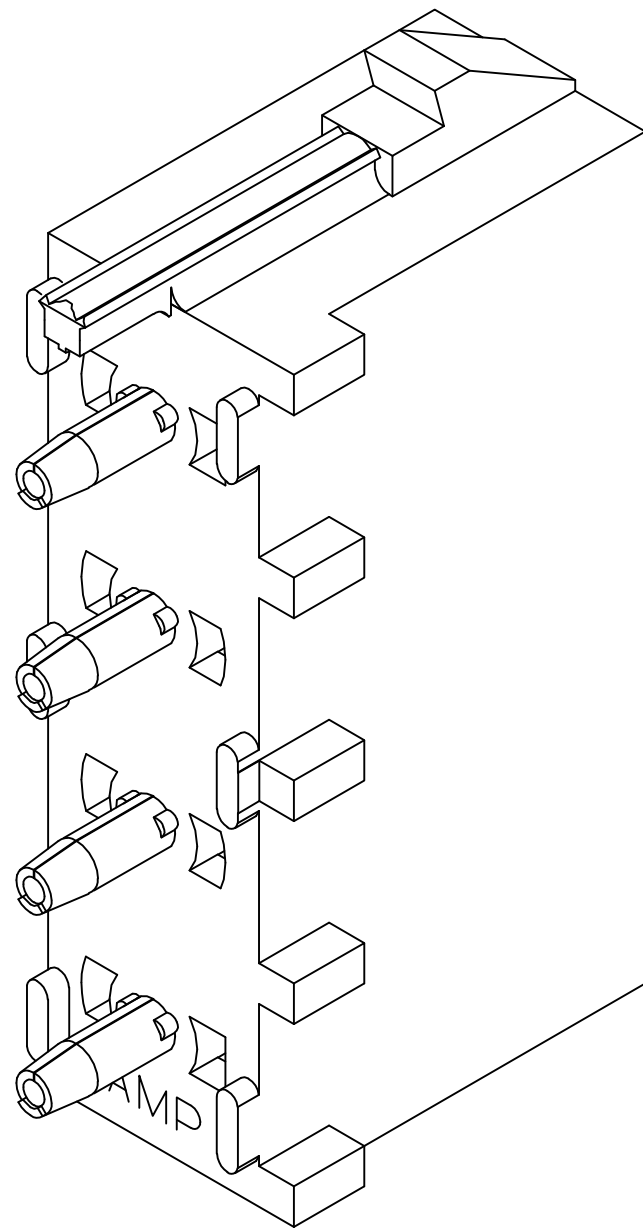

3-DIMENSIONAL MODEL
NTS

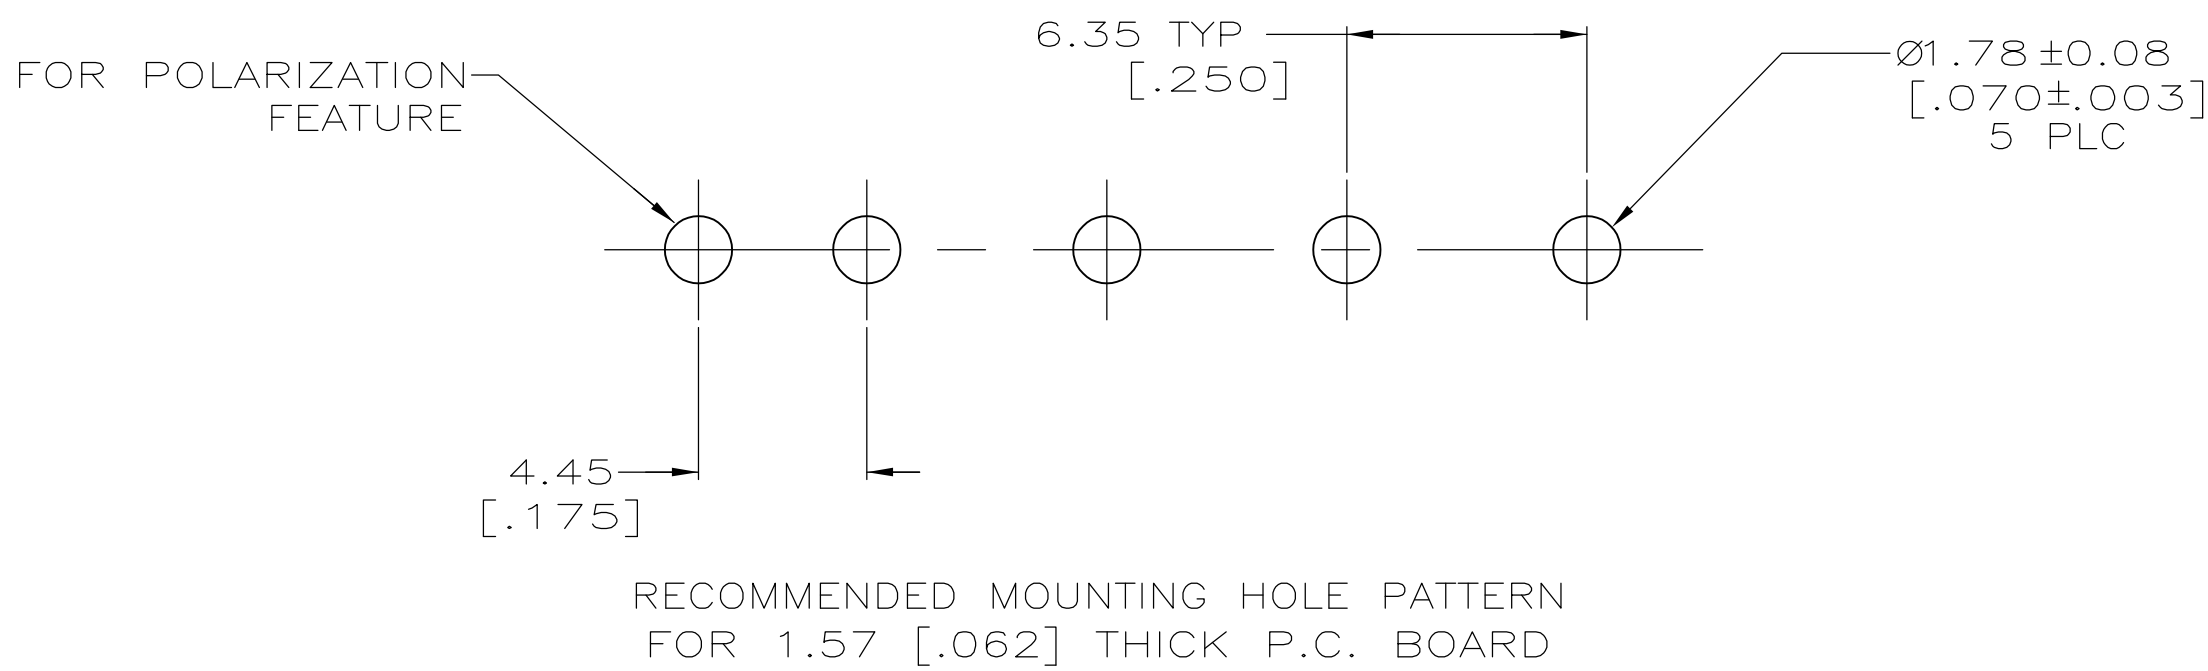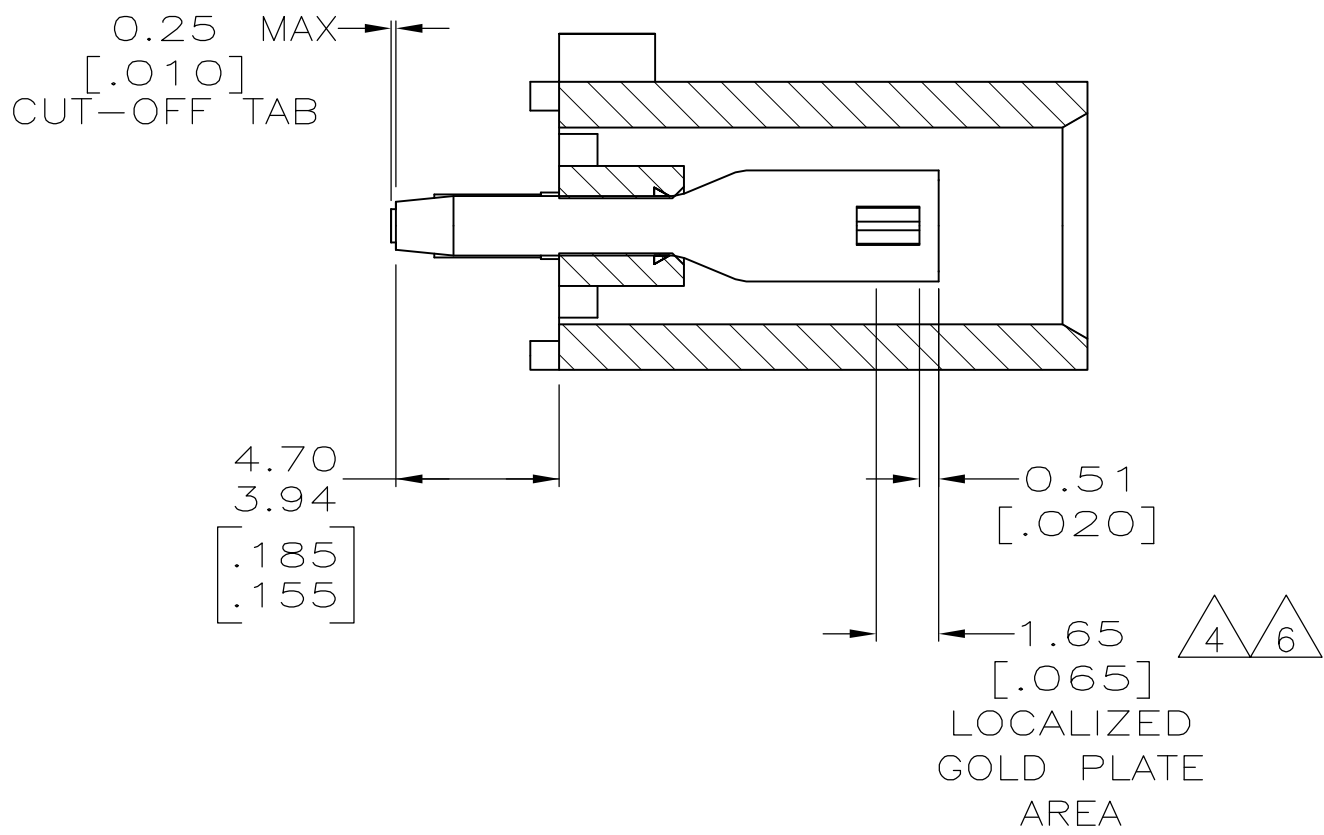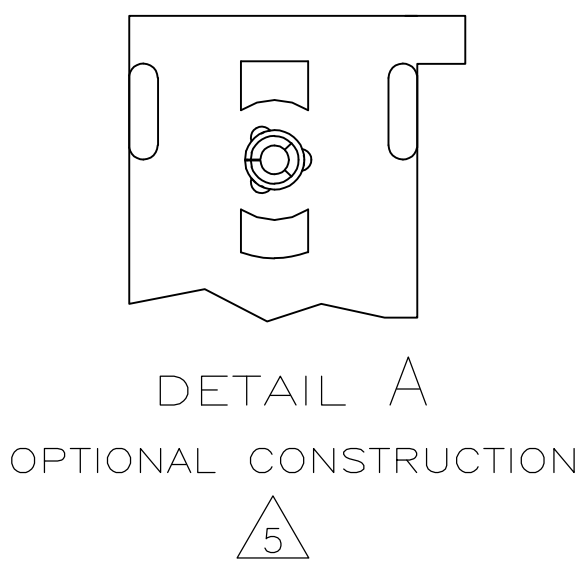

PHOSPHOR BRONZE, GOLD	NYLON,UL94V-0,BLACK	794783-3
PHOSPHOR BRONZE, GOLD	NYLON,UL94V-0,BLACK	794783-2
PHOSPHOR BRONZE, PRE-TIN	NYLON,UL94V-0,BLACK	794783-1
CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. McEACHIN 19-JUN-2000	STE TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK K. COBLE 19-JUN-2000	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 19-JUN-2000	SOCKET HEADER ASSEMBLY, POLARIZED, 4 CIRCUIT UNIVERSAL MATE-N-LOK™		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC			
2 PLC ± 0.13 [.005]		SIZE			
3 PLC ± -		CAGE CODE			
4 PLC ± -		DRAWING NO			
ANGLES ± ± 0°30'		RESTRICTED TO			
FINISH		A1 00779 C=794783			
MATERIAL SEE TABLE		WEIGHT —			
SEE TABLE		CUSTOMER DRAWING			
		SCALE 5:1			
		SHEET 1 OF 1			
		REV B2			