

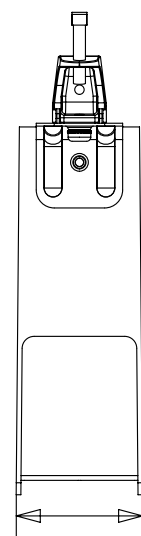


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

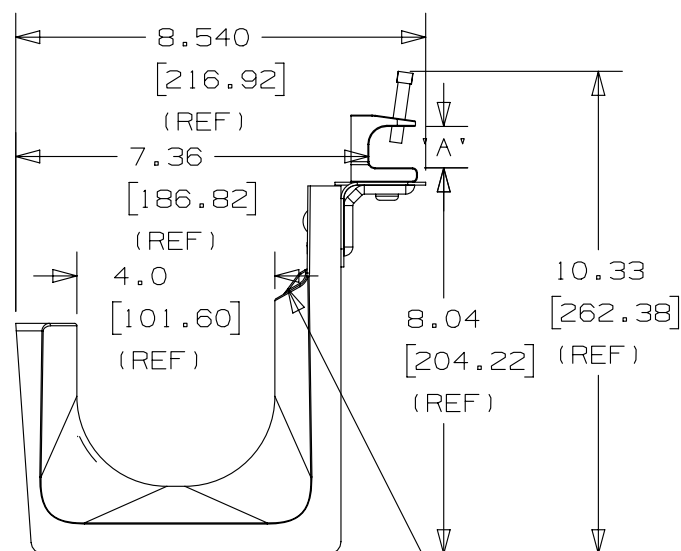

- 2.63
[66.85]
(REF)

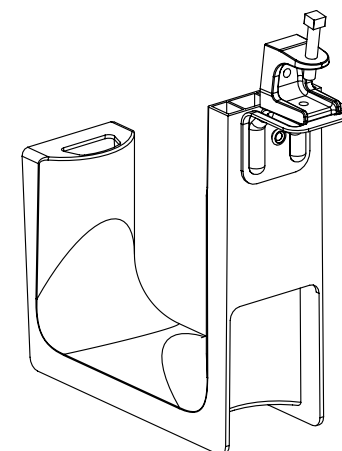


PANDUIT PART NO.	'A'	WEIGHT 10pcs lbs (g)
JP4SBC87RB- ---	0.812 - 0.912 [20.6-23.2]	7.286 (3305)

NOTES :

- NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
 2. HOOK MATERIAL: NYLON 6/6
ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL
RIVET MATERIAL: ALUMINUM
CLAMP MATERIAL: PLATED IRON
BOLT/WASHER MATERIAL: ZINC PLATED STEEL
 3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 4" (19.05) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 50 lbs.
 4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
 5. PRODUCT MARKINGS:

ULC logo and statement:
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH
SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
ULC logo and statement:
"IN ACCORDANCE WITH CAN/ULC S-102.2-10 IN SINGLE UNITS
, MINIMUM 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=35."

OO	2/4/2013	DBLA	CLW	KLN	INITIAL RELEASE	GAECN00427
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				
J-PRO J-HOOK WITH 360° SCREW-ON BEAM CLAMP (JP4SBC87RB-___)				
CUSTOMER DRAWING				
ITEM REVISION NAME				
121031AT/00				
DATASET FILE NAME				
121031AT_DC_C11039/00A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			MATERIAL: SEE NOTE 2	
 THIRD ANGLE PROJECTION			DRAWING NUMBER: C11039	
DRAWN BY	DATE	CHK	SCALE	SIZE
DBLA	2/4/2013	KLN	NONE	SHT 1 OF 1
				A