
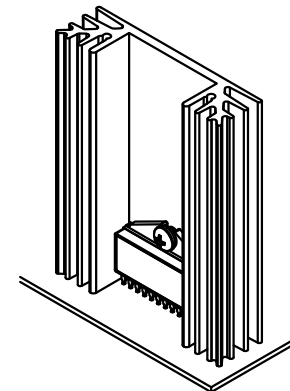
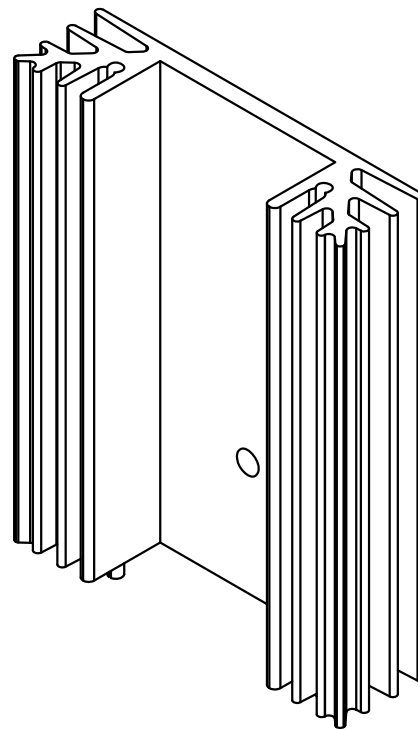


4

3

2

1

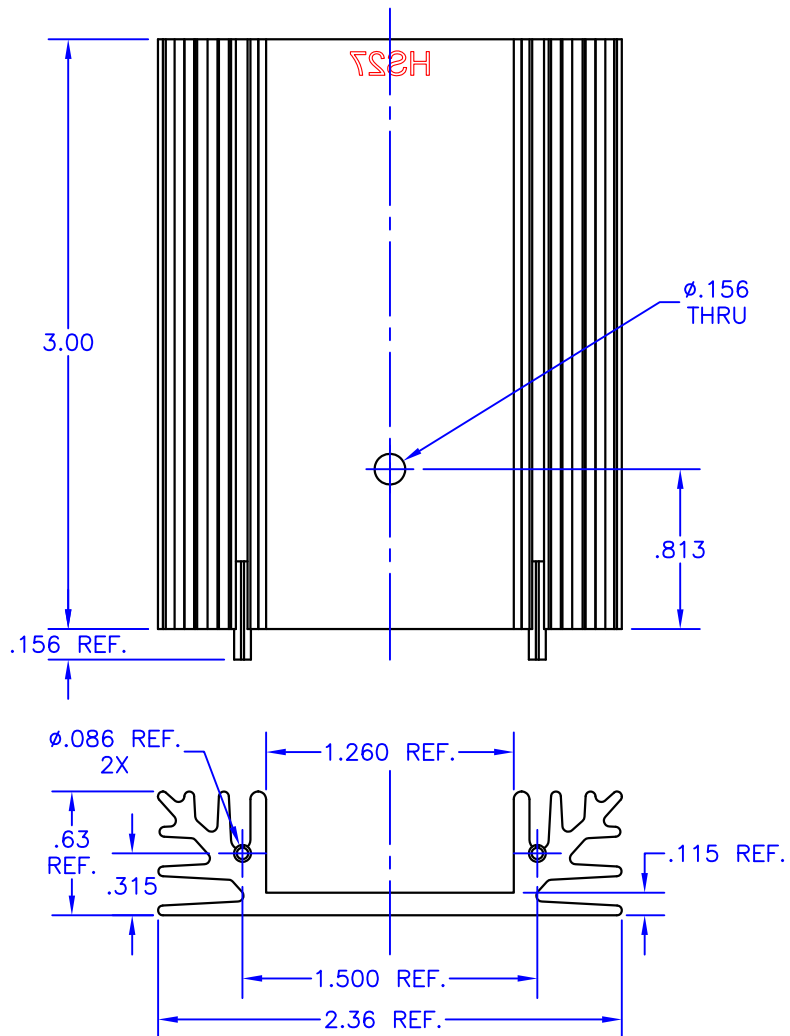

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: 6063-T5 aluminum (AAVID Thermalloy #6374B with custom length and hole.)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 2.5 oz. [71g]

TOLERANCES - UNLESS
OTHERWISE SPECIFIED

.XX = $\pm .05$ [.002]
.XXX = $\pm .005$ [.0002]
ANG. = $\pm 2^\circ$



TITLE:

POWER SIP HEATSINK

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M

DRAWN BY:

P.ECK

DCA:

12436

SHL

OF

1

1

MODEL:

HS27

FILENAME:

HS27

REV:

C

DATE:

14NOV12

4

3

2

1