

## 74AC240 • 74ACT240

### Octal Buffer/Line Driver with 3-STATE Outputs

#### General Description

The AC/ACT240 is an octal buffer and line driver designed to be employed as a memory address driver, clock driver and bus oriented transmitter or receiver which provides improved PC board density.

#### Features


- $I_{CC}$  and  $I_{OZ}$  reduced by 50%
- Inverting 3-STATE outputs drive bus lines or buffer memory address registers
- Outputs source/sink 24 mA
- ACT240 has TTL-compatible inputs

#### Ordering Code:

| Order Number | Package Number | Package Description                                                             |
|--------------|----------------|---------------------------------------------------------------------------------|
| 74AC240SC    | M20B           | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body |
| 74AC240SJ    | M20D           | 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                   |
| 74AC240MTC   | MTC20          | 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide     |
| 74AC240PC    | N20A           | 20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide          |
| 74ACT240SC   | M20B           | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body |
| 74ACT240SJ   | M20D           | 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                   |
| 74ACT240MTC  | MTC20          | 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide     |
| 74ACT240PC   | N20A           | 20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide          |

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

#### Logic Symbol



#### Pin Descriptions

| Pin Names                          | Description                  |
|------------------------------------|------------------------------|
| $\overline{OE}_1, \overline{OE}_2$ | 3-STATE Output Enable Inputs |
| $I_0-I_7$                          | Inputs                       |
| $\overline{O}_0-\overline{O}_7$    | Outputs                      |


#### Truth Tables

| Inputs            |       | Outputs<br>(Pins 12, 14, 16, 18) |
|-------------------|-------|----------------------------------|
| $\overline{OE}_1$ | $I_n$ |                                  |
| L                 | L     | H                                |
| L                 | H     | L                                |
| H                 | X     | Z                                |

| Inputs            |       | Outputs<br>(Pins 3, 5, 7, 9) |
|-------------------|-------|------------------------------|
| $\overline{OE}_2$ | $I_n$ |                              |
| L                 | L     | H                            |
| L                 | H     | L                            |
| H                 | X     | Z                            |

H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Immaterial  
Z = High Impedance

#### Connection Diagram



FACT™ is a trademark of Fairchild Semiconductor Corporation.

**Absolute Maximum Ratings**(Note 1)

|                                          |                          |
|------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )              | -0.5V to +7.0V           |
| DC Input Diode Current ( $I_{IK}$ )      |                          |
| $V_I = -0.5V$                            | -20 mA                   |
| $V_I = V_{CC} + 0.5V$                    | +20 mA                   |
| DC Input Voltage ( $V_I$ )               | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Diode Current ( $I_{OK}$ )     |                          |
| $V_O = -0.5V$                            | -20 mA                   |
| $V_O = V_{CC} + 0.5V$                    | +20 mA                   |
| DC Output Voltage ( $V_O$ )              | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Source                         |                          |
| or Sink Current ( $I_O$ )                | $\pm 50$ mA              |
| DC $V_{CC}$ or Ground Current            |                          |
| per Output Pin ( $I_{CC}$ or $I_{GND}$ ) | $\pm 50$ mA              |
| Storage Temperature ( $T_{STG}$ )        | -65°C to +150°C          |
| Junction Temperature ( $T_J$ )           |                          |
| PDIP                                     | 140°C                    |

**Recommended Operating Conditions**

|                                                 |                |
|-------------------------------------------------|----------------|
| Supply Voltage ( $V_{CC}$ )                     |                |
| AC                                              | 2.0V to 6.0V   |
| ACT                                             | 4.5V to 5.5V   |
| Input Voltage ( $V_I$ )                         | 0V to $V_{CC}$ |
| Output Voltage ( $V_O$ )                        | 0V to $V_{CC}$ |
| Operating Temperature ( $T_A$ )                 | -40°C to +85°C |
| Minimum Input Edge Rate ( $\Delta V/\Delta t$ ) |                |
| AC Devices                                      |                |
| $V_{IN}$ from 30% to 70% of $V_{CC}$            |                |
| $V_{CC}$ @ 3.3V, 4.5V, 5.5V                     | 125 mV/ns      |
| Minimum Input Edge Rate ( $\Delta V/\Delta t$ ) |                |
| ACT Devices                                     |                |
| $V_{IN}$ from 0.8V to 2.0V                      |                |
| $V_{CC}$ @ 4.5V, 5.5V                           | 125 mV/ns      |

**Note 1:** Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of FACT™ circuits outside databook specifications.

**DC Electrical Characteristics for AC**

| Symbol                   | Parameter                            | V <sub>CC</sub><br>(V) | T <sub>A</sub> = +25°C              |                   | T <sub>A</sub> = −40°C to +85°C | Units | Conditions                                                                                                                                        |     |     |   |                          |
|--------------------------|--------------------------------------|------------------------|-------------------------------------|-------------------|---------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|---|--------------------------|
|                          |                                      |                        | Typ                                 | Guaranteed Limits |                                 |       |                                                                                                                                                   |     |     |   |                          |
| V <sub>IH</sub>          | Minimum HIGH Level<br>Input Voltage  | 3.0                    | 1.5                                 | 2.1               | 2.1                             | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> − 0.1V                                                                                              |     |     |   |                          |
|                          |                                      | 4.5                    | 2.25                                | 3.15              | 3.15                            |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | 5.5                    | 2.75                                | 3.85              | 3.85                            |       |                                                                                                                                                   |     |     |   |                          |
| V <sub>IL</sub>          | Maximum LOW Level<br>Input Voltage   | 3.0                    | 1.5                                 | 0.9               | 0.9                             | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> − 0.1V                                                                                              |     |     |   |                          |
|                          |                                      | 4.5                    | 2.25                                | 1.35              | 1.35                            |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | 5.5                    | 2.75                                | 1.65              | 1.65                            |       |                                                                                                                                                   |     |     |   |                          |
| V <sub>OH</sub>          | Minimum HIGH Level<br>Output Voltage | 3.0                    | 2.99                                | 2.9               | 2.9                             | V     | I <sub>OUT</sub> = −50 μA                                                                                                                         |     |     |   |                          |
|                          |                                      | 4.5                    | 4.49                                | 4.4               | 4.4                             |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | 5.5                    | 5.49                                | 5.4               | 5.4                             |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | 3.0                    |                                     | 2.56              | 2.46                            | V     | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OH</sub> = −12 mA<br>I <sub>OH</sub> = −24 mA<br>I <sub>OH</sub> = −24 mA (Note 2) |     |     |   |                          |
|                          |                                      | 4.5                    |                                     | 3.86              | 3.76                            |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | 5.5                    |                                     | 4.86              | 4.76                            |       |                                                                                                                                                   |     |     |   |                          |
|                          |                                      | V <sub>OL</sub>        | Maximum LOW Level<br>Output Voltage | 3.0               | 0.002                           |       |                                                                                                                                                   | 0.1 | 0.1 | V | I <sub>OUT</sub> = 50 μA |
|                          |                                      |                        |                                     | 4.5               | 0.001                           |       |                                                                                                                                                   | 0.1 | 0.1 |   |                          |
| 5.5                      | 0.001                                |                        |                                     | 0.1               | 0.1                             |       |                                                                                                                                                   |     |     |   |                          |
|                          | 3.0                                  |                        |                                     | 0.36              | 0.44                            | V     | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 24 mA<br>I <sub>OL</sub> = 24 mA (Note 2)    |     |     |   |                          |
|                          | 4.5                                  |                        |                                     | 0.36              | 0.44                            |       |                                                                                                                                                   |     |     |   |                          |
|                          | 5.5                                  |                        | 0.36                                | 0.44              |                                 |       |                                                                                                                                                   |     |     |   |                          |
| I <sub>IN</sub> (Note 4) | Maximum Input Leakage Current        | 5.5                    |                                     | ± 0.1             | ± 1.0                           | μA    | V <sub>I</sub> = V <sub>CC</sub> , GND                                                                                                            |     |     |   |                          |
| I <sub>OZ</sub>          | Maximum 3-STATE<br>Leakage Current   | 5.5                    |                                     | ±0.25             | ±2.5                            | μA    | V <sub>I</sub> (OE) = V <sub>IL</sub> , V <sub>IH</sub><br>V <sub>I</sub> = V <sub>CC</sub> , GND<br>V <sub>O</sub> = V <sub>CC</sub> , GND       |     |     |   |                          |
| I <sub>OLD</sub>         | Minimum Dynamic                      | 5.5                    |                                     |                   | 75                              | mA    | V <sub>OLD</sub> = 1.65V Max                                                                                                                      |     |     |   |                          |
| I <sub>OHD</sub>         | Output Current (Note 3)              | 5.5                    |                                     |                   | −75                             | mA    | V <sub>OHD</sub> = 3.85V Min                                                                                                                      |     |     |   |                          |
| I <sub>CC</sub> (Note 4) | Maximum Quiescent Supply Current     | 5.5                    |                                     | 4.0               | 40.0                            | μA    | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                                                          |     |     |   |                          |

**Note 2:** All outputs loaded; thresholds on input associated with output under test.

**Note 3:** Maximum test duration 2.0 ms, one output loaded at a time.

**Note 4:**  $I_{IN}$  and  $I_{CC}$  @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V  $V_{CC}$ .

## DC Electrical Characteristics for ACT

| Symbol           | Parameter                         | V <sub>CC</sub><br>(V) | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = -40°C to +85°C |  | Units | Conditions                                                                                                            |
|------------------|-----------------------------------|------------------------|------------------------|-------------------|---------------------------------|--|-------|-----------------------------------------------------------------------------------------------------------------------|
|                  |                                   |                        | Typ                    | Guaranteed Limits |                                 |  |       |                                                                                                                       |
| V <sub>IH</sub>  | Minimum HIGH Level Input Voltage  | 4.5                    | 1.5                    | 2.0               | 2.0                             |  | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1V                                                                  |
|                  |                                   | 5.5                    | 1.5                    | 2.0               | 2.0                             |  |       |                                                                                                                       |
| V <sub>IL</sub>  | Maximum LOW Level Input Voltage   | 4.5                    | 1.5                    | 0.8               | 0.8                             |  | V     | V <sub>OUT</sub> = 0.1V<br>or V <sub>CC</sub> - 0.1V                                                                  |
|                  |                                   | 5.5                    | 1.5                    | 0.8               | 0.8                             |  |       |                                                                                                                       |
| V <sub>OH</sub>  | Minimum HIGH Level Output Voltage | 4.5                    | 4.49                   | 4.4               | 4.4                             |  | V     | I <sub>OUT</sub> = -50 μA                                                                                             |
|                  |                                   | 5.5                    | 5.49                   | 5.4               | 5.4                             |  |       |                                                                                                                       |
|                  |                                   | 4.5                    |                        | 3.86              | 3.76                            |  | V     | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OH</sub> = -24 mA<br>I <sub>OH</sub> = -24 mA (Note 5) |
|                  |                                   | 5.5                    |                        | 4.86              | 4.76                            |  |       |                                                                                                                       |
| V <sub>OL</sub>  | Maximum LOW Level Output Voltage  | 4.5                    | 0.001                  | 0.1               | 0.1                             |  | V     | I <sub>OUT</sub> = 50 μA                                                                                              |
|                  |                                   | 5.5                    | 0.001                  | 0.1               | 0.1                             |  |       |                                                                                                                       |
|                  |                                   | 4.5                    |                        | 0.36              | 0.44                            |  | V     | V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OL</sub> = 24 mA<br>I <sub>OL</sub> = 24 mA (Note 5)   |
|                  |                                   | 5.5                    |                        | 0.36              | 0.44                            |  |       |                                                                                                                       |
| I <sub>IN</sub>  | Maximum Input Leakage Current     | 5.5                    |                        | ±0.1              | ±1.0                            |  | μA    | V <sub>I</sub> = V <sub>CC</sub> , GND                                                                                |
| I <sub>OZ</sub>  | Maximum 3-STATE Leakage Current   | 5.5                    |                        | ±0.25             | ±2.5                            |  | μA    | V <sub>I</sub> = V <sub>IL</sub> , V <sub>IH</sub><br>V <sub>O</sub> = V <sub>CC</sub> , GND                          |
| I <sub>CCT</sub> | Maximum I <sub>CC</sub> /Input    | 5.5                    | 0.6                    |                   | 1.5                             |  | mA    | V <sub>I</sub> = V <sub>CC</sub> - 2.1V                                                                               |
| I <sub>OLD</sub> | Minimum Dynamic                   | 5.5                    |                        |                   | 75                              |  | mA    | V <sub>OLD</sub> = 1.65V Max                                                                                          |
| I <sub>OHD</sub> | Output Current (Note 6)           | 5.5                    |                        |                   | -75                             |  | mA    | V <sub>OHD</sub> = 3.85V Min                                                                                          |
| I <sub>CC</sub>  | Maximum Quiescent Supply Current  | 5.5                    |                        | 4.0               | 40.0                            |  | μA    | V <sub>IN</sub> = V <sub>CC</sub><br>or GND                                                                           |

**Note 5:** All outputs loaded; thresholds on input associated with output under test.

**Note 6:** Maximum test duration 2.0 ms, one output loaded at a time.

## AC Electrical Characteristics

| Symbol           | Parameter           | V <sub>CC</sub><br>(V)<br>(Note 7) | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF |     |      | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> = 50 pF |      | Units |
|------------------|---------------------|------------------------------------|--------------------------------------------------|-----|------|-----------------------------------------------------------|------|-------|
|                  |                     |                                    | Min                                              | Typ | Max  | Min                                                       | Max  |       |
| t <sub>PLH</sub> | Propagation Delay   | 3.3                                | 1.5                                              | 6.0 | 8.0  | 1.0                                                       | 9.0  | ns    |
|                  | Data to Output      | 5.0                                | 1.5                                              | 4.5 | 6.5  | 1.0                                                       | 7.0  |       |
| t <sub>PHL</sub> | Propagation Delay   | 3.3                                | 1.5                                              | 5.5 | 8.0  | 1.0                                                       | 8.5  | ns    |
|                  | Data to Output      | 5.0                                | 1.5                                              | 4.5 | 6.0  | 1.0                                                       | 6.5  |       |
| t <sub>PZH</sub> | Output Enable Time  | 3.3                                | 1.5                                              | 6.0 | 10.5 | 1.0                                                       | 11.0 | ns    |
|                  |                     | 5.0                                | 1.5                                              | 5.0 | 7.0  | 1.0                                                       | 8.0  |       |
| t <sub>PZL</sub> | Output Enable Time  | 3.3                                | 1.5                                              | 7.0 | 10.0 | 1.0                                                       | 11.0 | ns    |
|                  |                     | 5.0                                | 1.5                                              | 5.5 | 8.0  | 1.0                                                       | 8.5  |       |
| t <sub>PHZ</sub> | Output Disable Time | 3.3                                | 1.5                                              | 7.0 | 10.0 | 1.0                                                       | 10.5 | ns    |
|                  |                     | 5.0                                | 1.5                                              | 6.5 | 9.0  | 1.0                                                       | 9.5  |       |
| t <sub>PLZ</sub> | Output Disable Time | 3.3                                | 1.5                                              | 7.5 | 10.5 | 1.0                                                       | 11.5 | ns    |
|                  |                     | 5.0                                | 1.5                                              | 6.5 | 9.0  | 1.0                                                       | 9.5  |       |

Note 7: Voltage Range 3.3 is 3.3V ± 0.3V  
Voltage Range 5.0 is 5.0V ± 0.5V

## AC Electrical Characteristics

| Symbol           | Parameter           | V <sub>CC</sub><br>(V)<br>(Note 8) | T <sub>A</sub> = +25°C<br>C <sub>L</sub> = 50 pF |     |      | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> = 50 pF |      | Units |
|------------------|---------------------|------------------------------------|--------------------------------------------------|-----|------|-----------------------------------------------------------|------|-------|
|                  |                     |                                    | Min                                              | Typ | Max  | Min                                                       | Max  |       |
| t <sub>PLH</sub> | Propagation Delay   | 5.0                                | 1.5                                              | 6.0 | 8.5  | 1.5                                                       | 9.5  | ns    |
|                  | Data to Output      |                                    |                                                  |     |      |                                                           |      |       |
| t <sub>PHL</sub> | Propagation Delay   | 5.0                                | 1.5                                              | 5.5 | 7.5  | 1.5                                                       | 8.5  | ns    |
|                  | Data to Output      |                                    |                                                  |     |      |                                                           |      |       |
| t <sub>PZH</sub> | Output Enable Time  | 5.0                                | 1.5                                              | 7.0 | 8.5  | 1.0                                                       | 9.5  | ns    |
| t <sub>PZL</sub> | Output Enable Time  | 5.0                                | 2.0                                              | 7.0 | 9.5  | 1.5                                                       | 10.5 | ns    |
| t <sub>PHZ</sub> | Output Disable Time | 5.0                                | 2.0                                              | 8.0 | 9.5  | 2.0                                                       | 10.5 | ns    |
| t <sub>PLZ</sub> | Output Disable Time | 5.0                                | 2.5                                              | 6.5 | 10.0 | 2.0                                                       | 10.5 | ns    |

Note 8: Voltage Range 5.0 is 5.0V ± 0.5V

## Capacitance



| Symbol          | Parameter                     | Typ  | Units | Conditions             |
|-----------------|-------------------------------|------|-------|------------------------|
| C <sub>IN</sub> | Input Capacitance             | 4.5  | pF    | V <sub>CC</sub> = OPEN |
| C <sub>PD</sub> | Power Dissipation Capacitance | 45.0 | pF    | V <sub>CC</sub> = 5.0V |

**Physical Dimensions** inches (millimeters) unless otherwise noted




**20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Body  
Package Number M20B**


# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

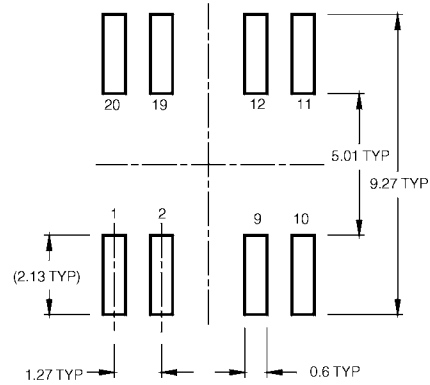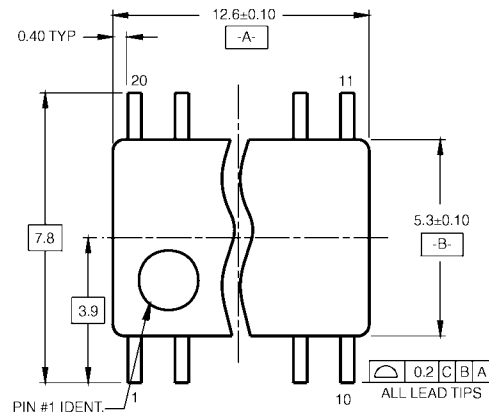

LAND PATTERN RECOMMENDATION

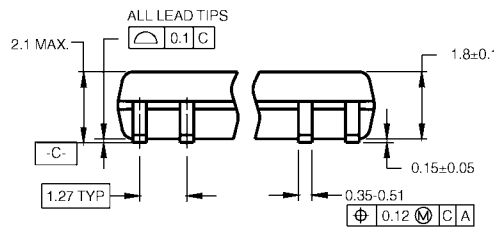


DIMENSIONS ARE IN MILLIMETERS

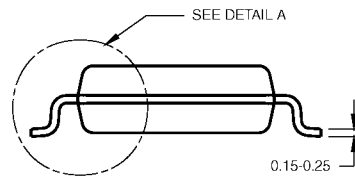

## NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.



M20DRevB1

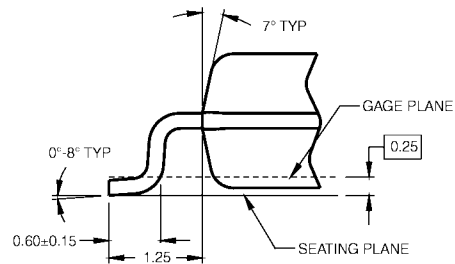

DETAIL A

**20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M20D**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

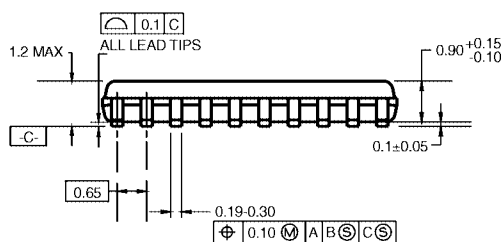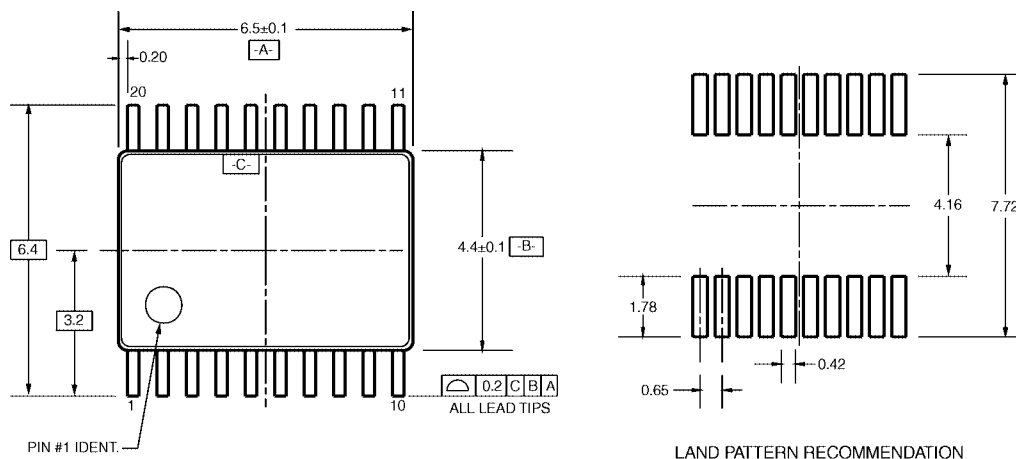


DIMENSIONS ARE IN MILLIMETERS

**NOTES:**

- CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.


MTC20RevD1

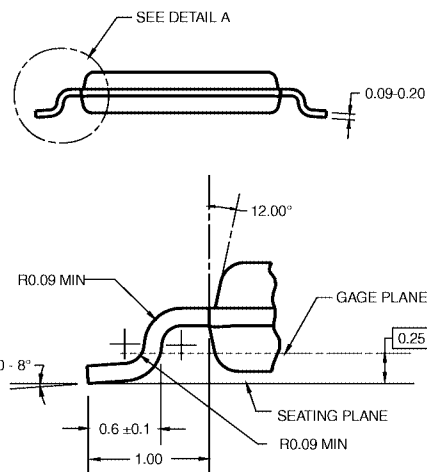

**DETAIL A**

**20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC20**

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

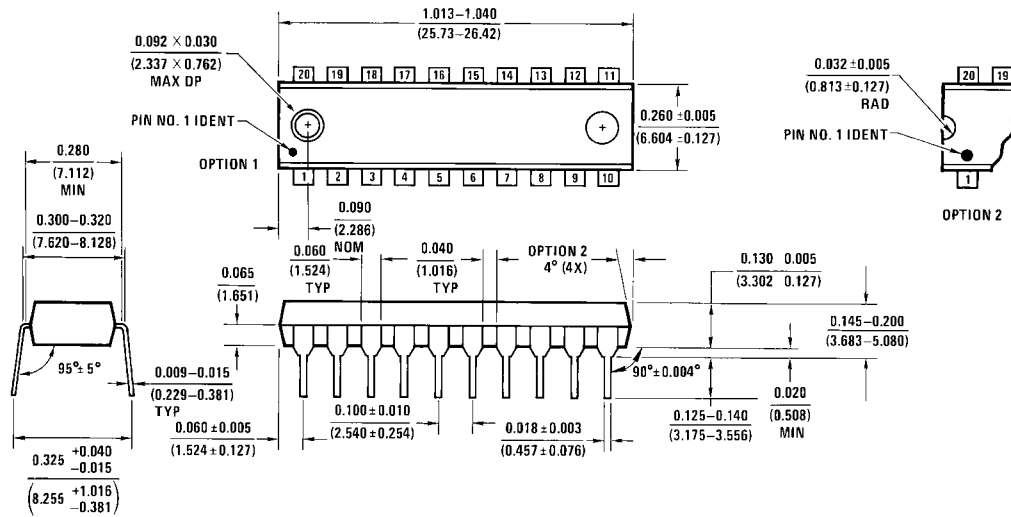

N20A (REV G)

20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide  
Package Number N20A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)