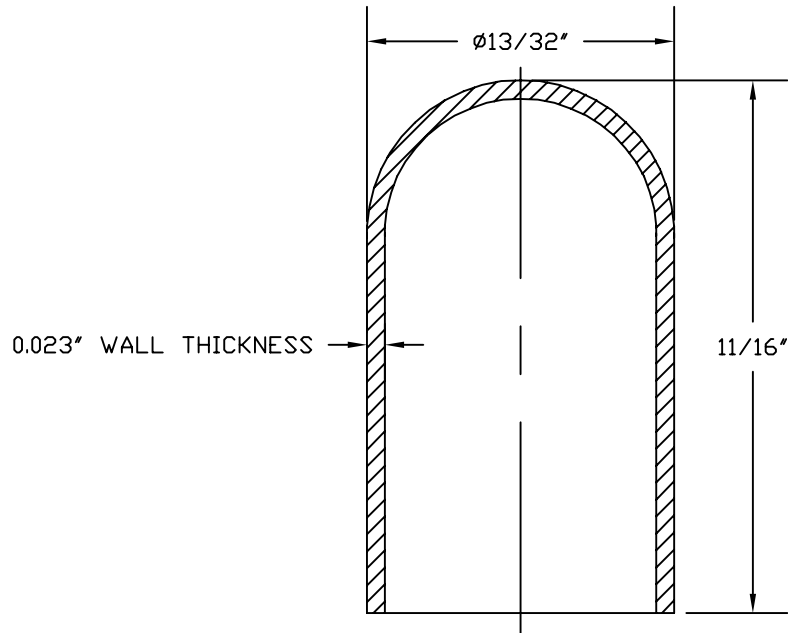
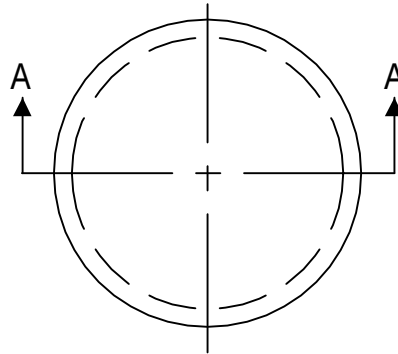


SPECIFICATIONS

	GRADE	
SILIKROME®	COMMERCIAL	MILITARY
Material	Silicone Rubber ASTM D 1418	Silicone Rubber conforming to A-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

**SECTION AA**

C	REDRAWN and MAT'L CHANGED				S. GOK	05.28.09
B	CAD COMPUTER GENERATED					01.10.03
A	REDESIGNED & REDRAWN				NICK	05.07.73
REV.	DESCRIPTION					DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE:	SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-3 1/4 LAMPS	ENG.	S. GOK	05.28.09	
			DWN.	NKS	09.09.66	
			CHKD.	J. CELLA	05.28.09	
MAT'L: SEE ABOVE		APM-HEXSEAL CORPORATION	SCALE	DWG. NO.	1813/27	
COLOR: SPECIFY			4 : 1			

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[APM HEXSEAL:](#)

[1813/27](#) [1813/27 A2 C](#) [1813/27 B1 C](#) [1813/27 G1 C](#) [1813/27 LW1 C](#) [1813/27 R1 C](#) [1813/27 Y1 C](#)