


REV	DESCRIPTION	DATE
E	REVISE PER ECO-15-002399	18FEB15

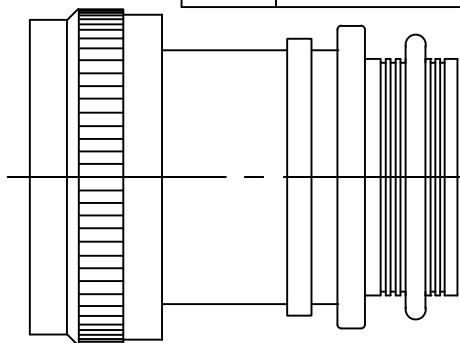

CODE 76 TINEL-LOCK ADAPTER


NOTES:







- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
- SEE CH00-0250-008 FOR ORDERING INFORMATION, MODIFICATIONS, AND ADDITIONAL DIMENSIONS FOR MODIFICATIONS. MODIFICATIONS INDICATED BY TXR__M OR ANY OF THE FOLLOWING LETTERS AT THE END OF THE PART NUMBER H J L P T S N OR V.
- SEE DRAWING TR FOR DETAIL ON TINEL-LOCK RING.
- TEMPERATURE RANGE FOR ALUMINUM ALLOY:
-65 °C TO +150 °C.
- ADAPTER TO BE PERMANENTLY MARKED WITH ASSEMBLY PN LESS RING DESIGNATOR (EG: TXR76AB00-1208) AND CODE IDENT. NO. (06090).
- CONSULT FACTORY FOR OPTIONAL ENTRIES, MATERIALS, MODIFICATIONS, FINISHES AND BRAID DESIGNATORS.
- INTERNAL EDGES SHALL BE ROUNDED.
- FOR LARGER ENTRY SIZES, A 2 PIECE ADAPTER (TYPE II) IS SUPPLIED.
- THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- RINGS SHALL BEAR NO MARKING.
- ADAPTER MATES WITH BS 9522, N0001 PATT 603
BS 9522, F0017 PATT 105.
- THESE DIMENSIONS APPLY IF ADAPTER MATERIAL IS STAINLESS STEEL.

If this document is printed it becomes uncontrolled. Check for the latest revision

(C) 2015 Tyco Electronics Corporation. All Rights Reserved

Raychem Adapters
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMAL TOLERANCES .XXX ± .005 [0.13 mm] .XX ± .01 [0.25 mm] .X ± .1 [0.50 mm] ANGLE TOLERANCE .X ± 1°	DRAWN A. BUI	DATE 08DEC08	 TE Connectivity	
	MATERIAL	TITLE	TINEL-LOCK™ ADAPTER	
	FINISH			
	THIRD ANGLE PROJECTION		SIZE A	CODE IDENT. NO. 06090
CAD FILE TXR76_E			DWG. NO. TXR76	REV E
DO NOT SCALE THIS DRAWING			SHEET 1 OF 3	

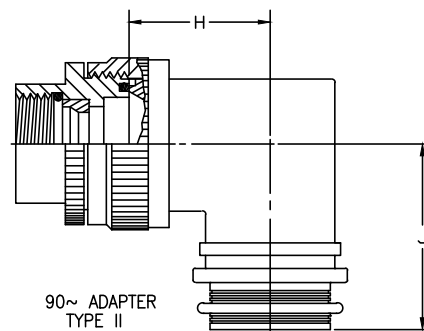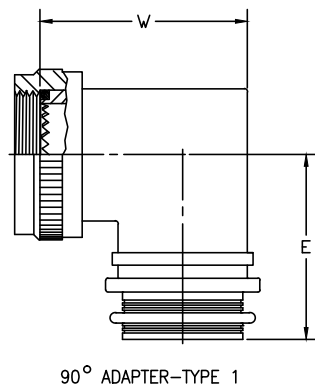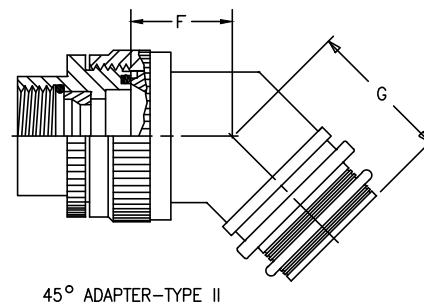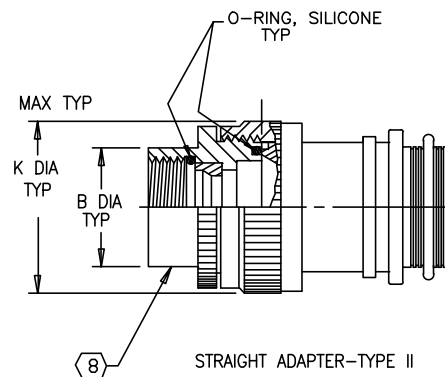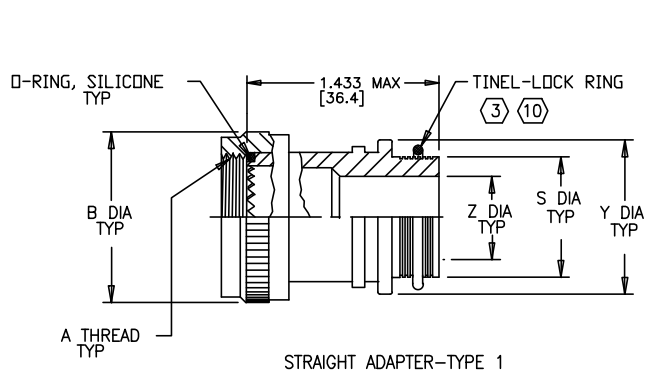

If this document is printed it becomes uncontrolled. Check for the latest revision

Raychem Adapters
CUSTOMER DRAWING

DRAWN A. BUI	DATE 08DEC08		SIZE A	CODE IDENT. NO. 06090	DWG. NO. TXR76	REV E
CAD FILE TXR76_E			DO NOT SCALE THIS DRAWING		SHEET 2 OF 3	

TABLE 1									
ORDER NO.	SHELL SIZE (11)	MAX ENTRY SIZE TYPE I (8)	A THREAD CLASS 2B	B DIA MAX	C MAX	D MAX	E MAX	E MAX (12)	W MAX
08	8	04	.438-28 UNEF	.79 [20.1]	.71 [18.0]	1.07 [27.3]	1.05 [26.7]	1.05 [26.7]	1.004 [25.5]
10	10	06	.562-24 UNEF	.91 [23.1]	.74 [18.8]	1.10 [28.0]	1.12 [28.5]	1.13 [28.7]	1.122 [28.5]
12	12	08	.688-24 UNEF	1.07 [27.2]	.76 [19.3]	1.12 [28.5]	1.19 [30.2]	1.19 [30.2]	1.260 [32.0]
14	14	10	.812-20 UNEF	1.19 [30.2]	.79 [20.1]	1.16 [29.5]	1.25 [31.8]	1.25 [31.8]	1.400 [35.5]
16	16	12	.938-20 UNEF	1.32 [33.5]	.82 [20.8]	1.19 [30.2]	1.32 [33.5]	1.32 [33.5]	1.516 [38.5]
18	18	14	1.062-18 UNEF	1.44 [36.6]	.84 [21.3]	1.22 [31.0]	1.38 [35.1]	1.38 [35.1]	1.653 [42.0]
20	20	16	1.188-18 UNEF	1.57 [39.9]	.87 [22.1]	1.23 [31.4]	1.44 [36.6]	1.44 [36.6]	1.800 [45.5]
22	22	18	1.312-18 UNEF	1.69 [42.9]	.89 [22.6]	1.24 [31.6]	1.50 [38.1]	1.50 [38.1]	1.909 [48.5]
24	24	18	1.438-18 UNEF	1.79 [45.5]	.92 [23.4]	1.28 [32.6]	1.55 [39.4]	1.56 [39.6]	2.030 [51.5]

TABLE II								
ENTRY SIZE	Z +.010 -.020	S DIA	Y ±.015 [±0.38]	F MAX	G MAX	J MAX	H MAX	K MAX
04	.250 [6.35]	.376 [9.56] .370 [9.39]	.550 [13.97]	NA	NA	NA	NA	NA
05	.312 [7.92]	.438 [11.13] .432 [10.97]	.612 [15.54]	.77 [19.6]	1.10 [28.0]	1.16 [29.5]	1.19 [30.2]	.82 [21.0]
06	.375 [9.52]	.501 [12.73] .495 [12.57]	.675 [17.14]	.77 [19.6]	1.10 [28.0]	1.16 [29.5]	1.19 [30.2]	.82 [21.0]
07	.437 [11.09]	.563 [14.31] .556 [14.12]	.737 [18.71]	.80 [20.3]	1.10 [28.0]	1.22 [31.0]	1.38 [35.1]	.92 [23.4]
08	.500 [12.70]	.626 [15.91] .619 [15.72]	.800 [20.32]	.80 [20.3]	1.12 [28.5]	1.22 [31.0]	1.38 [35.1]	.96 [24.5]
10	.625 [15.87]	.752 [19.11] .742 [18.84]	.925 [23.49]	.84 [21.3]	1.16 [29.5]	1.35 [34.3]	1.51 [38.4]	1.18 [30.0]
12	.750 [19.05]	.877 [22.28] .867 [22.02]	1.050 [26.67]	.86 [21.8]	1.19 [30.2]	1.40 [35.6]	1.63 [41.4]	1.35 [34.3]
14	.875 [22.23]	1.002 [25.46] .991 [25.17]	1.175 [29.84]	.88 [22.4]	1.22 [31.0]	1.46 [37.1]	1.78 [45.2]	1.41 [35.8]
16	1.000 [25.40]	1.127 [28.63] 1.116 [28.34]	1.300 [33.02]	.91 [23.1]	1.23 [31.4]	1.53 [38.9]	1.88 [47.8]	1.60 [40.6]
18	1.125 [28.57]	1.252 [31.81] 1.241 [31.52]	1.425 [36.19]	.93 [23.6]	1.24 [31.6]	1.59 [40.4]	2.01 [51.1]	1.66 [42.2]
20	1.250 [31.75]	1.377 [34.98] 1.366 [34.69]	1.550 [39.37]	.98 [24.9]	1.28 [32.6]	1.78 [45.2]	2.13 [54.1]	2.04 [51.8]

If this document is printed it becomes uncontrolled. Check for the latest revision

Raychem Adapter
CUSTOMER DRAWING

DRAWN A. BUI		DATE 08DEC08		SIZE A	CODE IDENT. NO. 06090	DWG. NO. TXR76	REV E
CAD FILE TXR76_E				DO NOT SCALE THIS DRAWING		SHEET 3 OF 3	