


| ORDER NO            | MATERIAL + FINISH | NOTE          |
|---------------------|-------------------|---------------|
| 160088-1            | BRASS             | 1.            |
| <del>160088-2</del> | <del>BRASS</del>  | <del>2.</del> |
| 160088-3            | BRASS             | 3.            |

OBSOLETE

USED ON

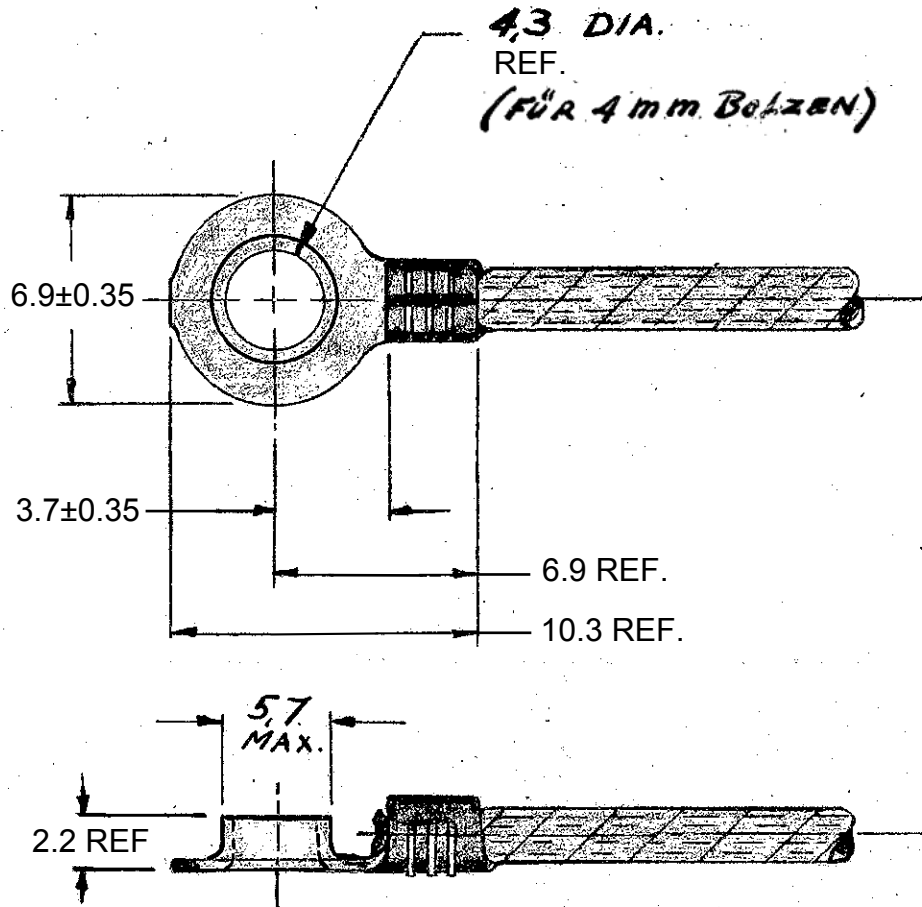

- NOTES:
- 1. FOR USE ON STANDARD AND MINIATURE APPLICATOR.
  - 2. FOR USE ON MINIATURE APPLICATOR, AMP-D. MOTOR APPLICATION.
  - 3. REELED WITH PAPER LAYER

MATERIAL: 05 MESSING

HEAT TREATMENT: ✓

FINISH: ✓

© TE AMP-Holland N.V. 1959

|                 |                            |           |     |
|-----------------|----------------------------|-----------|-----|
| B2              | REVISED PER ECR-17-017713  | 07DEC2017 | BDA |
| B1              | ECR-10-022530              | 02FEB11   | KK  |
| B               | ADDED 160088-3 AND NOTE 3. | 11/14/98  | R-D |
| A               | ADDED: TABLE AND NOTES.    | 31/7/98   | AK  |
| No.             | ALTERATION                 | DATE      | BY  |
| DR. W. J. BOTS. | 6-9-59                     | TR.       |     |
| CK.             |                            | APP.      |     |

**TE**

TE Connectivity

KABELSCHUHE

MIT DURCHGEZOGENEN BOLZENLOCH

CLASS RING ZUNGE

TYPE AUTOMATISCH

SIZE 05-143 mm<sup>2</sup>

TOLERANCES-ALL DIMENSIONS ± , EXCEPT AS NOTED

SCALE: 4-1

C-160088-I