

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E2	REVISED PER ECR-16-007444	31MAY2016	NK	SC

D

D

C


C

B


B

A

A

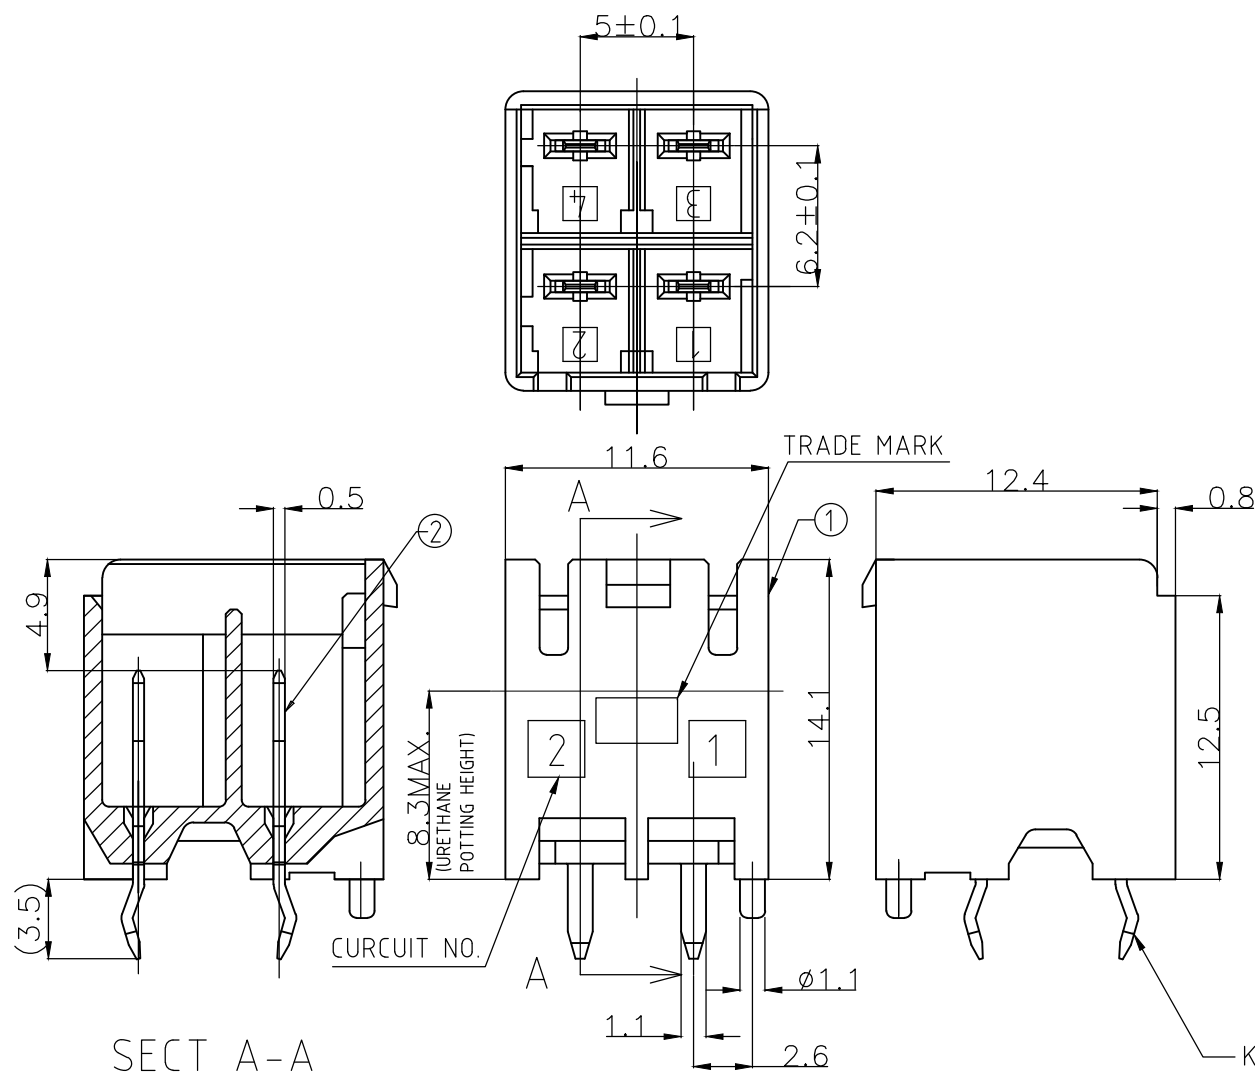


THE TYPE OF KEYING

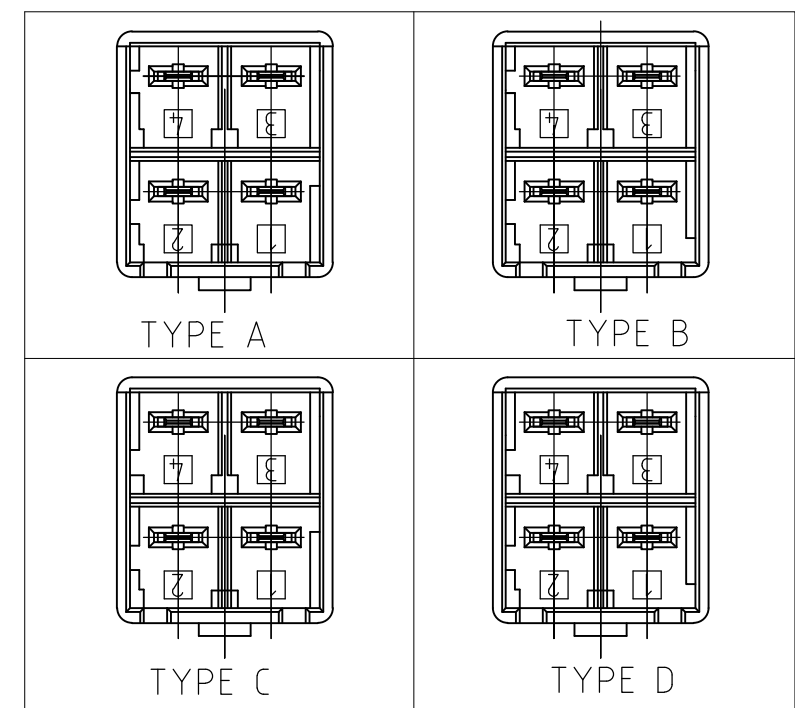

②	HEADER HOISING	6/ 6 NYLON GRASS FILLED
①	TAB	COPPER ALLOY TIN PLATED
NO.	NAME	MATERIAL

△5	1376392-1	WITHOUT KINK	TYPE A	NATURAL	4Pos	5-1376386-1
△5	3-1376392-4	WITH KINK	TYPE D	YELLOW	4Pos	3-1376386-4
△5	2-1376392-3	WITH KINK	TYPE C	BLUE	4Pos	2-1376386-3
△5	1-1376392-2	WITH KINK	TYPE B	RED	4Pos	1-1376386-2
△5	1376392-1	WITH KINK	TYPE A	NATURAL	4Pos	1376386-1
	MATING CONN. P/N	WITH/WTHOUT KINK	TYPE OF KEYING	Color	Pos	PART NO.

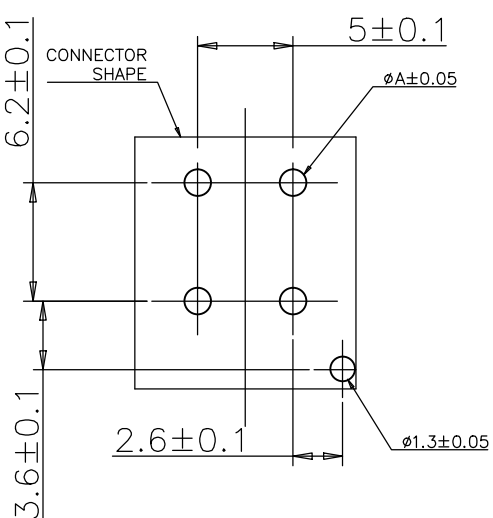

PUNCHING	1.25
DRILLING	1.4
	A 寸法

RECOMMENDED PCB HOLES

- △1 RECOMMENDED P.C.B LAY OUT.
- 2 APPLICABLE P.C.B. THICKNESS:1.6.
- △3 MATING CONN. P/N PLUG HOUSING :SEE TABLE.
- 4 PARTS MEET IEC 60335-1 (GWT GLOW WIRE TEST 750 DEGREE SPEC).
- △5 NYLON 66, GWT, V-0.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLØ ± 0.2
1 P/C ±
2 PLC ±
3/ PLC ±
4 PLC ±
ANGLES ± 1°
FINISH

MATERIAL

SEE TABLE

SEE TABLE

DWN A.OISHI 04APR2003
CHK Y.KASHIWA 28AUG'00
APVD Y.KASHIWA 28AUG'00
PRODUCT SPEC 108-5699
APPLICATION SPEC 114-5292
WEIGHT

STE TE Connectivity



5.0 POWER KEY CONNECTOR
4P HEADER ASSEMBLY
(2ROW)

SIZE A3 CAGE CODE 00779 DRAWING NO C-1376386
SCALE 3:1 SHEET 1 OF 2 REV E2

CUSTOMER DRAWING

RESTRICTED TO

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

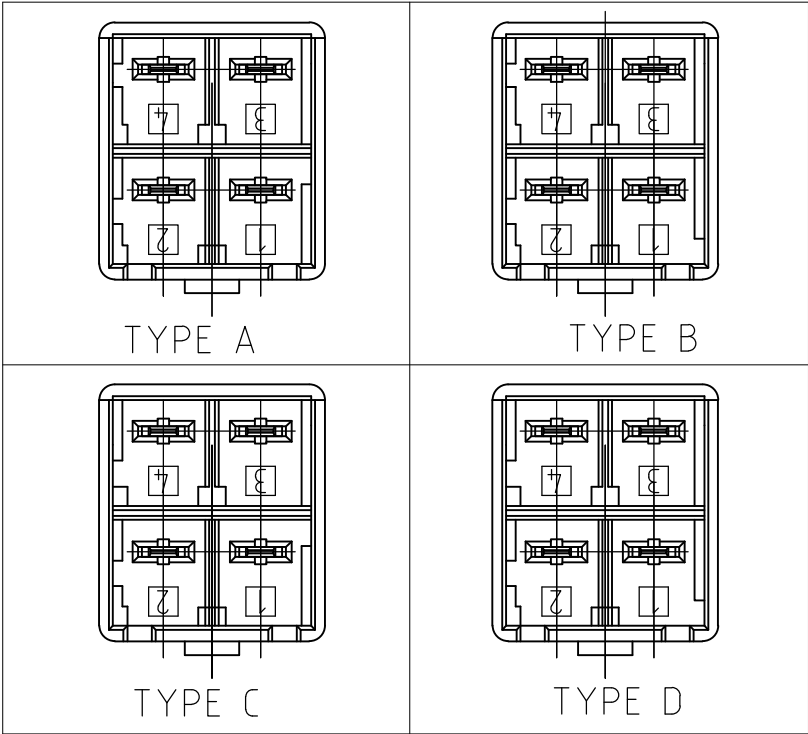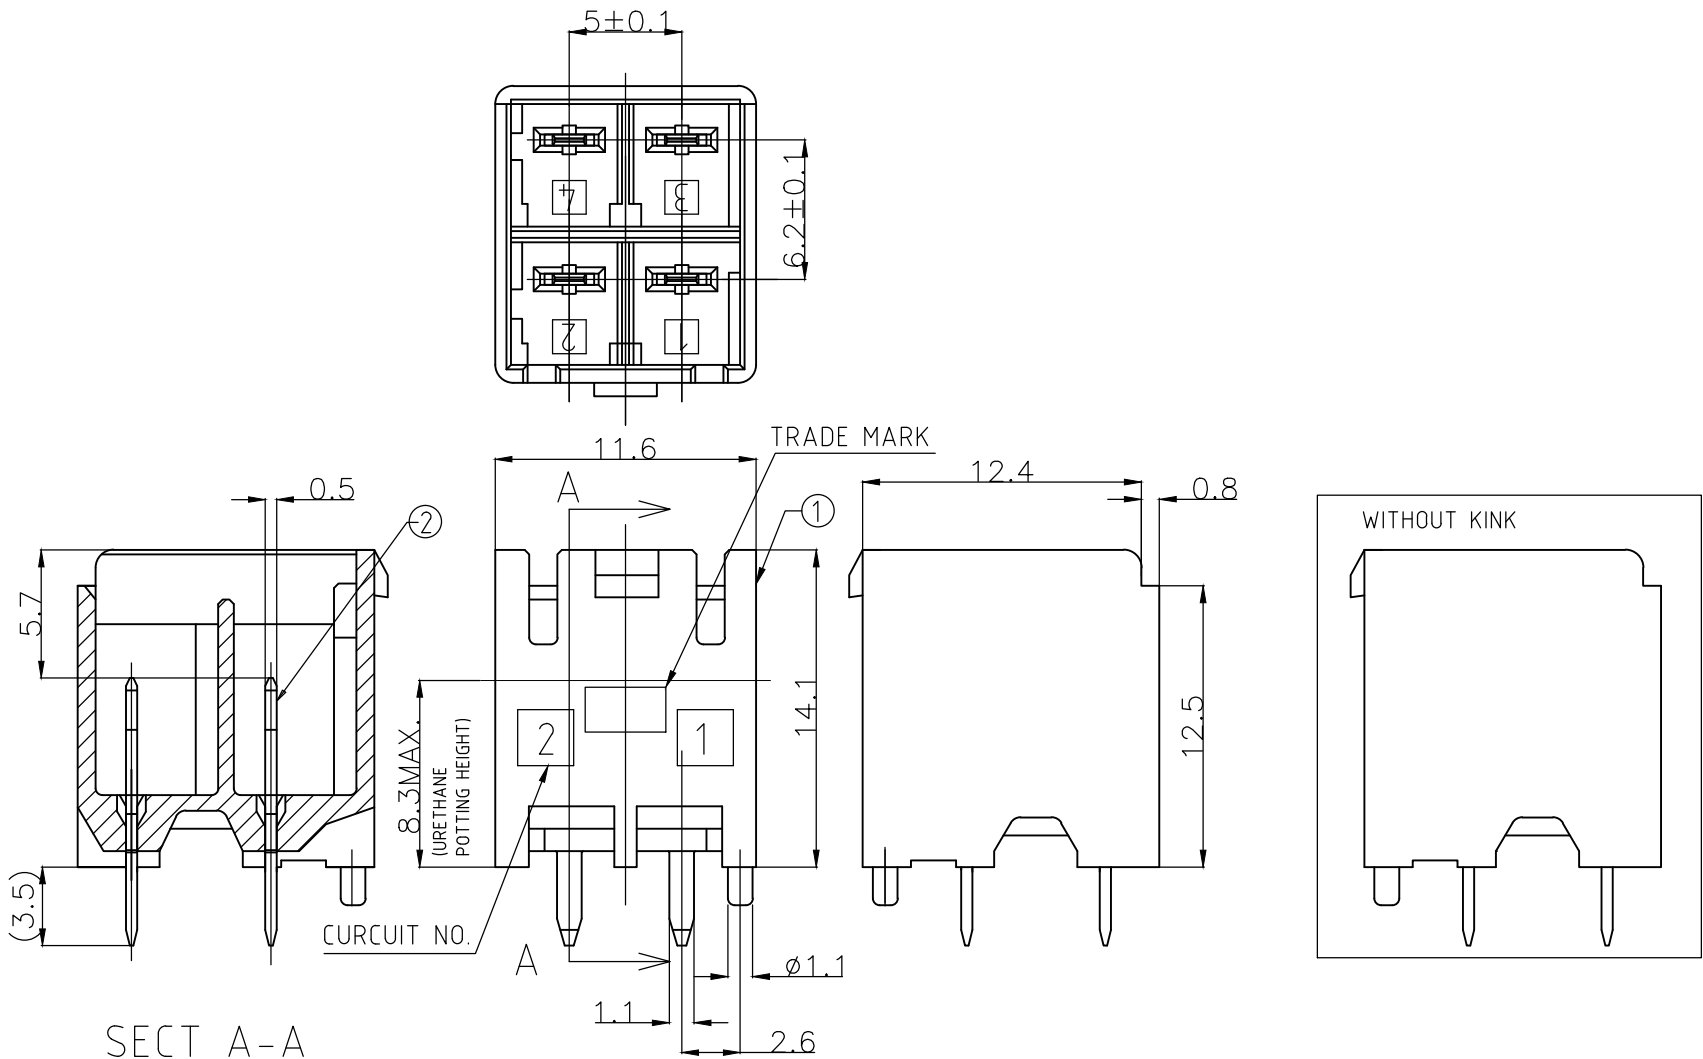

②	HEADER HOISING	6 / 6 NYLON
①	TAB	COPPER ALLOY TIN PLATED
NO.	NAME	MATERIAL

3-1376392-5	TYPE D	YELLOW	4Pos	3-1376386-5
2-1376392-4	TYPE C	BLUE	4Pos	2-1376386-4
1-1376392-3	TYPE B	RED	4Pos	1-1376386-3
1376392-2	TYPE A	NATURAL	4Pos	1376386-2
MATING CONN. P/N	TYPE OF KEYING	Color	Pos	PART NO.

STE TE Connectivity

5.0 POWER KEY CONNECTOR
4P HEADER ASSEMBLY
(2ROW)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1376386	—

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.OISHI 04APR2003	STE TE Connectivity	
DIMENSIONS: MM		CHK Y.KASHIWA 28AUG'00		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Y.KASHIWA 28AUG'00		
0 PLØ ± 0.2 1 P/C ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 1° FINISH		PRODUCT SPEC 108-78863 APPLICATION SPEC 114-5292 WEIGHT —		
MATERIAL SEE TABLE		CUSTOMER DRAWING		SCALE 3:1
				SHEET 2 OF 2
				REV E2