

LDS100 Series

LED Lighting Power Supply - Class 2

Total Power: 100 Watts
of Outputs: Single



Special Features

- Constant Current & Constant Voltage operation
- Dimming options
- Free-Air rated - No forced air necessary for cooling

Compliance

- Class 2 Outputs
- IP64 to IP67 Water Protection
- CISPR 15 / FCC Part 15 EMI Performance
- Class C Harmonics
- < 1.0 W No-load power
- > 0.9 Power Factor

Safety

- EN 61347-2-13
- UL 1310 / 8750
- CSA C22.2 No. 107.1
- CE Mark (LVD)

Warranty

Standard 5-Year Warranty
(Consult Factory for Extended Terms)


Electrical Specifications

Input	
Input range nom:	100 - 240 Vac (U models); 120-277 Vac (H models)
Input range max:	90-264 Vac (U models); 90-305 Vac (H models); Derating may apply
Input frequency:	47 - 63 Hz
Inrush current:	< 50 A max., cold start @ 25 °C
Leakage current:	750 μ A, at 264 Vac 50/60 Hz
Input power (no-load):	< 1.0 W, at no load
Input power (max):	< 118 W, at full load
Input fusing:	Internally fused
EMI/RFI:	CISPR 15 FCC Part 15
Efficiency (typical):	90% - 230 Vac 89% - 115 Vac
Output	
Constant current:	Programmable current levels. Refer to model table for details
Constant voltage:	No load to Full load operation. Refer to model table for details
Output power:	100 W maximum. Class 2 rated outputs
Ripple voltage:	< 2%
Control and Protection	
Current limit:	Programmable. Refer to model table for details
Protection:	Short Circuit Overvoltage Overtemperature

Environmental Specifications

Criteria	Specification	Reference
Power Factor	> 0.9	Energy Star
Harmonics	Class C	IEC 61000-3-2
THD - Input Current	< 20%	ANSI C82.11
Surge Immunity	Level 3 6 kV ring wave	IEC 61000-4-5 ANSI C62.41
EMC Compliance		IEC 61000-4-2, -3, -4, -5, -6, -8, -11
Temperature (case)	-40 °C to 90 °C	Operating
Ingress Protection	IP67	Refer to model table for details

Mechanical Drawing

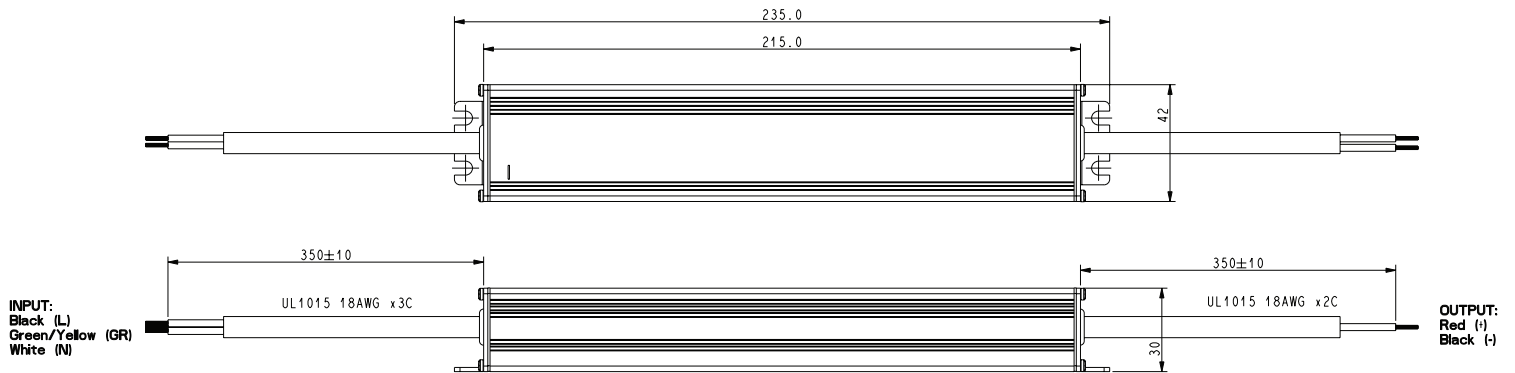

Mechanical Miscellaneous

Criteria	Specification	Reference
Input Wiring	300 mm	3-wire
Output Wiring	300 mm	4-wire
Weight	grams	

Ordering Information


Model Number	Rated Output Voltage	Rated Output Current	Dimming Interface	IP Rating	Status
LDS100-24-U00	24 Vdc	4.1 Adc		IP67	Released
LDS100-24-U04	24 Vdc	4.1 Adc	Programmable ¹	IP67	Coming Soon
LDS100-24-H00	24 Vdc	4.1 Adc		IP67	Released
LDS100-24-H03	24 Vdc	4.1 Adc	1 - 10 V	IP67	Released
LDS100-24-H04	24Vdc	4.1 Adc	Programmable ¹	IP67	Coming Soon
LDS100-31-H03	31 Vdc	3.16 Adc	1 - 10 V	IP67	Released
LDS100-31-H04	31 Vdc	3.16Adc	Programmable ¹	IP67	Coming Soon
LDS100-48-H03	48 Vdc	2.0 Adc	1 - 10 V	IP67	Coming Soon

Notes:

¹ The Dimming Interface on these highly-flexible models can be programmed via a Graphical User-Interface. The options include 0-10V, 1-10V and Bi-Level dimming. Maximum and minimum current levels and threshold levels are also programmable.

Current Adjust and Dimming Description

0 - 10 V Between Purple & Grey Wires (for model -H03 only)

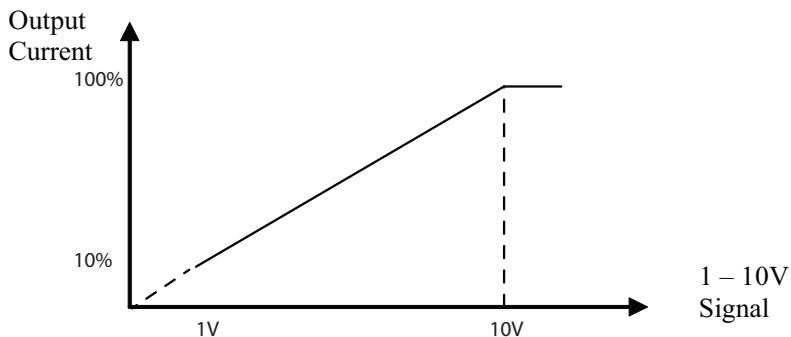

Rev. 10.24.13

LDS100 Series

3 of 3

Americas

5810 Van Allen Way

Carlsbad, CA 92008

USA

Telephone: +1 760 930 4600

Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park

Merry Hill, Dudley

West Midlands, DY5 1LX

United Kingdom

Telephone: +44 (0) 1384 842 211

Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza

2 Wing Yip Street

Kwun Tong, Kowloon

Hong Kong

Telephone: +852 2176 3333

Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower

[techsupport.embeddedpower](mailto:techsupport.embeddedpower@emerson.com)

[@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson and the Emerson Network Power logo are trademarks of Emerson Electric Co.
©2012 Emerson Electric Co.
All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Emerson Network Power:

[LDS100-31-H04](#) [LDS100-24-H04](#) [LDS100-24-U04](#) [LDS100-48-H03](#) [LDS100-31-H03](#)