


GSD

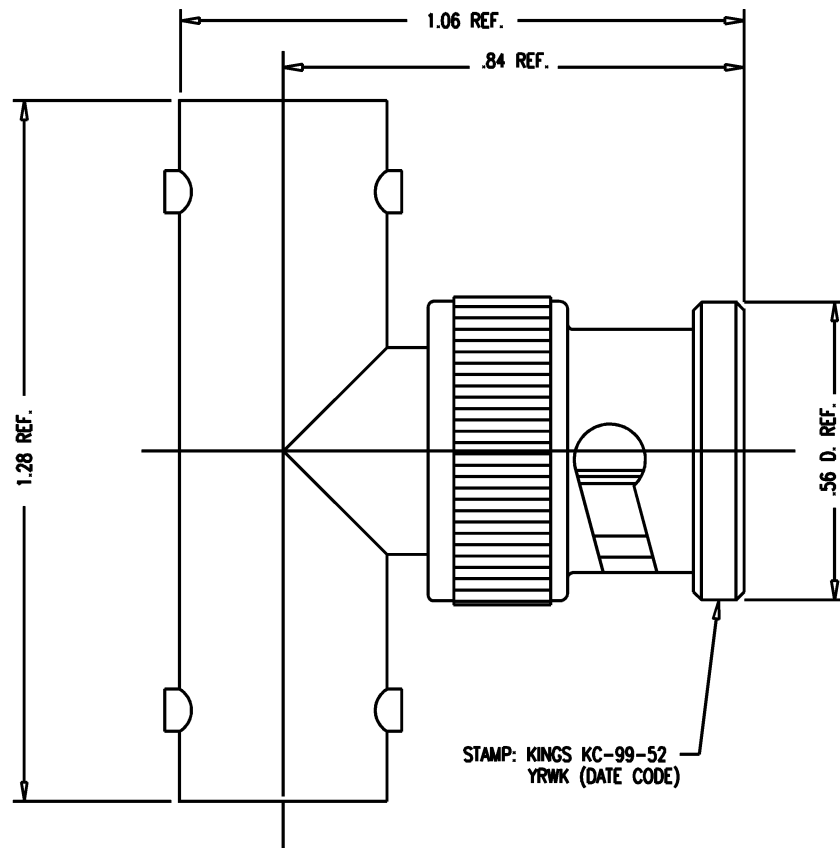

NOTES:

- MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., QQ-R-765
OUTER CONTACT: PHOS. BRONZE, QQ-B-750
SPRING WASHER } BER. COP., ASTM-D-196
CONTACT F }
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
SPRING WASHER } SILVER PLATE PER QQ-S-365
CAM LEVER }
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

GSD

REVISIONS

ISSUE	CHANGES	
	DATE	DESCRIPTION
0	ER 8689 WLA 07/10/70	
1	CN 13259 A WD 03/18/74	
2	CN 16808 C JHP 01/26/77	
3	CN 26730 C AJ 09/23/85	
4	CN 27716 C CT 12/19/85	
5	CN 30559 C JCA 02/24/89	
6	CN 37975 E REDRAWN TML 02/14/00	
7	CN 38007 E TML 06/09/00	

KC9952S

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
ADPT, F-M-F, TEE, BNC	
DRAWN PW	DATE 07/09/70
DESIGN LI	DATE 07/10/70
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-99-52