


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3		F	ECN 387	06/09/95	C

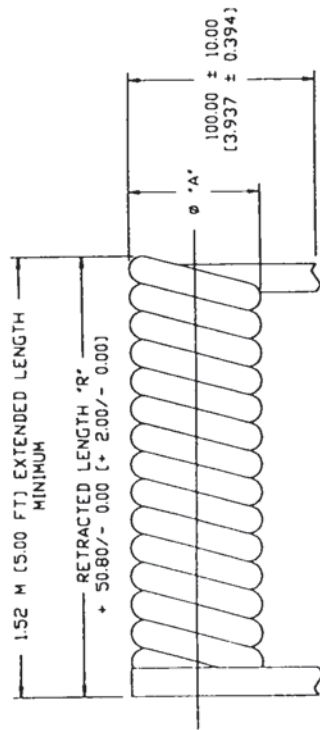

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.



- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=9.0
5	457.20	(18.000)	L=13.00" X W=20.00" X H=9.0
6	558.80	(22.000)	L=13.00" X W=25.00" X H=9.0
CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	DIMENSION MAX. OUTSIDE SHIPPING BOX
TABULATION BLOCK			
THIRD ANGLE PROJECTION			
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)			
DR: GAYN WYNN E: 06/09/95		TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT. EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
CHKD: [Signature]		PART NO: 121-X10-0X3	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET 2 OF 2	

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X2		I	ECN 387	06/09/95	CT

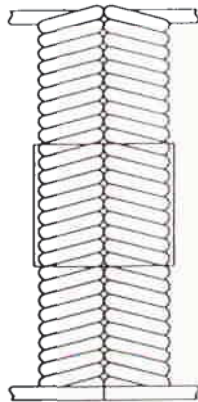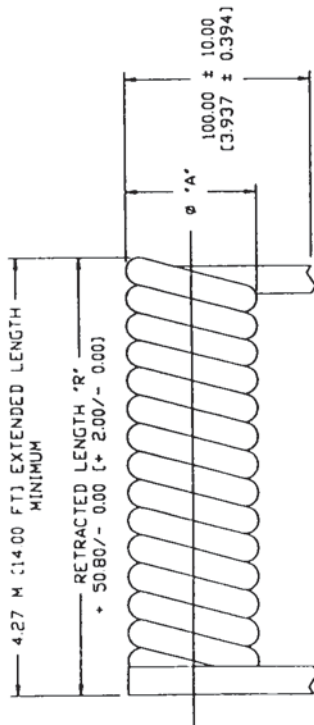

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	[34.000]	L=13.00' X W=40.00' X H=9.00
6	1117.60	[44.000]	L=13.00' X W=50.00' X H=9.00
8	1270.00	[50.000]	L=13.00' X W=55.00' X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH 'R'	INCHES	OUTSIDE SHIPPING BOX


TABULATION BLOCK

THIRD ANGLE PROJECTION			I/O INTERCONNECT
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)		SANTA ANA, CALIFORNIA	
DR: C. WANG		TITLE: 06/09/95	
CHKD: [Signature]		PART NO: 121-X10-0X2	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET: 2 OF 2	

6/10/95

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 387	06/09/95	G.T.

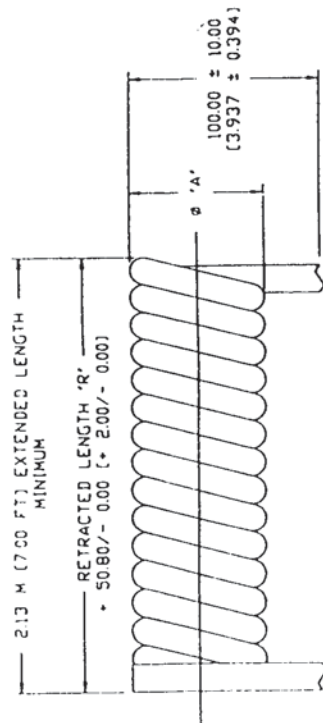

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES


WITH TAPE

4	533.40	(21.000)	L=13.00" X W=25.00" X H=9.00"
6	609.60	(24.000)	L=13.00" X W=25.00" X H=9.00"
8	711.20	(28.000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT 26 AVG (12/0.12 mm) BARE COP 7.00 FT. EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
DR: CAVI C. VAG CHG: Valley	TITLE: SANTA ANA, CALIFORNIA DATE: 06/09/95 PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET: 2 OF 2

THIRD ANGLE PROJECTION




UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETER (INCHES)


2) TOLERANCES:

XX ± 0.20 (0.008)


X.XX ± 6.35 (0.250)

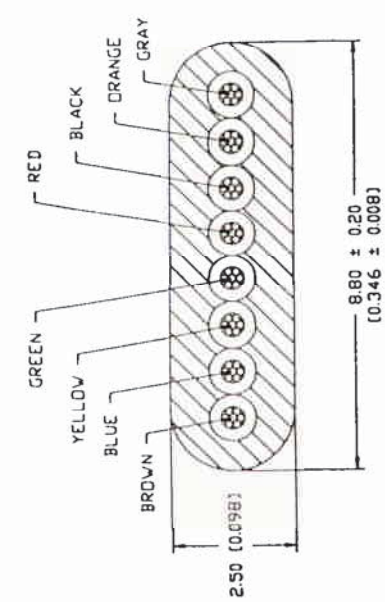

8 CONDUCTOR CABLE

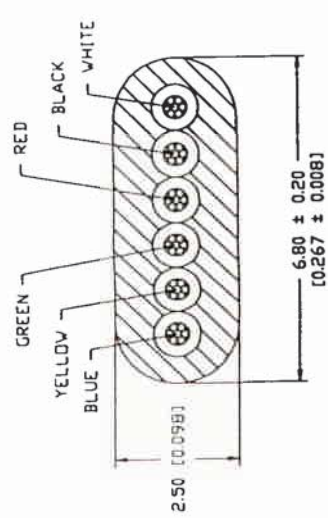

6 CONDUCTOR CABLE

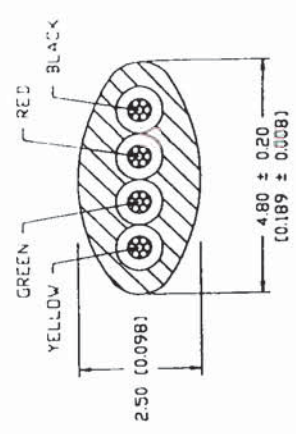

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748 ± 0.0	19.00 ± 1.0
121-810-013	8	BLACK	[0.748 ± 0.0	19.00 ± 1.0
121-810-023	8	WHITE	[0.748 ± 0.0	19.00 ± 1.0
1/0 INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CATH WONG TITLE: 26 AWG (12/012 mm) BARE COPPER
C. WONG 06/09/95 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3
CHKD: *[Signature]* CUSTOMER: I/O INTERCONNECT
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PARTS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

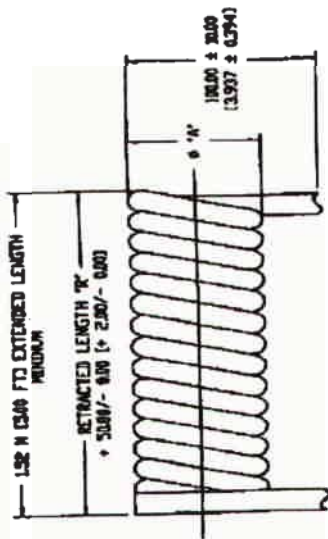

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED:

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.2/0.12 mm) STANNED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHMS/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (500)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY TO BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

CONDUCTORS NUMBER OF	MILLIMETERS	RETRACTED LENGTH "IN"	INCHES
4	431.00	(17.000)	L=13.00" X V=28.00" X H=9.00"
6	457.20	(18.000)	L=13.00" X V=28.00" X H=9.00"
8	508.00	(20.000)	L=13.00" X V=28.00" X H=9.00"
10	609.60	(24.000)	L=13.00" X V=28.00" X H=9.00"

CONDUCTORS NUMBER OF

RETRACTED LENGTH "IN"

INCHES

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX


OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX



I/O INTERCONNECT

SANTA ANA, CALIFORNIA

26 AWG (0.2/0.12 mm) BARE COPPER

500 FT EXTENDED, NON-UL

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNLESS OTHERWISE NOTED

1) DIMENSIONS ARE IN

2) TOLERANCES

XX ± 0.20 (0.008)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)


XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)


XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC.
 DATA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE
 PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

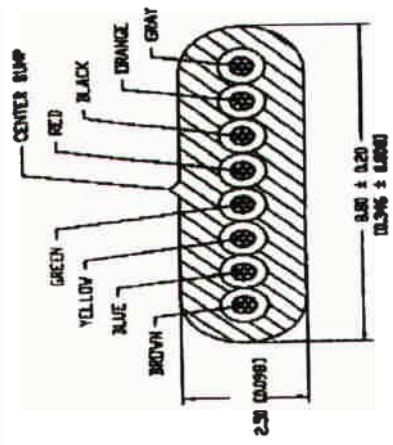


1. CONDUCTOR CABLE

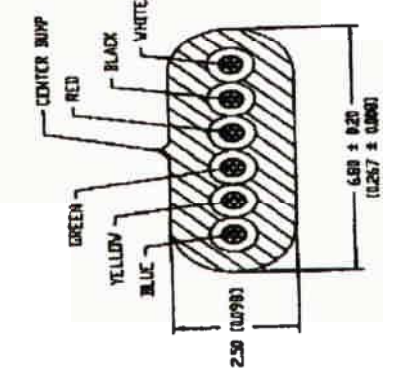

2. CONDUCTOR CABLE

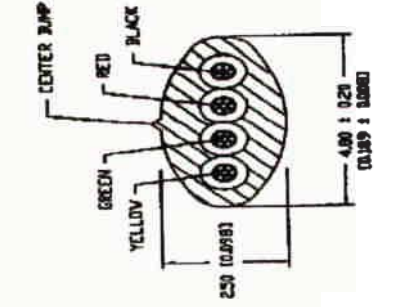

3. CONDUCTOR CABLE

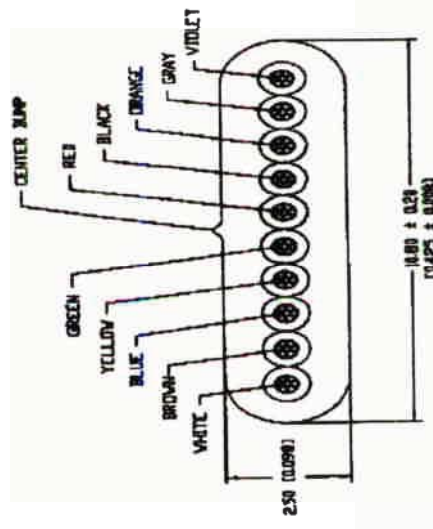

4. CONDUCTOR CABLE

PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø IN.
121-410-000	4	SILVER SATIN	0.551 ± 0.0293
121-410-010	4	BLACK	14.00 ± 1.00
121-410-020	4	WHITE	0.551 ± 0.0293
121-610-000	6	SILVER SATIN	14.00 ± 1.00
121-610-010	6	BLACK	0.551 ± 0.0293
121-610-020	6	WHITE	14.00 ± 1.00
121-810-000	8	SILVER SATIN	0.748 ± 0.0293
121-810-010	8	BLACK	19.00 ± 1.00
121-810-020	8	WHITE	0.748 ± 0.0293
121-100-000	10	SILVER SATIN	19.00 ± 1.00
121-100-010	10	BLACK	0.748 ± 0.0293
121-100-020	10	WHITE	19.00 ± 1.00
121-100-030	10	WHITE	0.748 ± 0.0293
121-100-040	10	WHITE	19.00 ± 1.00
121-100-050	10	WHITE	19.00 ± 1.00
121-100-060	10	WHITE	19.00 ± 1.00
121-100-070	10	WHITE	19.00 ± 1.00
121-100-080	10	WHITE	19.00 ± 1.00
121-100-090	10	WHITE	19.00 ± 1.00
121-100-100	10	WHITE	19.00 ± 1.00
121-100-110	10	WHITE	19.00 ± 1.00
121-100-120	10	WHITE	19.00 ± 1.00
121-100-130	10	WHITE	19.00 ± 1.00
121-100-140	10	WHITE	19.00 ± 1.00
121-100-150	10	WHITE	19.00 ± 1.00
121-100-160	10	WHITE	19.00 ± 1.00
121-100-170	10	WHITE	19.00 ± 1.00
121-100-180	10	WHITE	19.00 ± 1.00
121-100-190	10	WHITE	19.00 ± 1.00
121-100-200	10	WHITE	19.00 ± 1.00
121-100-210	10	WHITE	19.00 ± 1.00
121-100-220	10	WHITE	19.00 ± 1.00
121-100-230	10	WHITE	19.00 ± 1.00
121-100-240	10	WHITE	19.00 ± 1.00
121-100-250	10	WHITE	19.00 ± 1.00
121-100-260	10	WHITE	19.00 ± 1.00
121-100-270	10	WHITE	19.00 ± 1.00
121-100-280	10	WHITE	19.00 ± 1.00
121-100-290	10	WHITE	19.00 ± 1.00
121-100-300	10	WHITE	19.00 ± 1.00
121-100-310	10	WHITE	19.00 ± 1.00
121-100-320	10	WHITE	19.00 ± 1.00
121-100-330	10	WHITE	19.00 ± 1.00
121-100-340	10	WHITE	19.00 ± 1.00
121-100-350	10	WHITE	19.00 ± 1.00
121-100-360	10	WHITE	19.00 ± 1.00
121-100-370	10	WHITE	19.00 ± 1.00
121-100-380	10	WHITE	19.00 ± 1.00
121-100-390	10	WHITE	19.00 ± 1.00
121-100-400	10	WHITE	19.00 ± 1.00
121-100-410	10	WHITE	19.00 ± 1.00
121-100-420	10	WHITE	19.00 ± 1.00
121-100-430	10	WHITE	19.00 ± 1.00
121-100-440	10	WHITE	19.00 ± 1.00
121-100-450	10	WHITE	19.00 ± 1.00
121-100-460	10	WHITE	19.00 ± 1.00
121-100-470	10	WHITE	19.00 ± 1.00
121-100-480	10	WHITE	19.00 ± 1.00
121-100-490	10	WHITE	19.00 ± 1.00
121-100-500	10	WHITE	19.00 ± 1.00
121-100-510	10	WHITE	19.00 ± 1.00
121-100-520	10	WHITE	19.00 ± 1.00
121-100-530	10	WHITE	19.00 ± 1.00
121-100-540	10	WHITE	19.00 ± 1.00
121-100-550	10	WHITE	19.00 ± 1.00
121-100-560	10	WHITE	19.00 ± 1.00
121-100-570	10	WHITE	19.00 ± 1.00
121-100-580	10	WHITE	19.00 ± 1.00
121-100-590	10	WHITE	19.00 ± 1.00
121-100-600	10	WHITE	19.00 ± 1.00
121-100-610	10	WHITE	19.00 ± 1.00
121-100-620	10	WHITE	19.00 ± 1.00
121-100-630	10	WHITE	19.00 ± 1.00
121-100-640	10	WHITE	19.00 ± 1.00
121-100-650	10	WHITE	19.00 ± 1.00
121-100-660	10	WHITE	19.00 ± 1.00
121-100-670	10	WHITE	19.00 ± 1.00
121-100-680	10	WHITE	19.00 ± 1.00
121-100-690	10	WHITE	19.00 ± 1.00
121-100-700	10	WHITE	19.00 ± 1.00
121-100-710	10	WHITE	19.00 ± 1.00
121-100-720	10	WHITE	19.00 ± 1.00
121-100-730	10	WHITE	19.00 ± 1.00
121-100-740	10	WHITE	19.00 ± 1.00
121-100-750	10	WHITE	19.00 ± 1.00
121-100-760	10	WHITE	19.00 ± 1.00
121-100-770	10	WHITE	19.00 ± 1.00
121-100-780	10	WHITE	19.00 ± 1.00
121-100-790	10	WHITE	19.00 ± 1.00
121-100-800	10	WHITE	19.00 ± 1.00
121-100-810	10	WHITE	19.00 ± 1.00
121-100-820	10	WHITE	19.00 ± 1.00
121-100-830	10	WHITE	19.00 ± 1.00
121-100-840	10	WHITE	19.00 ± 1.00
121-100-850	10	WHITE	19.00 ± 1.00
121-100-860	10	WHITE	19.00 ± 1.00
121-100-870	10	WHITE	19.00 ± 1.00
121-100-880	10	WHITE	19.00 ± 1.00
121-100-890	10	WHITE	19.00 ± 1.00
121-100-900	10	WHITE	19.00 ± 1.00
121-100-910	10	WHITE	19.00 ± 1.00
121-100-920	10	WHITE	19.00 ± 1.00
121-100-930	10	WHITE	19.00 ± 1.00
121-100-940	10	WHITE	19.00 ± 1.00
121-100-950	10	WHITE	19.00 ± 1.00
121-100-960	10	WHITE	19.00 ± 1.00
121-100-970	10	WHITE	19.00 ± 1.00
121-100-980	10	WHITE	19.00 ± 1.00
121-100-990	10	WHITE	19.00 ± 1.00
121-100-1000	10	WHITE	19.00 ± 1.00

I/O INTERCONNECT

SHAW AKA, CALIFORNIA

1) DIMENSIONS ARE IN MILLIMETERS (INCHES)

2) TOLERANCES

3) UNLESS OTHERWISE NOTED

THIRD ANGLE PROJECTION

1/10 INTERCONNECT

REV. 1 OF 2

DATE 10/15/78

BY 10/15/78

CHK 10/15/78

DES 10/15/78

APP 10/15/78

1/10 INTERCONNECT

REV. 1 OF 2

DATE 10/15/78

BY 10/15/78

CHK 10/15/78

DES 10/15/78

APP 10/15/78