



1GB to 16GB  
USB Flash Module



www.stec-inc.com

USB Solid-State Flash Disk

Capacity: 1GB - 16GB

USB 2.0 Compliant

Form Factors:

- Horizontal Mount
- Standard Connector or 9-Pin D-Connector
- 1-High TSOP Flash Placement or Stacked TSOP Flash Placement

High Reliability:

- Guaranteed 2M Program/Erase Cycles
- Advanced Wear-Leveling
- BCH ECC Engine corrects up to 6 bits/512 Bytes errors
- Automatic Bad Block Management
- Single Level Cell (SLC) NAND Flash Memory
- 10 Year Data Retention

Unique Serial Number

Commercial and Extended Operating Temperature

RoHS-6 Compliant

## SLUFMxGU2U(I)-y

### General Description

USB Flash Module (UFM) provides non-volatile, solid-state storage in a compact design, making it perfectly suited for embedded applications. The standard USB 2.0 interface provides designers with a true plug-n-play storage device, allowing for short design cycles and fast time to market.

STEC's U2, state-of-the-art, USB 2.0 flash memory controller is incorporated in the UFM, providing high data reliability and endurance. The flash management software that is embedded in the controller emulates a hard disk, enabling read/write operations that are identical to a standard, sector-based hard disk. Sophisticated wear leveling algorithms ensures greater flash endurance, while automatic bad block management and a built-in ECC Engine guarantee the highest data reliability. Based on a BCH error correct algorithm, the ECC engine can correct up to 6-bit errors and per 512 bytes.

USB Flash Module is available with a standard 2.54mm connector or a 9-pin Hirose connector.

High performance, high reliability and low cost per MByte make the USB Flash Module the product of choice in embedded applications, such as Gaming, POS Workstations, Networking Equipment and Industrial PCs.



STEC offers value-added services to OEM customers, such as customized form factors and test solutions, custom firmware, controlled Bill Of Materials, customer-specific labeling and serialization.

### Ordering Information: USB Flash Module

| Part Number     | Flash Placement    | Capacity  |
|-----------------|--------------------|-----------|
| SLUFM1GU2U(I)-y | 1-High TSOP Flash  | 1 GBytes  |
| SLUFM2GU2U(I)-y | 1-High TSOP Flash  | 2 GBytes  |
| SLUFM4GU2U(I)-y | 1-High TSOP Flash  | 4 GBytes  |
| SLUFM8GU2U(I)-y | 1-High TSOP Flash  | 8 GBytes  |
| SLUFM16GU2U-A   | Stacked TSOP Flash | 16 GBytes |

#### Legend:

- **SLUFM** = STEC standard USB Flash Module part number prefix.
- **G** = proceeding capacity (x) is in Gigabytes (G).
- **U2** = STEC U2 controller
- **U** = RoHS-6 compliant
- **Part numbers without (I)** = Commercial Temperature Range (0°C to 70°C).
- **(I)** = Extended Temperature Range (-15°C to +85 °C).
- **(y)** = A for standard 7.4mm height connector      **(y)** = C for 9-Pin Hirose connector



**Note:** 16GB is available with Commercial Temperature Range and standard height connector only.

## Table of Contents

|                                                |           |
|------------------------------------------------|-----------|
| <b>General Description</b>                     | <b>1</b>  |
| <b>Ordering Information: USB Flash Module</b>  | <b>1</b>  |
| <b>1.0 Introduction</b>                        | <b>3</b>  |
| <b>2.0 Product Specifications</b>              | <b>4</b>  |
| 2.1 Mechanical Dimensions                      | 4         |
| 2.1.1 2x5 Standard "A" Connector Form Factor   | 4         |
| 2.1.2 9-Pin Hirose "C" Connector Form Factor   | 5         |
| 2.2 Pin Assignment                             | 6         |
| 2.2.1 "A" Connector, 2x5 Standard              | 6         |
| 2.2.2 "C" Connector, 9-Pin Hirose              | 6         |
| 2.3 Signal Description                         | 6         |
| 2.4 Performance                                | 7         |
| 2.5 Power Consumption                          | 7         |
| <b>3.0 Theory of Operation</b>                 | <b>8</b>  |
| 3.1 Block Diagram                              | 8         |
| 3.1.1 Controller Internal Components           | 8         |
| 3.1.2 Controller external components           | 9         |
| 3.2 Flash Management                           | 9         |
| 3.2.1 Bad Block Management                     | 9         |
| 3.2.2 Wear Leveling                            | 10        |
| 3.2.3 Error Correction                         | 10        |
| 3.3 OS and Boot Support                        | 11        |
| 3.3.1 Using USB Flash Module with XP Embedded  | 11        |
| 3.4 Unique Serial Number                       | 12        |
| <b>4.0 Environmental Specifications</b>        | <b>13</b> |
| 4.1 Recommended Operating Conditions           | 13        |
| 4.2 Reliability                                | 13        |
| 4.3 Shock, Vibration, and Humidity             | 13        |
| 4.4 Electrostatic Discharge (ESD)              | 14        |
| 4.5 Mean Time Between Failure (MTBF)           | 14        |
| 4.6 Standards Compliance                       | 14        |
| <b>5.0 Electrical Specifications</b>           | <b>15</b> |
| 5.1 Absolute Maximum Ratings                   | 15        |
| 5.2 DC Characteristics                         | 15        |
| 5.3 AC Characteristics                         | 16        |
| <b>6.0 SCSI Command List</b>                   | <b>17</b> |
| <b>7.0 Evaluating USB Flash Module</b>         | <b>18</b> |
| <b>8.0 Product Marking</b>                     | <b>19</b> |
| <b>9.0 Programmed Vendor and Product Names</b> | <b>20</b> |
| <b>10.0 Contact Information</b>                | <b>21</b> |
| 10.1 STEC Worldwide Headquarters               | 21        |
| 10.2 STEC Worldwide Locations                  | 21        |
| <b>11.0 Revision History</b>                   | <b>22</b> |

## 1.0 Introduction

This datasheet includes the following sections:

- *Product Specifications* covers the most referenced specifications, such as mechanical dimensions, ball assignment, signal description, and performance.
- *Theory of Operation* explains the USB Flash Module block diagram, and flash management features.
- *Environmental Specifications* characterizes the recommended operating conditions, reliability parameters and shock, vibration and humidity parameters.
- *Electrical Specifications* describes the absolute maximum ratings and AC/DC characteristics.
- *Evaluating USB Flash Module* describes how designers can evaluate the USB Flash Module if there is no 2x5-pin or Hirose connector yet available on the hardware design.
- *Product Marking* describes the marking on the USB Flash Module.



Figure 1: USB Flash Module

## 2.0 Product Specifications

### 2.1 Mechanical Dimensions

#### 2.1.1 2x5 Standard “A” Connector Form Factor

Table 1 and Figure 2 show the mechanical dimensions of the USB Flash Module with 2x5 standard connector.

Table 1: Mechanical dimensions, 2x5 standard connector

| Parameter |                              | Value                              |
|-----------|------------------------------|------------------------------------|
| Length    |                              | 38.00 ± 0.15 mm (1.496 ± 0.006 in) |
| Width     |                              | 23.00 ± 0.15 mm (0.906 ± 0.006 in) |
| Height    | 1-High TSOP Flash Placement  | 10.27 mm (0.404 in) max            |
|           | Stacked TSOP Flash Placement | 11.16 mm (0.439 in) max            |

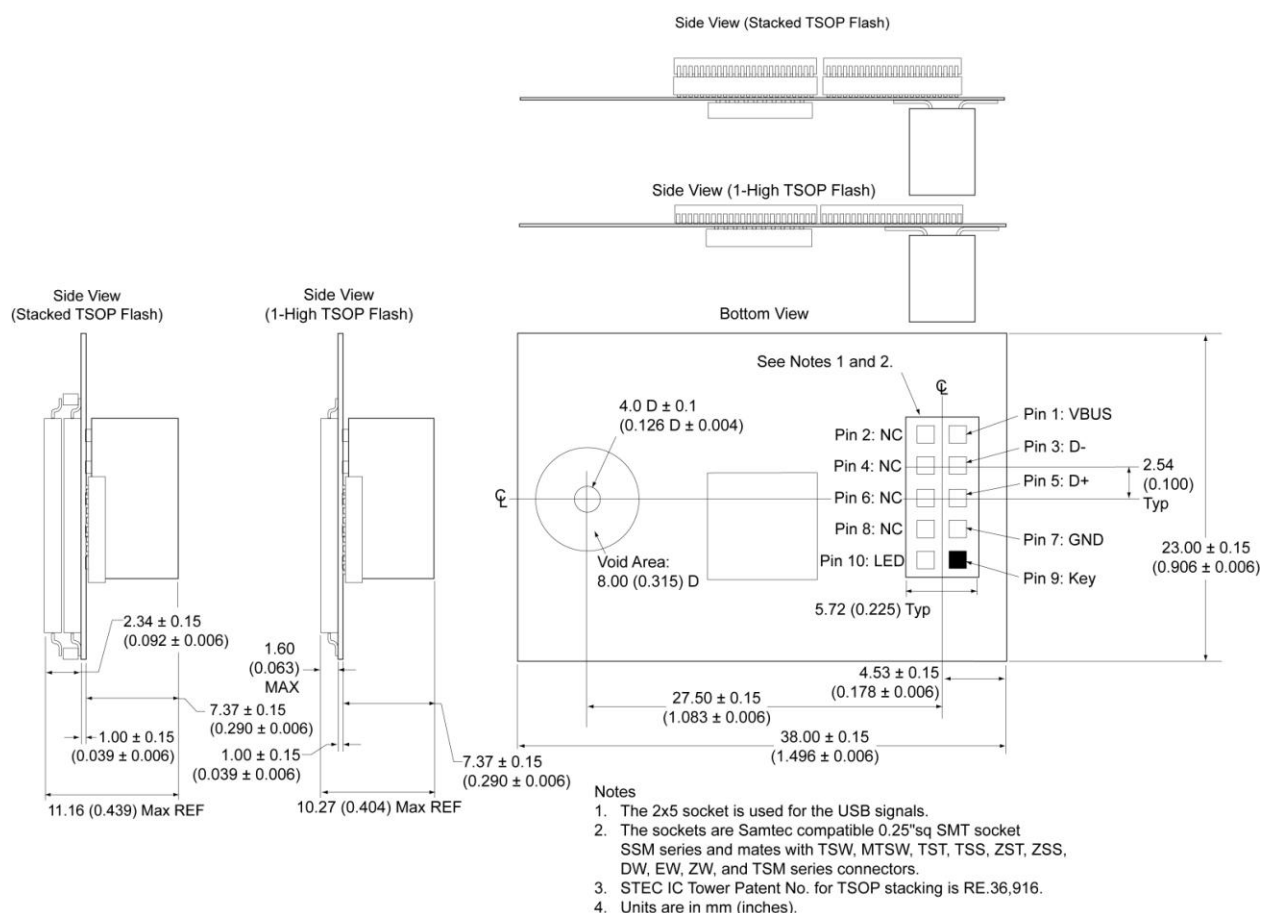



Figure 2: Mechanical dimensions, 2x5 standard connector

### 2.1.2 9-Pin Hirose “C” Connector Form Factor

Table 2 and Figure 3 show the mechanical dimensions of the USB Flash Module with 9-pin Hirose connector.

Table 2: Mechanical dimensions, 9-pin Hirose connector

| Parameter | Value                              |
|-----------|------------------------------------|
| Length    | 38.00 ± 0.15 mm (1.496 ± 0.006 in) |
| Width     | 23.00 ± 0.15 mm (0.906 ± 0.006 in) |
| Height    | 5.97 mm (0.235 in) max             |

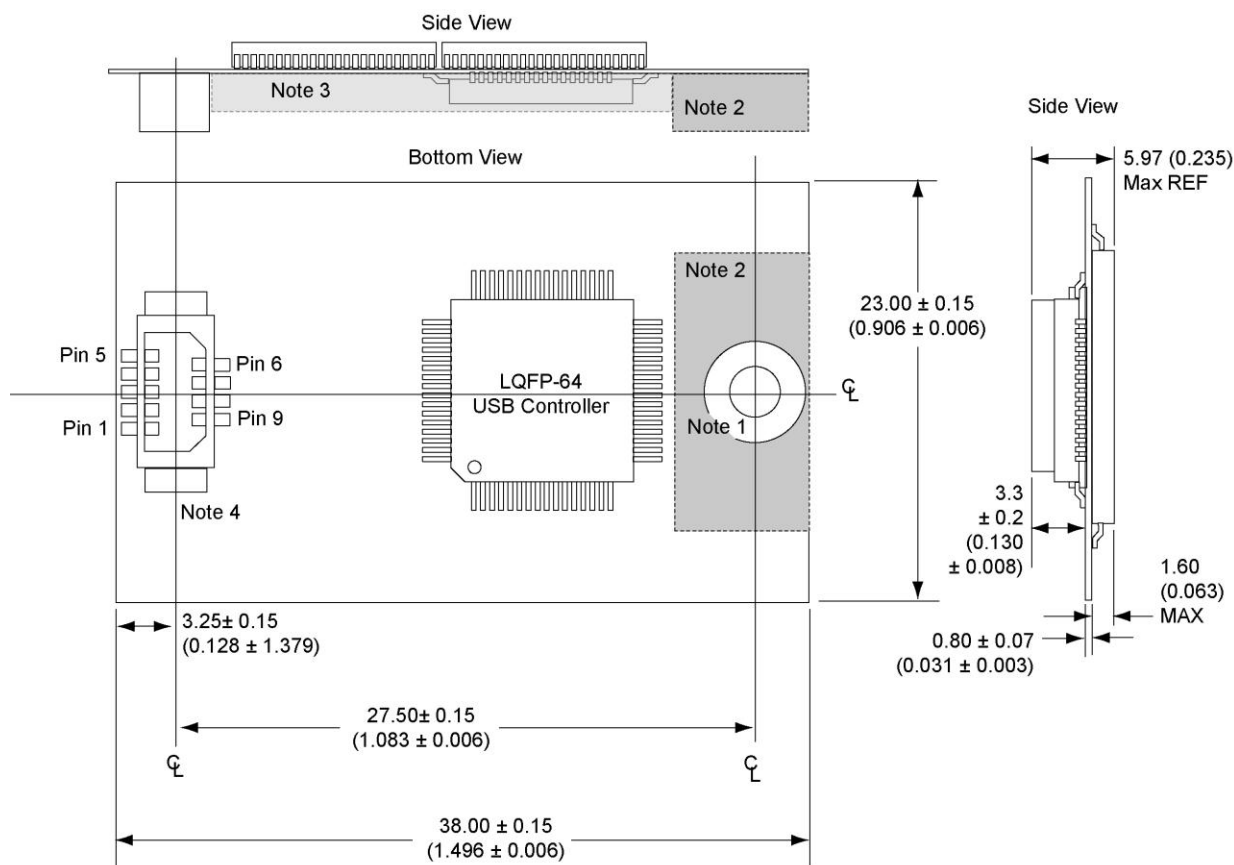

Notes

1. a. Hole for M2.5 x 4 mm panhead machine screw.  
b. 2.9 mm drill diameter.  
c. 5.56 mm plated annular ring top and bottom of PCB.  
d. Main board will use threaded standoff.  
e. Connect annular ring to ground.  
f. Topside Keepout of 6.3 mm (0.248 in) circular area.
2. Standoff Keep Out: of 15.24 x 7.37 mm (0.60 x 0.29 in).
3. Component area on bottom side region extends 3.66 mm (0.145 in) below PCB.
4. Hirose DF9-9S-1V(61) Receptacle.

Figure 3: Mechanical dimensions, 9-pin Hirose connector

## 2.2 Pin Assignment

### 2.2.1 “A” Connector, 2x5 Standard

Table 3: 2x5 Standard Pin Assignment

| Pin Number | Signal Name | Pin Type | Pin Number | Signal Name | Pin Type    |
|------------|-------------|----------|------------|-------------|-------------|
| 1          | VBUS        | Power    | 6          | NC          | I/O         |
| 2          | NC          | —        | 7          | GND         | Ground      |
| 3          | D-          | I/O      | 8          | NC          | —           |
| 4          | NC          | —        | 9          | Key         | Blocked Pin |
| 5          | D+          | I/O      | 10         | LED         | I/O         |

### 2.2.2 “C” Connector, 9-Pin Hirose

Table 4: Hirose Pin Assignment

| Pin Number | Signal Name | Pin Type | Pin Number | Signal Name | Pin Type |
|------------|-------------|----------|------------|-------------|----------|
| 1          | NC          | —        | 6          | GND         | Ground   |
| 2          | NC          | —        | 7          | D+          | I/O      |
| 3          | LED         | I/O      | 8          | D-          | I/O      |
| 4          | NC          | —        | 9          | GND         | Ground   |
| 5          | VBUS        | Power    | —          |             |          |

## 2.3 Signal Description

Table 5: Signal Description

| Signal Name | Type   | Pin Number (A Connectors) | Pin Number (C Connector) | Description                                                 |
|-------------|--------|---------------------------|--------------------------|-------------------------------------------------------------|
| VBUS        | Power  | 1                         | 5                        | Bus voltage supply from source                              |
| D-          | I/O    | 3                         | 8                        | Data line –                                                 |
| D+          | I/O    | 5                         | 7                        | Data line +                                                 |
| GND         | Ground | 7                         | 6, 9                     | Ground                                                      |
| NC          | Open   | 2, 4, 6, 8, 10            | 1, 2, 4                  | No Connect                                                  |
| Key         | Open   | 9                         | —                        | Alignment pin                                               |
| LED         | I/O    | —                         | 3                        | Activity indicator<br>Can be connected to LED on host board |

## 2.4 Performance

*Table 6: Read/Write Performance*

| Parameter       | Value           |
|-----------------|-----------------|
| Sustained Read  | up to 30 MB/sec |
| Sustained Write | up to 20 MB/sec |

## 2.5 Power Consumption

The power consumption currents listed in Table 7 are for reference only. Power consumption may change according to flash memory used.

*Table 7: Power Consumption*

| Power State | Symbol               | Typ Power Consumption<br>(2 Flash Components) | Typ Power Consumption<br>(4 Flash Components) | Unit |
|-------------|----------------------|-----------------------------------------------|-----------------------------------------------|------|
| Normal      | I <sub>NORMAL</sub>  | 67.03                                         | 77.03                                         | mA   |
| Suspend     | I <sub>SUSPEND</sub> | 0.39                                          | 2.39                                          | mA   |
| Sleep       | I <sub>SLEEP</sub>   | 0.38                                          | 1.38                                          | mA   |
| Read        | I <sub>READ</sub>    | 104.12                                        | 134.12                                        | mA   |
| Write       | I <sub>WRITE</sub>   | 118.74                                        | 148.74                                        | mA   |

*Table 8: Number of Flash Components*

| Capacity | Number of Flash Components |
|----------|----------------------------|
| 1GB      | 2                          |
| 2GB      | 2                          |
| 4GB      | 2                          |
| 8GB      | 2                          |
| 16GB     | 4                          |

## 3.0 Theory of Operation

### 3.1 Block Diagram

The USB Flash Module uses STEC's U2, state-of-the art, USB 2.0 controller, and is combined with SLC NAND Flash for optimal device reliability. The controller's firmware supports the latest NAND flash technology from multiple vendors, and is optimized for the highest performance and reliability.

The USB Flash Module controller consists of the functional blocks shown in Figure 4 and described below.

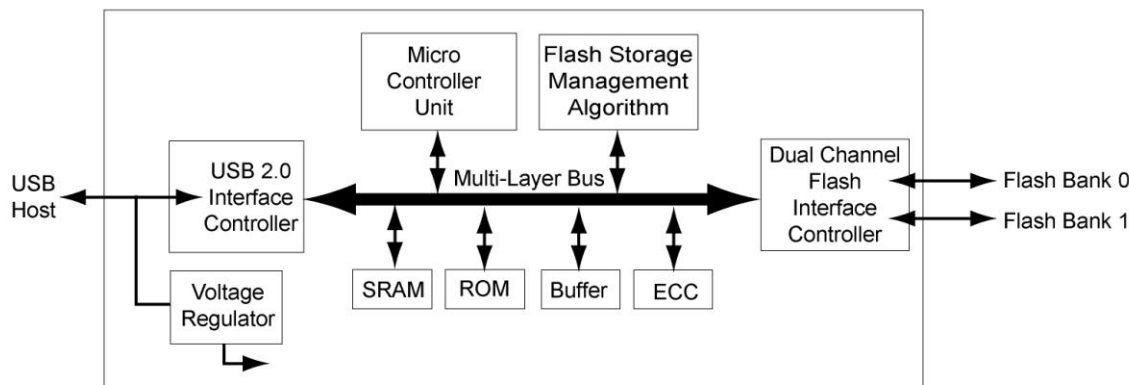


Figure 4: Controller block diagram

#### 3.1.1 Controller Internal Components

- *Microcontroller* which serves as the hardware backbone for the flash controller algorithm.
- *USB 2.0 Interface Controller* with high speed (480 Mbps) device function. This block interfaces with the host system via the USB interface.
- *Flash Interface Controller* that serves as the interface to the NAND flash components. It supports all the major NAND flash memory manufacturers.
- *Flash Storage Management Algorithm Block* is responsible for the flash management, including wear leveling, bad block management, and Error Detection and Correction.
- *ECC block* is responsible for on-the-fly error correction.
- *Sector Buffer* for optimized performance.
- *SRAM* for running controller firmware fast and efficient.
- *ROM* for storing controllers boot code.

### 3.1.2 Controller external components

In addition to the functional blocks shown in Figure 4, the USB Flash Module has the following external components:

- *SLC NAND Flash* for the most reliable data storage.
- *Crystal Oscillator 12Mhz*, as the main clock source.

## 3.2 Flash Management

Since the USB Flash Module provides a standard USB interface to the host, no software integration is required, providing the shortest time-to-market for design engineers.

The firmware of the embedded USB 2.0 controller contains STEC's advanced flash memory management algorithms to ensure the most optimum device performance, reliability and endurance. It was designed to maximize the benefits of flash memory, while at the same time overcoming inherent NAND flash limitations. Implemented in firmware are the below features:

- Flash file system management
- Bad-block management
- Wear-leveling
- Performance optimization

### 3.2.1 Bad Block Management

Inherent to NAND flash technology are areas (blocks) on the media that cannot be used for storage because of their high error rate. These so-called "bad blocks" are already identified by the flash vendor during manufacturing, but can also be accumulated over time during device operation.

The USB 2.0 controller contains a table that lists all the bad blocks on the device (Bad Block Table), and automatically maps out these blocks upon system initialization. During device operation it ensures that newly accumulated bad blocks are also mapped out and added to the Bad Block Table.

Bad block management is 100% transparent to the host application, which will not be aware of the location or existence of bad blocks on the media.

### 3.2.2 Wear Leveling

The SLC NAND flash devices that are being used in the USB Flash Module are guaranteed for 100,000 Write/Erase cycles per block. This means that after approximately 100,000 erase cycles, the erase block has a higher probability for errors than the error rate that is typical to the flash. While 100,000 write/erase cycles may be good for consumer data storage, such as digital cameras, MP3 players, etc., it is not sufficient for industrial and embedded applications where data is constantly written to the device and long product life is required.

For example, operating systems that use a file system, will update the File Allocation Table (FAT) every time a write is done to the device. Without any wear leveling in place, the area on the flash where the FAT table is located would wear out faster than other areas, reducing the lifetime of the entire flash device.

To overcome this limitation, the flash management algorithm needs to make sure that each block in the device ages, i.e. is "worn out", at the same rate. The built-in wear leveling scheme makes sure that with every write to the flash, the youngest block is used. This ensures that the full flash media is used uniformly, so that one area of the flash will not reach the endurance limits prematurely before other areas.

### 3.2.3 Error Correction

The USB 2.0 controller implements an advanced Error Correction scheme, based on the BCH error correct algorithm. The ECC engine can correct up to 6 bits per 512 bytes (symbol based). To ensure the fastest performance, correction is done on-the-fly, in hardware only.

Each time the host application writes a sector of 512 bytes to the USB Flash Module, a unique ECC signature is created by the ECC engine and written together with the data to the flash. When the data is read back by the host, the ECC engine creates again the unique ECC signature. It will then compare the original written signature with the newly created signature, and sets an error flag if the two signatures are not the same. Correction of the data is done on-the-fly when the error flag is set, and the data presented to the host will be the same as the original written data. This powerful Error Correction scheme results in an overall error rate of less than 1 in  $10^{14}$  bits, read.

### 3.3 OS and Boot Support

USB Flash Module can be used as the OS boot and main storage device for most Microsoft Operating Systems, as well as most embedded Operating Systems, as listed in Table 9. In both modes the USB Flash Module is recognized as fixed hard drive in the system.

Table 9: Supported Operating Systems

| Operating System        | Secondary Storage | Boot | Version           |
|-------------------------|-------------------|------|-------------------|
| Windows XP Pro/Vista    | √                 | √    |                   |
| Windows XP Embedded     | √                 | √    | Service Pack 2007 |
| Windows CE              | √                 | √    | 4.2 and 5.0       |
| Windows for POS (WEPOS) | √                 | -    |                   |
| VxWorks                 | √                 | √    | 6.1 and up        |
| Linux                   | √                 | √    | Kernel 2.4 and up |

**Note:** When using the USB Flash Module as the OS boot device, it should be verified that the system BIOS supports booting from a USB device. Please contact your BIOS vendor to verify this.

#### 3.3.1 Using USB Flash Module with XP Embedded

When using USB Flash Module with Windows XP Embedded, it is recommended that the Enhanced Write Filter (EWF) feature is implemented. The EWF intercepts calls at the sector level, and thereby eliminates many file system updates/writes to the flash. Windows XP Embedded Service Pack 2 Feature Pack 2007 introduced an additional write protect feature, called File Based Write Filter (FBWF). The new FBWF function write-protects embedded devices at the file level, in contrast to the EWF, which has been protecting devices at the sector level.

FBWF and EWF, combined with the built-in wear leveling algorithm, ensure that the maximum life span of the flash device is achieved.

### 3.4 Unique Serial Number

During manufacturing stage, a unique serial number is written to the USB Flash Module that includes a date code related to the time of manufacturing.

The serial number uses the following format: AA[B][C][DD][EE][FFFF][GGGG]. Table 10 below describes the parameters of the serial number.

Table 10: Unique Serial Number format

| Symbol | Parameter                        |
|--------|----------------------------------|
| AA     | STEC Reserved                    |
| B      | Year (hex)                       |
| C      | Month (hex)                      |
| DD     | Day (hex)                        |
| EE     | Computer Number (hex)            |
| FFFF   | Last 2 Bytes of MAC Address      |
| GGGG   | Serial Number, Incremental (hex) |

The Serial Number can be obtained through Windows Device Manager or Linux lsusb utility.

## 4.0 Environmental Specifications

### 4.1 Recommended Operating Conditions

Table 11: Recommended Operating Conditions

| Parameter                        | Symbol               | Min  | Typ | Max  | Unit |
|----------------------------------|----------------------|------|-----|------|------|
| Commercial Operating Temperature | T <sub>A1</sub>      | 0    | 25  | 70   | °C   |
| Extended Operating Temperature   | T <sub>A2</sub>      | -15  | -   | 85   | °C   |
| Bus Voltage (5V)                 | V <sub>BUS(5V)</sub> | 4.75 | 5.0 | 5.25 | V    |

### 4.2 Reliability

Table 12: Reliability

| Parameter        | Value                              |
|------------------|------------------------------------|
| Endurance        | Guaranteed 2M program/erase cycles |
| Data reliability | 1 in 10 <sup>14</sup> bits, read   |
| Data retention   | 10 years                           |

### 4.3 Shock, Vibration, and Humidity

Table 13: Shock, Vibration & Humidity

| Parameter | Value                                                                          |
|-----------|--------------------------------------------------------------------------------|
| Shock     | 1500G Peak, 0.5m pulse duration, 5 pulses, 6 axes<br>(per JESD22-B110)         |
| Vibration | 20G Peak, 20-2000 Hz, 4 cycles per direction (X, Y and Z)<br>(per JESD22-B103) |
| Humidity  | 85°C, 85% RH, Vmax for 500 hrs<br>(per JESD22-A101)                            |

#### 4.4 Electrostatic Discharge (ESD)

USB Flash Module has been tested and approved for immunity from ESD under the conditions described in Table 14 below.

Table 14: ESD Rating for USB Flash Module

| ESD Type | Value (KV) |
|----------|------------|
| Air      | 2, 4, 8    |
| Contact  | 2, 4       |

#### 4.5 Mean Time Between Failure (MTBF)

STEC estimates Mean Time Between Failure (MTBF), using a prediction methodology based on reliability data for the individual components in the USB Flash Module. Table 15 below summarizes the prediction results for the USB Flash Module, based on the following two methodologies:

- Telcordia Special Report SR-332, Reliability Prediction Procedure for Electronic Equipment.
- MIL-HNBK-217

The analysis was performed using Relux Software.

Table 15: USB Flash Module MTBF

| Product      | Condition                                   | MTBF (hours) |
|--------------|---------------------------------------------|--------------|
| SLUFM4GU2U-A | Telcordia SR-332, GB, 25°C,<br>MIL-HNBK-217 | >8,000,000   |
| SLUFM8GU2U-A | Telcordia SR-332, GB, 25°C,<br>MIL-HNBK-217 | >7,000,000   |

#### 4.6 Standards Compliance

USB Flash Module complies with the following standards:

- CE - EN 55022/55024
- FCC - Class B for Information Technology
- UL 60950
- RoHS-6
- USB 2.0 – Mass Storage Class

## 5.0 Electrical Specifications

### 5.1 Absolute Maximum Ratings

Operation not guaranteed at extreme corner cases.

Table 16: Absolute Maximum Ratings

| Parameter                                  | Symbol           | Value       | Unit |
|--------------------------------------------|------------------|-------------|------|
| Power Supply Voltage Relative to Ground    | $V_{BUS}-V_{SS}$ | -0.3 to 5.5 | V    |
| Voltage on D+ and D- Relative to Ground    | $V_{DATA}$       | -0.3 to 3.6 | V    |
| Ambient Operating Temperature (Commercial) | $T_{A1}$         | 0 to +70    | °C   |
| Ambient Operating Temperature (Extended)   | $T_{A2}$         | -15 to +85  | °C   |
| Storage Temperature                        | $T_{stg}$        | -40 to +85  | °C   |

### 5.2 DC Characteristics

Measurements at Recommended Operating Conditions, unless otherwise specified.

Table 17: DC Characteristics for Full-Speed Operation ( $T_A=25^{\circ}\text{C}$ ,  $V_{dd}=5\text{V}$ ,  $V_{ss}=0\text{V}$ )

| Parameter                       | Symbol    | Test conditions                | Min | Typ | Max | Unit |
|---------------------------------|-----------|--------------------------------|-----|-----|-----|------|
| Supply Voltage                  | $V_{BUS}$ |                                | 3.0 | 5   | 5.5 | V    |
| Input LOW Voltage               | $V_{IL}$  |                                | -   | -   | 0.8 | V    |
| Input HIGH Voltage              | $V_{IH}$  |                                | 2.0 | -   | -   | V    |
| Output LOW Voltage              | $V_{OL}$  | $R_L$ of 1.5k $\Omega$ to 3.6V | -   | -   | 0.3 | V    |
| Output HIGH Voltage             | $V_{OH}$  | $R_L$ of 15k $\Omega$ to GND   | 2.8 | -   | 3.6 | V    |
| Output Signal Crossover Voltage | $V_{CRS}$ |                                | 1.3 | -   | 2.0 | V    |

Table 18: DC Characteristics for High-Speed Operation ( $T_A=25^{\circ}\text{C}$ ,  $V_{dd}=5\text{V}$ ,  $V_{ss}=0\text{V}$ )

| Parameter                            | Symbol           | Test conditions | Min  | Typ | Max  | Unit |
|--------------------------------------|------------------|-----------------|------|-----|------|------|
| Supply Voltage                       | $V_{\text{BUS}}$ |                 | 3.0  | 5   | 5.5  | V    |
| High Speed Idle Level                | VHSOI            |                 | -10  | -   | 10   | mV   |
| High Speed Data Signaling High       | VHSOH            |                 | 360  | -   | 440  | mV   |
| High Speed Data Signaling Low        | VHSOL            |                 | -10  | -   | 10   | mV   |
| Chirp J Level (differential Voltage) | VCHIRPJ          |                 | 0.7  | -   | 1.1  | V    |
| Chirp K Level (differential Voltage) | VCHIRPK          |                 | -0.9 | -   | -0.5 | mV   |

### 5.3 AC Characteristics

Measurements at Recommended Operating Conditions, unless otherwise specified.

Table 19: AC Characteristics Full Speed

| Parameter                                | Symbol            | Min | Typ | Max    | Unit     |
|------------------------------------------|-------------------|-----|-----|--------|----------|
| Rise Time                                | $T_{\text{FR}}$   | 4   | -   | 20     | ns       |
| Fall Time                                | $T_{\text{FF}}$   | 4   | -   | 20     | ns       |
| Differential Rise and Fall Time Matching | $T_{\text{FRFM}}$ | 90  |     | 111.11 | %        |
| Driver Output Resistance                 | $Z_{\text{DRV}}$  | 28  | -   | 44     | $\Omega$ |

Table 20: AC Characteristics High Speed

| Parameter                | Symbol             | Min  | Typ | Max  | Unit     |
|--------------------------|--------------------|------|-----|------|----------|
| Rise Time (10%~90%)      | $T_{\text{HSR}}$   | 500  | -   | -    | ps       |
| Fall Time (10%~90%)      | $T_{\text{HSF}}$   | 500  | -   | -    | ps       |
| Driver Output Resistance | $Z_{\text{HSDRV}}$ | 40.5 | -   | 49.5 | $\Omega$ |

## 6.0 SCSI Command List

Table 21: SCSI Command List

| Command List                 | OpCode | RBC | SPC-2 | SPC-3 |
|------------------------------|--------|-----|-------|-------|
| INQUIRY                      | 12h    | √   | √     | √     |
| MODESENSE(6)                 | 1Ah    | √   | √     | √     |
| MODESENSE(10)                | 5Ah    | -   | √     | √     |
| PREVENT/ALLOW MEDIUM REMOVAL | 1Eh    | √   | √     | √     |
| READ(10)                     | 28h    | √   | -     | -     |
| READ CAPACITY                | 25h    | √   | -     | -     |
| REQUEST SENSE                | 03h    | -   | √     | √     |
| START STOP UNIT              | 1Bh    | √   | -     | -     |
| TEST UNIT READY              | 00h    | √   | √     | √     |
| WRITE(10)                    | 2Ah    | √   | -     | -     |
| VERIFY(10)                   | 2Fh    | √   | -     | -     |
| SYNC CACHE                   | 35h    | √   | -     | -     |

## 7.0 Evaluating USB Flash Module

Adapters are available for customers that do not have the hardware layout ready for the USB Flash Module. The adapter shown in Figure 5 uses a standard “series A” (2.54mm) connector and enable inserting the USB Flash Module into a standard USB port on a desktop or laptop PC. Inquire for adapters that use the “series C” (9-pin Hirose) connector.



*Figure 5: USB Flash Module Adapter*

The adapters can be ordered with the following ordering information:

- SLUFDM-2x5-ADPT-A
- SLUFDM-ADPT-C (Preliminary, inquire for availability)

With:

A = Adapter for USB Flash Module with standard 2.54mm connector

C = Adapter for USB Flash Module with 9-pin Hirose connector

## 8.0 Product Marking

The flash module will be shipped with 2 labels, the Manufacturing Label and the Standards Label. The Manufacturing Label lists the Customer Part Number, Serial Number, BOM Assembly Number, Ordering Part Number, Kanban ID (with date code). Refer to Table 22 to decode the Kanban ID and Table 23 to decode the BOM Assembly Number.

Table 22: Kanban ID info

| Kanban ID<br>yymmdd-XXX-xxx | Description                                 |
|-----------------------------|---------------------------------------------|
| yymmdd                      | Date code of manufacturing                  |
| XXX                         | SMT Line at which the part was manufactured |
| xxx                         | lot code                                    |

Table 23: BOM Assembly Number info

| BOM Assembly Number<br>(Format: ppp00-0xxxx-yyzCU) | Description                                                                                      |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------|
| ppp00                                              | STEC designation for OEM Flash products (ppp is 940 for standard, or customer prefix for custom) |
| 0xxxx                                              | PCB Number                                                                                       |
| yy                                                 | Product Revision                                                                                 |
| z                                                  | Capacity Designator (Randomly assigned per PCB number based on designator availability)          |
| C                                                  | Commercial Operating Temperature                                                                 |
| U                                                  | RoHS Compliant                                                                                   |

The Standards Label (Figure 6) shows the standards for which the USB Flash Module is certified.



Figure 6: Standards Label

## 9.0 Programmed Vendor and Product Names

The USB Flash Module can be manufactured with standard or customer-specific Vendor and Product Names. Table 24 lists the STEC standard names for USB Flash Module.

The names can be displayed by the OS, for example, Windows XP displays the names in the notifications area in the right corner of the screen the first time the module is installed. Windows Device Manager and the properties of the USB Flash Module also can display the names

*Table 24: STEC Standard USB Vendor and Product Names*

| Parameter    | Value          |
|--------------|----------------|
| Vendor Name  | "STEC"         |
| Product Name | "STEC USB 2.0" |

## 10.0 Contact Information

### 10.1 STEC Worldwide Headquarters

| STEC INC                       |                  |                         |
|--------------------------------|------------------|-------------------------|
| 3001 Daimler Street            | General Support: | 1-949-476-1180          |
| Santa Ana, California 92705    | Fax Number:      | 1-949-476-1209          |
| United States of America (USA) | E-mail:          | oemsupport@stec-inc.com |

### 10.2 STEC Worldwide Locations

| STEC ITALY S. R. L.                                                                                          | STEC TAIWAN                                                                                                   | STEC JAPAN G.K.                                                                                                           |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Via del Caravaggio, 3<br><br>20111 Milano<br><br>Italy                                                       | RM1101, 11F, No. 495<br><br>Guang-Fu S. Road<br><br>Taipei<br><br>Taiwan                                      | Shinyurigaoka-City Building 4-402<br><br>1-1-1, Manpukuji, Aso-ku, Kawasaki-shi<br><br>Kanagawa-ken 215-0004<br><br>Japan |
| Phone: +39 02 497 56 213                                                                                     | Phone: +886 2 8780 8000 Ext. 1101<br><br>Fax: +886 2 8725 7711                                                | Phone: +81 44-959-2883<br><br>Fax: +81 44-959-2887                                                                        |
| STEC MALAYSIA                                                                                                | STEC CHINA                                                                                                    |                                                                                                                           |
| STEC Technology Sdn<br><br>Plot 107 Bayan Lepas Industrial Park<br><br>Phase 4<br><br>11900 Penang, Malaysia | RM1805, 18F Bund Centre<br><br>222 Yan An Road East<br><br>HuangPu District Shanghai 200002<br><br>P.R. China |                                                                                                                           |
| Phone: +60 (4) 8887888                                                                                       | Phone: +86 21 6132 3892 Ext. 629<br><br>Fax: +86 21 6335 1336                                                 |                                                                                                                           |

## 11.0 Revision History

| <b>Revision</b> | <b>Date</b> | <b>Description</b>                                                                                                                                                                               |
|-----------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -101            | 10/24/2008  | Preliminary initial release.                                                                                                                                                                     |
| -102            | 11/17/2008. | Dimension line from center of connector to center of mounting hole corrected.                                                                                                                    |
| -103            | 11/27/2008  | Form Factor with low profile connector (y=B) is not offered.                                                                                                                                     |
| -104            | 12/03/2008  | ECC engine corrects 12 bits/512 bytes.                                                                                                                                                           |
| -105            | 12/12/2008  | Endurance added to Features and Reliability table.                                                                                                                                               |
| -106            | 12/22/2008  | Serial Number definition updated. Bus Voltage corrected. Absolute Maximum Ratings at extreme corners or not guaranteed. Product Name programmed into device updated. Preliminary notice removed. |
| -107            | 01/09/2009  | V <sub>BUS(3V3)</sub> removed from Recommended Operating Conditions.                                                                                                                             |
| -108            | 02/06/2009  | V <sub>BUS(5V)</sub> tolerance updated to $\pm 5\%$                                                                                                                                              |
| -109            | 92/18/2009  | Mounting hole dimension of standard height uFM corrected from 3.2mm to 4.0mm.                                                                                                                    |
| -110            | 92/23/2909  | Linux utility to obtain Serial Number is corrected to lsusb.                                                                                                                                     |
| -111            | 10/27/2009  | 16GB capacity added.                                                                                                                                                                             |
| -112            | 12/01/2009  | Stacked Flash Package Dimensions added for 16GB.                                                                                                                                                 |
| -113            | 12/07/2009  | Industrial Temperature option updated to Extended Temperature option.                                                                                                                            |
| -114            | 06/07/2010  | ECC corrects 6-bit with 2K/4K flash, and 12-bit with 8K flash.                                                                                                                                   |
| -115            | 08/18/2010  | Serial Number definition updated. BOM Assembly Number table clarified.                                                                                                                           |
| -116            | 10/21/2010  | BOM Number decoder table corrected.                                                                                                                                                              |

#### DISCLAIMER OF LIABILITY

STEC™ Inc. reserves the right to make changes to specifications and product descriptions such as but not limited to numbers, parameters and other technical information contained herein without notice. Please contact the STEC™ Inc. sales office to obtain the latest specifications. STEC™ Inc. grants no warranty with respect to this datasheet, neither explicit or implied, and is not liable for direct or indirect damages. Some states do not grant the exclusion of incidental damages and as such this statement may not be valid in such states. The provisions of the datasheet do not convey to the purchaser of the device any license under any patent rights or other intellectual property rights of STEC Inc. or others.

#### EXPORT ADMINISTRATION REGULATIONS

The information provided may be subject to United States Export Controls. Such information should not be downloaded or exported (i), into (or to a national or resident of) Cuba, Iraq, Libya, North Korea, Iran, Syria, or any other country to which the United States has embargoed goods; or given to (ii), anyone on the United States Treasury Department's list of Specially Designated Nationals or the U.S. Commerce Department's Table of Deny Orders. By using the information, you represent and warrant that you are not located in, under the control of, or a national or resident of any such country or on any such list.

#### COPYRIGHT NOTICE

Copyright © 2009 by STEC™ Inc. All rights reserved. Information contained in this document, including but not limited to any instructions, descriptions and product specifications, is considered proprietary and confidential to STEC™, Inc. and shall not be modified, used, copied, reproduced or disclosed in whole or in part, in any form or by any means, electronic or mechanical, for any purpose, without the written consent of STEC™ Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STEC:](#)

[SLUFM8GU2U-A](#) [SLUFM8GU2UI-A](#) [SLUFM2GU2UI-A](#) [SLUFM4GU2U-A](#) [SLUFM4GU2UI-A](#) [SLUFM1GU2UI-A](#)  
[SLUFM2GU2U-A](#) [SLUFM1GU2U-A](#)