

Ceramic High Pass Filter

2500 to 6000 MHz

NEW!
HFCN-2100



BLUE CELL™

CASE STYLE: FV1206

Model	Price	Qty.
HFCN-2100	\$1.99	(10-49)
HFCN-2100D	\$2.49	(10-49)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C


*Passband rating, derate linearly to 3W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

** RF IN & RF OUT can be interchanged


Outline Drawing

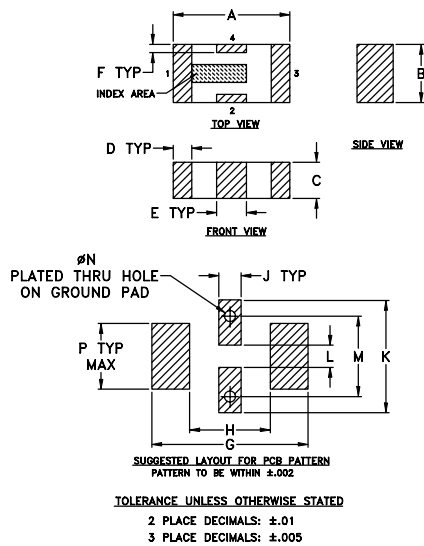

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.126	.063	.037	.024	.020	.032	.009	.169	.087	.024	.122	.024	.087	.012	.071
3.20	1.60	0.94	0.51	0.81	0.23	4.29	2.21	0.61	3.10	0.61	2.21	0.30	1.80	grams

Demo Board MCL P/N: TB-270
Suggested PCB Layout (PL-137)

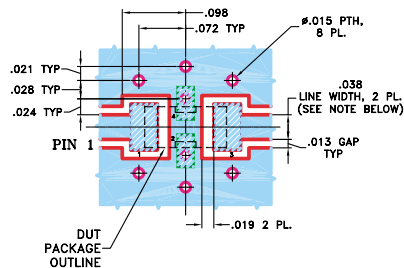

Features

- low cost
- small size
- 7 sections
- temperature stable
- excellent power handling, 7W

Applications


- sub-harmonic rejection
- transmitters/receivers
- lab use

High Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	STOP BAND (MHz) Min.	f _{co} , MHz Nom. (loss 3 dB) Typ.	PASSBAND (MHz) (loss < 1.3 dB) Max. (loss < 2 dB) Typ.	VSWR Typ. Frequency (MHz) 1.5:1 Stopband	POWER INPUT (W)	NO. OF SECTIONS
HFCN-2100	1050 1530	2100	2500-5000 2200-6000	20:1 2400-5200	7	7

1. For Applications requiring DC voltage to be applied to the Input or output, use HFCN-2100D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	87.12	>20
500.00	57.51	>20
1200.00	57.51	>20
1530.00	27.57	>20
1800.00	14.13	>20
2100.00	2.96	2.96
2500.00	0.86	1.29
3000.00	0.77	1.45
4000.00	0.67	1.39
5000.00	0.70	1.28
5681.00	1.24	1.82
6000.00	1.55	2.14
7000.00	2.69	3.34
8000.00	3.65	4.67
9000.00	4.72	6.30

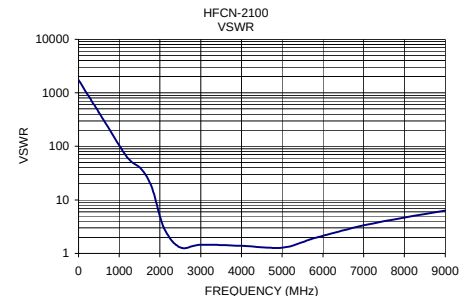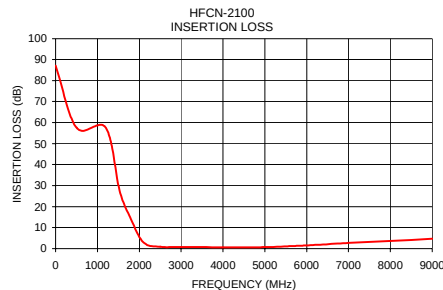

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. C
M96263
EDR-6437/5
HFCN-2100
RVN/AD/CP
050113