

3RH2131-1BB40 CONT.RELAY,3NO+1NC,DC24V

Technical / CAx data

☒ Technical Data ☐ CAx data



CONTACTOR RELAY, 3NO+1NC, DC 24V, SIZE S00,  
SCREW TERMINAL

| General technical data:                                                               |    |                        |
|---------------------------------------------------------------------------------------|----|------------------------|
| product brand name                                                                    |    | SIRIUS                 |
| Size of the contactor                                                                 |    | S00                    |
| Identification number and letter for switching elements                               |    | 31 E                   |
| Product extension / auxiliary switch                                                  |    | Yes                    |
| Protection class IP / on the front                                                    |    | IP20                   |
| Protection against electrical shock                                                   |    | finger-safe            |
| Degree of pollution                                                                   |    | 3                      |
| Insulation voltage / with degree of pollution 3 / rated value                         | V  | 690                    |
| Installation altitude / at a height over sea level / maximum                          | m  | 2,000                  |
| Ambient temperature / during storage                                                  | °C | -55...+80              |
| Ambient temperature / during operating                                                | °C | -25...+60              |
| Shock resistance                                                                      |    |                        |
| • at rectangular impulse                                                              |    |                        |
| • at DC                                                                               |    | 10g / 5 ms, 5g / 10 ms |
| • at sine pulse                                                                       |    |                        |
| • at DC                                                                               |    | 15g / 5 ms, 8g / 10 ms |
| Impulse voltage resistance / rated value                                              | kV | 6                      |
| Mechanical operating cycles as operating time                                         |    |                        |
| • of the contactor / typical                                                          |    | 30,000,000             |
| • of the contactor with added auxiliary switch block / typical                        |    | 10,000,000             |
| • of the contactor with added electronics-compatible auxiliary switch block / typical |    | 10,000,000             |
| Control circuit:                                                                      |    |                        |
| Type of voltage / of the controlled supply voltage                                    |    | DC                     |

|                                                                                       |    |           |
|---------------------------------------------------------------------------------------|----|-----------|
| <b>Control supply voltage / 1</b>                                                     | V  | 24        |
| <ul style="list-style-type: none"> <li>for DC / rated value</li> </ul>                |    |           |
| <b>Operating range factor control supply voltage rated value / of the magnet coil</b> |    | 0.8...1.1 |
| <ul style="list-style-type: none"> <li>for DC</li> </ul>                              |    |           |
| <b>Holding power / of the solenoid / for DC</b>                                       | W  | 4         |
| <b>Pull-in power / of the solenoid / for DC</b>                                       | W  | 4         |
| <b>Closing delay</b>                                                                  |    |           |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>                               | ms | 30...100  |
| <b>Opening delay</b>                                                                  |    |           |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>                               | ms | 25...90   |
| <b>Arcing time</b>                                                                    | s  | 10...15   |

#### Auxiliary circuit:

|                                                                                                              |   |                                                 |
|--------------------------------------------------------------------------------------------------------------|---|-------------------------------------------------|
| <b>Contact reliability / of the auxiliary contacts</b>                                                       |   | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>                              |   | 1                                               |
| <b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>                              |   | 3                                               |
| <b>Operating current / of the auxiliary contacts / at AC-12 / maximum</b>                                    | A | 10                                              |
| <b>Operating current / of the auxiliary contacts / at AC-15</b>                                              |   |                                                 |
| <ul style="list-style-type: none"> <li>at 230 V</li> </ul>                                                   | A | 6                                               |
| <ul style="list-style-type: none"> <li>at 400 V</li> </ul>                                                   | A | 3                                               |
| <ul style="list-style-type: none"> <li>at 500 V</li> </ul>                                                   | A | 2                                               |
| <ul style="list-style-type: none"> <li>at 690 V</li> </ul>                                                   | A | 1                                               |
| <b>Operating current</b>                                                                                     |   |                                                 |
| <ul style="list-style-type: none"> <li>of the auxiliary contacts / with 1 current path / at DC-12</li> </ul> |   |                                                 |
| <ul style="list-style-type: none"> <li>at 24 V</li> </ul>                                                    | A | 6                                               |
| <ul style="list-style-type: none"> <li>at 110 V</li> </ul>                                                   | A | 3                                               |
| <ul style="list-style-type: none"> <li>at 220 V</li> </ul>                                                   | A | 1                                               |
| <ul style="list-style-type: none"> <li>with 2 current paths in series / at DC-12</li> </ul>                  |   |                                                 |
| <ul style="list-style-type: none"> <li>at 24 V / rated value</li> </ul>                                      | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 60 V / rated value</li> </ul>                                      | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 110 V / rated value</li> </ul>                                     | A | 4                                               |
| <ul style="list-style-type: none"> <li>at 220 V / rated value</li> </ul>                                     | A | 2                                               |
| <ul style="list-style-type: none"> <li>at 440 V / rated value</li> </ul>                                     | A | 1.3                                             |
| <ul style="list-style-type: none"> <li>at 600 V / rated value</li> </ul>                                     | A | 0.65                                            |
| <ul style="list-style-type: none"> <li>with 3 current paths in series / at DC-12</li> </ul>                  |   |                                                 |
| <ul style="list-style-type: none"> <li>at 24 V / rated value</li> </ul>                                      | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 60 V / rated value</li> </ul>                                      | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 110 V / rated value</li> </ul>                                     | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 220 V / rated value</li> </ul>                                     | A | 3.6                                             |
| <ul style="list-style-type: none"> <li>at 440 V / rated value</li> </ul>                                     | A | 2.5                                             |
| <ul style="list-style-type: none"> <li>at 600 V / rated value</li> </ul>                                     | A | 1.8                                             |
| <b>Operating current</b>                                                                                     |   |                                                 |
| <ul style="list-style-type: none"> <li>of the auxiliary contacts / with 1 current path / at DC-13</li> </ul> |   |                                                 |
| <ul style="list-style-type: none"> <li>at 24 V</li> </ul>                                                    | A | 6                                               |
| <ul style="list-style-type: none"> <li>at 110 V</li> </ul>                                                   | A | 1                                               |
| <ul style="list-style-type: none"> <li>at 220 V</li> </ul>                                                   | A | 0.3                                             |
| <ul style="list-style-type: none"> <li>with 2 current paths in series / at DC-13</li> </ul>                  |   |                                                 |
| <ul style="list-style-type: none"> <li>at 24 V / rated value</li> </ul>                                      | A | 10                                              |
| <ul style="list-style-type: none"> <li>at 60 V / rated value</li> </ul>                                      | A | 3.5                                             |
| <ul style="list-style-type: none"> <li>at 110 V / rated value</li> </ul>                                     | A | 1.3                                             |

|                                                                                                                                                                                                                                                                                                                                                                                                                                     |     |        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--------|
| <ul style="list-style-type: none"> <li>at 220 V / rated value</li> <li>at 440 V / rated value</li> <li>at 600 V / rated value</li> <li>with 3 current paths in series / at DC-13 <ul style="list-style-type: none"> <li>at 24 V / rated value</li> <li>at 60 V / rated value</li> <li>at 110 V / rated value</li> <li>at 220 V / rated value</li> <li>at 440 V / rated value</li> <li>at 600 V / rated value</li> </ul> </li> </ul> | A   | 0.9    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 0.2    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 0.1    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 10     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 4.7    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 3      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 1.2    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 0.5    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | A   | 0.26   |
| <b>Off-load operating frequency</b>                                                                                                                                                                                                                                                                                                                                                                                                 |     |        |
| <ul style="list-style-type: none"> <li>at AC</li> <li>at DC</li> </ul>                                                                                                                                                                                                                                                                                                                                                              | 1/h | 10,000 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1/h | 10,000 |
| <b>Frequency of operation</b>                                                                                                                                                                                                                                                                                                                                                                                                       |     |        |
| <ul style="list-style-type: none"> <li>at AC-12 / maximum</li> <li>at AC-14 / maximum</li> <li>at AC-15 / maximum</li> <li>at DC-12 / maximum</li> <li>at DC-13 / maximum</li> </ul>                                                                                                                                                                                                                                                | 1/h | 1,000  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1/h | 1,000  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1/h | 1,000  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1/h | 1,000  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1/h | 1,000  |

#### Short-circuit:

**Design of the fuse link / for short-circuit protection of the auxiliary switch**

- required

Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current  $I_k < 400$  A)

#### Installation/mounting/dimensions:

|                                                                     |    |                                                              |
|---------------------------------------------------------------------|----|--------------------------------------------------------------|
| <b>Built in orientation</b>                                         |    | vertical                                                     |
| <b>Type of mounting</b>                                             |    | screw and snap-on mounting onto 35 mm standard mounting rail |
| <b>Width</b>                                                        | mm | 45                                                           |
| <b>Height</b>                                                       | mm | 57.5                                                         |
| <b>Depth</b>                                                        | mm | 73                                                           |
| <b>Distance, to be maintained, to the ranks assembly / sideways</b> | mm | 0                                                            |

#### Connections:

|                                                                                                                                                                                                         |  |                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------|
| <b>Design of the electrical connection</b>                                                                                                                                                              |  | screw-type terminals                                                                                           |
| <ul style="list-style-type: none"> <li>for auxiliary and control current circuit</li> </ul>                                                                                                             |  |                                                                                                                |
| <b>Type of the connectable conductor cross-section</b>                                                                                                                                                  |  |                                                                                                                |
| <ul style="list-style-type: none"> <li>for auxiliary contacts</li> <li>solid</li> </ul>                                                                                                                 |  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>                    |
| <ul style="list-style-type: none"> <li>finely stranded <ul style="list-style-type: none"> <li>with conductor end processing</li> </ul> </li> <li>for AWG conductors / for auxiliary contacts</li> </ul> |  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |

#### Certificates/approvals:

##### General Product Approval

|                                         |                                         |                                          |                                        |                                                    |
|-----------------------------------------|-----------------------------------------|------------------------------------------|----------------------------------------|----------------------------------------------------|
| <input checked="" type="checkbox"/> CCC | <input checked="" type="checkbox"/> CSA | <input checked="" type="checkbox"/> GOST | <input checked="" type="checkbox"/> UL | <input checked="" type="checkbox"/> EC-Declaration |
|-----------------------------------------|-----------------------------------------|------------------------------------------|----------------------------------------|----------------------------------------------------|

##### Declaration of Conformity

##### Test Certificates

|       |                          |                                    |
|-------|--------------------------|------------------------------------|
| other | Special Test Certificate | Type Test Certificates/Test Report |
|-------|--------------------------|------------------------------------|

##### Shipping Approval

|                                                   |                                                   |                                                  |                                                    |                                                    |                                                    |
|---------------------------------------------------|---------------------------------------------------|--------------------------------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| <input checked="" type="checkbox"/> ABS (America) | <input checked="" type="checkbox"/> DNV / Det Nor | <input checked="" type="checkbox"/> GL / Germani | <input checked="" type="checkbox"/> LRS / Lloyds R | <input checked="" type="checkbox"/> PRS / Polski R | <input checked="" type="checkbox"/> RINA / Registr |
|---------------------------------------------------|---------------------------------------------------|--------------------------------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|

| Shipping Approval                               | other                                             |
|-------------------------------------------------|---------------------------------------------------|
| <input checked="" type="checkbox"/> RMRS / Russ | <input checked="" type="checkbox"/> Household anc |

#### UL/CSA ratings:

|                                                                       |             |
|-----------------------------------------------------------------------|-------------|
| Contact rating designation / for auxiliary contacts / according to UL | A600 / Q600 |
|-----------------------------------------------------------------------|-------------|

#### Safety-related Parameter:

|                                                                                           |           |
|-------------------------------------------------------------------------------------------|-----------|
| <b>B10 value / with high demand rate</b><br>• according to SN 31920                       | 1,000,000 |
| <b>T1 value / for proof test interval or service life</b><br>• according to IEC 61508     | a 20      |
| <b>Proportion of dangerous failures</b><br>• with low demand rate / according to SN 31920 | % 40      |
| • with high demand rate / according to SN 31920                                           | % 73      |
| <b>Failure rate (FIT value) / with low demand rate</b><br>• according to SN 31920         | FIT 100   |
| <b>Product function / positively driven operation to IEC 60947-5-1</b>                    | Yes       |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator:




<http://www.siemens.com/cax>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH2131-1BB40/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RH2131-1BB40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH2131-1BB40)



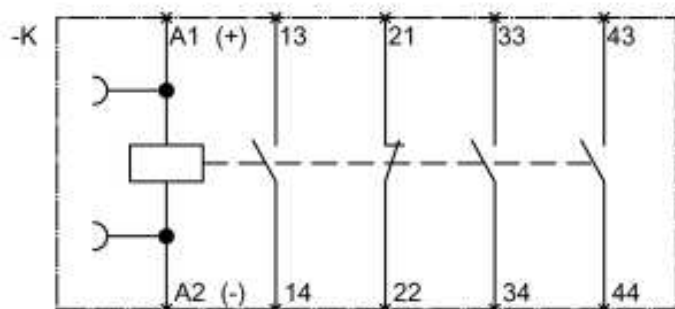

**last change:**

Mar 27, 2012