
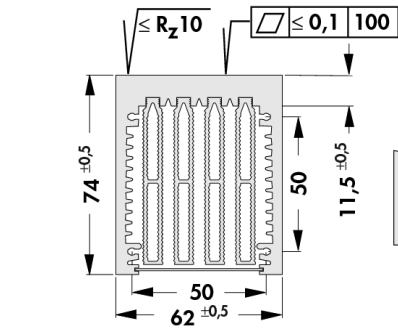


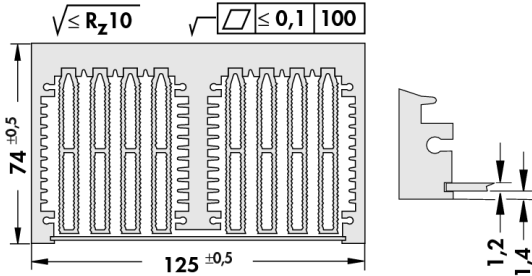


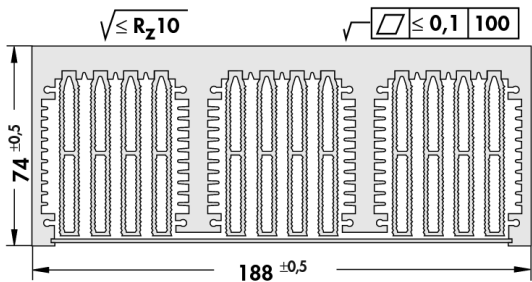



Hollow-fin cooling aggregates

- geometry of hollow fin opimising the air flow
- particularly effective heat dissipation
- compact construction
- semiconductor mounting surface for milled flat

art. no.			
LA 6 ...			
art. no.			
LA 7 ...			
art. no.			
LA 8 ...			
please indicate: ...  ... fan type			
100 150 200 250 300 mm			
12=12 V DC 24=24 V DC			

Technical data of the fans

	... 12	... 24
type	Papst, ball bearing	Papst, ball bearing
dimensions	60 x 60 x 25 mm	60 x 60 x 25 mm
voltage	12 V DC	24 V DC
power input	2.9 W	3.4 W
max. air flow	56 m³/h	46 m³/h
temperature range	-20 °C ... +70 °C	-20 °C ... +65 °C
noise level	41 dB(A)	44 dB(A)
rated speed	6,800 min ⁻¹	6,400 min ⁻¹
weight	85 g	85 g
failure rate	L ₁₀ > 60.000 h (40 °C)	L ₁₀ > 70.000 h (40 °C)