




## FUNCTIONAL APPLICATIONS

DC Blocking  
Amplifier Matching Networks  
VCO Frequency Stabilization  
Filtering and Diplexers  
Antenna Matching

## BENEFITS

Stable TC  
EIA 0603 Case Size  
SMD Compatibility  
-55 to +125 °C Operating Range

## Mechanical Specifications

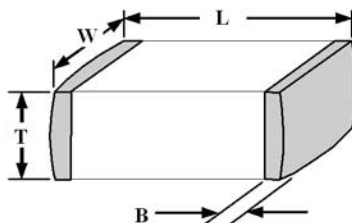

| Product Code | Body Dimensions               |                                |                          | Termination Code, Band Dimension and Material |                                                     |                             |
|--------------|-------------------------------|--------------------------------|--------------------------|-----------------------------------------------|-----------------------------------------------------|-----------------------------|
|              | Length (L)                    | Width (W)                      | Thickness (T)            | Code                                          | Band (B)                                            | Material                    |
| C06          | .063" ± .009"<br>(1.6 ± 0.23) | .031" ± .008"<br>(0.80 ± 0.20) | .031" Max<br>(0.80) Max. | Z                                             | .010" + .010"<br>- .005"<br>(.254 + .254<br>- .127) | Ni Barrier,<br>Tin Plate    |
|              |                               |                                |                          | S                                             |                                                     | Ni Barrier,<br>Au Flash     |
|              |                               |                                |                          | P                                             |                                                     | AgPd<br>Termination         |
|              |                               |                                |                          | U                                             |                                                     | Ni Barrier,<br>Solder Plate |

Laser Markings available in Horizontal orientation only, Code L.  
The MS material system is available in Z and U terminations only.  
U termination is not available in the UL material system.

## Capacitance Table

| C06 Capacitance Values |          |                  |                |          |          |                  |                |          |          |                  |                |          |          |                  |                 |
|------------------------|----------|------------------|----------------|----------|----------|------------------|----------------|----------|----------|------------------|----------------|----------|----------|------------------|-----------------|
| CAP CODE               | CAP (pF) | Cap Tol.         | Rated WVDC     | CAP CODE | CAP (pF) | Cap Tol.         | Rated WVDC     | CAP CODE | CAP (pF) | Cap Tol.         | Rated WVDC     | CAP CODE | CAP (pF) | Cap Tol.         | Rated WVDC      |
| 0R1                    | 0.1      | A<br>B<br>C<br>D | 250V<br>Code 9 | 0R9      | 0.9      | A<br>B<br>C<br>D | 250V<br>Code 9 | 3R9      | 3.9      | A<br>B<br>C<br>D | 250V<br>Code 9 | 240      | 24       | F<br>G<br>J<br>K | 250V*<br>Code 9 |
| R15                    | 0.15     |                  |                | R95      | 0.95     |                  |                | 4R3      | 4.3      |                  |                | 270      | 27       |                  |                 |
| 0R2                    | 0.2      |                  |                | 1R0      | 1.0      |                  |                | 4R7      | 4.7      |                  |                | 300      | 30       |                  |                 |
| R25                    | 0.25     |                  |                | 1R1      | 1.1      |                  |                | 5R1      | 5.1      |                  |                | 330      | 33       |                  |                 |
| 0R3                    | 0.3      |                  |                | 1R2      | 1.2      |                  |                | 5R6      | 5.6      |                  |                | 360      | 36       |                  |                 |
| R35                    | 0.35     |                  |                | 1R3      | 1.3      |                  |                | 6R2      | 6.2      |                  |                | 390      | 39       |                  |                 |
| 0R4                    | 0.4      |                  |                | 1R5      | 1.5      |                  |                | 6R8      | 6.8      |                  |                | 430      | 43       |                  |                 |
| R45                    | 0.45     |                  |                | 1R6      | 1.6      |                  |                | 7R5      | 7.5      |                  |                | 470      | 47       |                  |                 |
| 0R5                    | 0.5      |                  |                | 1R8      | 1.8      |                  |                | 8R2      | 8.2      |                  |                | 510      | 51       |                  |                 |
| R55                    | 0.55     |                  |                | 2R0      | 2.0      |                  |                | 9R1      | 9.1      |                  |                | 560      | 56       |                  |                 |
| 0R6                    | 0.6      |                  |                | 2R2      | 2.2      |                  |                | 100      | 10       |                  |                | 620      | 62       |                  |                 |
| R65                    | 0.65     |                  |                | 2R4      | 2.4      |                  |                | 120      | 12       |                  |                | 680      | 68       |                  |                 |
| 0R7                    | 0.7      |                  |                | 2R7      | 2.7      |                  |                | 150      | 15       |                  |                | 750      | 75       |                  |                 |
| R75                    | 0.75     |                  |                | 3R0      | 3.0      |                  |                | 180      | 18       |                  |                | 820      | 82       |                  |                 |
| 0R8                    | 0.8      |                  |                | 3R3      | 3.3      |                  |                | 200      | 20       |                  |                | 101      | 100      |                  |                 |
| R85                    | 0.85     |                  |                | 3R6      | 3.6      |                  |                | 220      | 22       |                  |                |          |          |                  |                 |

\*MS capacitors in the cap range 36pF to 47pF are 150V rated, Code 8.

Cap values in **red** are available in MS only, in **blue** available in UL, CF, and AH only.

## Electrical Specifications

| Dielectric Material Code | Temperature Coefficient (ppm/°C Maximum) | Dissipation Factor (% @ 1MHz Maximum) | Dielectric Withstanding Voltage |                   | Insulation Resistance (MΩ Minimum) |                 | Aging | Piezoelectric Effects | Dielectric Absorption |
|--------------------------|------------------------------------------|---------------------------------------|---------------------------------|-------------------|------------------------------------|-----------------|-------|-----------------------|-----------------------|
|                          |                                          |                                       | Voltage Rating (Volts)          | DWV (Volts)       | @ +25°C                            | @ +125°C        |       |                       |                       |
| CF                       | 0 ± 15                                   | 0.05                                  | 250                             | 625               | 10 <sup>6</sup>                    | 10 <sup>5</sup> | None  | None                  | None                  |
| UL                       | 0 ± 30                                   | 0.05                                  | 250                             | 625               | 10 <sup>5</sup>                    | 10 <sup>4</sup> |       |                       |                       |
| MS                       | 0 ± 30                                   | 0.05                                  | 250<br>100<br>50                | 625<br>250<br>125 | 10 <sup>5</sup>                    | 10 <sup>4</sup> |       |                       |                       |


| Tolerance Codes |           |
|-----------------|-----------|
| Code            | Tolerance |
| A               | ± 0.05pF  |
| B               | ± 0.10pF  |
| C               | ± 0.25pF  |
| F               | ± 1%      |
| G               | ± 2%      |
| J               | ± 5%      |
| K               | ± 10%     |




# C06 0603



Q vs. Capacitance at Frequencies

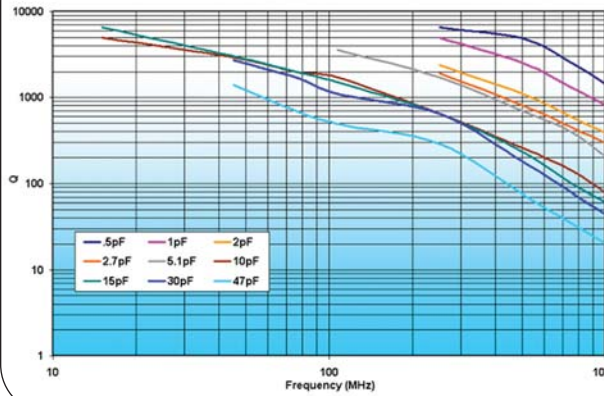

C06 Resonance vs. Capacitance

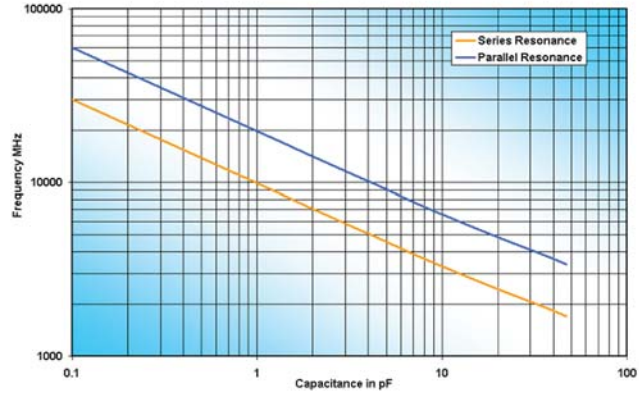

## C06 ENGINEERING KIT

20 Pieces Each of 23 Values

| CODE | CAP   |
|------|-------|
| 0R3  | 0.3pF |
| 0R5  | 0.5pF |
| 1R0  | 1.0pF |
| 1R2  | 1.2pF |
| 1R5  | 1.5pF |
| 1R8  | 1.8pF |
| 2R0  | 2.0pF |
| 2R2  | 2.2pF |
| 2R7  | 2.7pF |
| 3R3  | 3.3pF |
| 3R9  | 3.9pF |
| 4R7  | 4.7pF |
| 5R6  | 5.6pF |
| 6R8  | 6.8pF |
| 100  | 10pF  |
| 120  | 12pF  |
| 150  | 15pF  |
| 180  | 18pF  |
| 220  | 22pF  |
| 270  | 27pF  |
| 330  | 33pF  |
| 470  | 47pF  |
| 560  | 56pF  |
| 680  | 68pF  |
| 820  | 82pF  |
| 101  | 100pF |

C08BLBB1X5UX 2400pF Block

## C06 DESIGNER KIT

| KIT C | KIT D | KIT E |
|-------|-------|-------|
| 0R1   | 1R2   | 6R8   |
| 0R2   | 1R5   | 8R2   |
| 0R3   | 1R8   | 9R1   |
| 0R4   | 2R2   | 100   |
| 0R5   | 2R7   | 120   |
| 0R6   | 3R3   | 150   |
| 0R7   | 3R9   | 220   |
| 0R8   | 4R7   | 270   |
| 0R9   | 5R1   | 360   |
| 1R0   | 5R6   | 470   |



DLI reserves the right to substitute values as required. Customer may request particular cap value and material for sample kit to prove designs.

Need capacitor performance profile???  
Download your free Capcad™ modeling  
Software off DLI web homepage.  
[www.dilabs.com](http://www.dilabs.com)

**Capcad™**  
Capacitor Modeling Software

Dielectric Laboratories



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Dielectric Laboratories:

[C06UL0R8B-9ZN-X1T](#) [C06UL300J-9ZN-X1T](#) [C06UL330J-9ZN-X1T](#) [C06UL2R7B-9ZN-X1T](#) [C06UL5R6B-9ZN-X1T](#)  
[C06UL1R5B-9ZN-X1T](#) [C06UL2R0B-9ZN-X1T](#) [C06UL0R3B-9ZN-X1T](#) [C06UL1R0B-9ZN-X1T](#) [C06UL9R1B-9ZN-X1T](#)  
[C06UL0R6B-9ZN-X1T](#) [C06UL0R5B-9ZN-X1T](#) [C06UL3R3B-9ZN-X1T](#) [C06UL0R7B-9ZN-X1T](#) [C06UL4R7B-9ZN-X1T](#)  
[C06UL0R9B-9ZN-X1T](#) [C06UL1R2B-9ZN-X1T](#) [C06UL3R9B-9ZN-X1T](#) [C06UL0R4B-9ZN-X1T](#) [C06UL6R8B-9ZN-X1T](#)  
[C06UL120J-9ZN-X1T](#) [C06UL0R2B-9ZN-X1T](#) [C06CF240J-9UN-X1T](#) [C06CF0R6B-9UN-X1T](#) [C06CF300J-9UN-X1T](#)  
[C06CF180J-9UN-X1T](#) [C06CF5R6B-9UN-X1T](#) [C06CFR55B-9UN-X1T](#) [C06CF3R6B-9UN-X1T](#) [C06CF0R4B-9UN-X1T](#)  
[C06CF220J-9UN-X1T](#) [C06CF1R5B-9UN-X1T](#) [C06CF0R1B-9UN-X1T](#) [C06CFR85B-9UN-X1T](#) [C06CF0R5B-9UN-X1T](#)  
[C06CF5R1B-9UN-X1T](#) [C06CF100J-9UN-X1T](#) [C06CF270J-9UN-X1T](#) [C06CF3R3B-9UN-X1T](#) [C06CF330J-9UN-X1T](#)  
[C06CF0R7B-9UN-X1T](#) [C06CF0R3B-9UN-X1T](#) [C06CF8R2B-9UN-X1T](#) [C06CFR25B-9UN-X1T](#) [C06CF2R2B-9UN-X1T](#)  
[C06CF1R3B-9UN-X1T](#) [C06CF360J-9UN-X1T](#) [C06CFR65B-9UN-X1T](#) [C06CF2R0B-9UN-X1T](#) [C06CF2R4B-9UN-X1T](#)  
[C06CF120J-9UN-X1T](#) [C06CFR75B-9UN-X1T](#) [C06CFR15B-9UN-X1T](#) [C06CF1R1B-9UN-X1T](#) [C06CF470J-9UN-X1T](#)  
[C06CF390J-9UN-X1T](#) [C06CF200J-9UN-X1T](#) [C06CF0R8B-9UN-X1T](#) [C06CF4R3B-9UN-X1T](#) [C06CF6R2B-9UN-X1T](#)  
[C06CF0R9B-9UN-X1T](#) [C06CF430J-9UN-X1T](#) [C06CFR95B-9UN-X1T](#) [C06CF3R9B-9UN-X1T](#) [C06CF4R7B-9UN-X1T](#)  
[C06CF9R1B-9UN-X1T](#) [C06CF1R2B-9UN-X1T](#) [C06CF2R7B-9UN-X1T](#) [C06CFR35B-9UN-X1T](#) [C06CF7R5B-9UN-](#)  
[X1T](#) [C06CF6R8B-9UN-X1T](#) [C06CF1R8B-9UN-X1T](#) [C06CFR45B-9UN-X1T](#) [C06CF1R0B-9UN-X1T](#) [C06CF0R2B-](#)  
[9UN-X1T](#) [C06CF150J-9UN-X1T](#) [C06CF3R0B-9UN-X1T](#) [C06CF0R2B-9ZN-X1T](#) [C06CF0R3B-9ZN-X1T](#) [C06CF0R4B-](#)  
[9ZN-X1T](#) [C06CF0R5B-9ZN-X1T](#) [C06CF0R6B-9ZN-X1T](#) [C06CF0R7B-9ZN-X1T](#) [C06CF0R8B-9ZN-X1T](#) [C06CF3R9B-](#)  
[9ZN-X1T](#) [C06CF4R7B-9ZN-X1T](#) [C06CF5R6B-9ZN-X1T](#) [C06CF6R8B-9ZN-X1T](#) [C06CF9R1B-9ZN-X1T](#) [C06CF0R9B-](#)  
[9ZN-X1T](#) [C06CF1R0B-9ZN-X1T](#) [C06CF1R2B-9ZN-X1T](#) [C06CF1R5B-9ZN-X1T](#) [C06CF2R0B-9ZN-X1T](#) [C06CF2R7B-](#)  
[9ZN-X1T](#) [C06CF3R3B-9ZN-X1T](#) [C06CF120J-9ZN-X1T](#) [C06CF300J-9ZN-X1T](#) [C06CF330J-9ZN-X1T](#) [C06CF1R1D-](#)  
[9UN-X1T](#)