








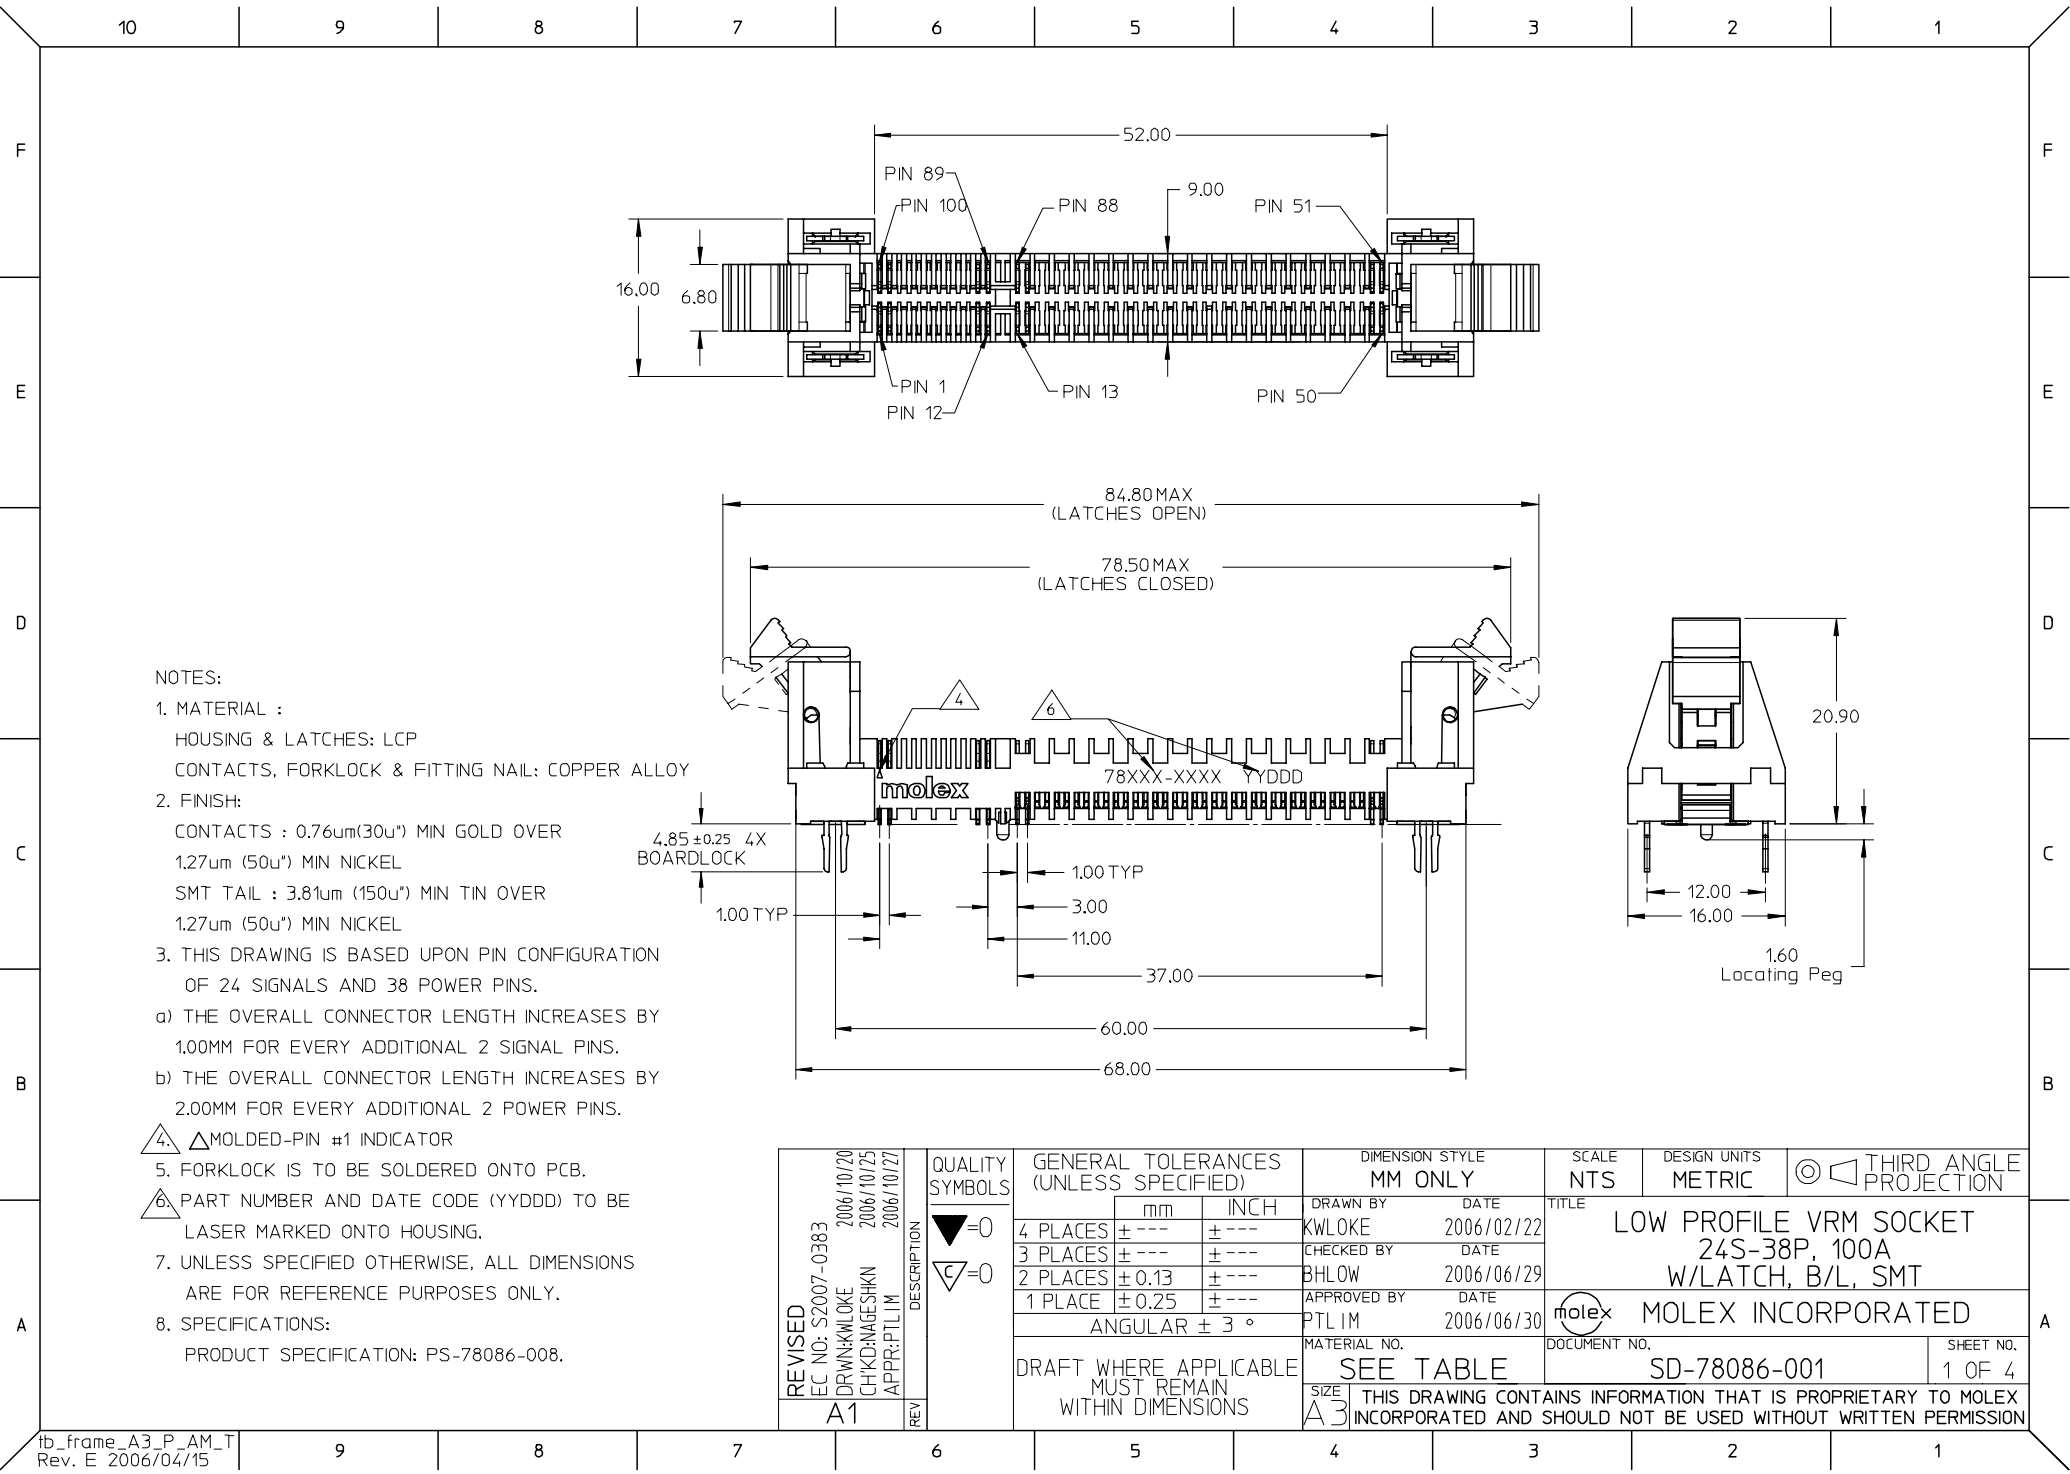


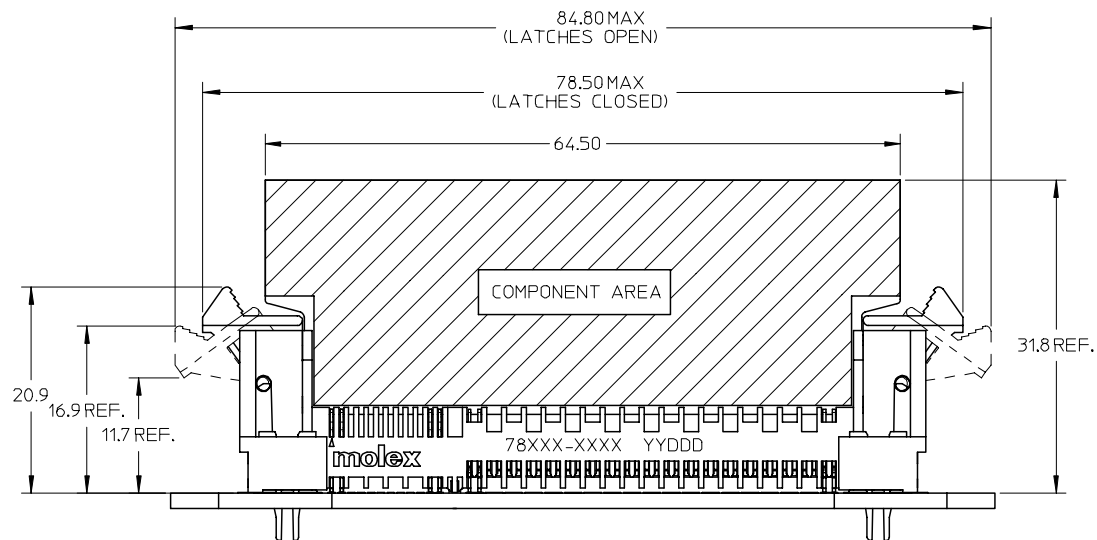

REVISED EC NO: S2007-0383 2006/10/20 DRAWN: KWLOKE CHKD: NAGESHKN APPR: PTL IM 2006/10/27	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		DESCRIPTION REV	REV	4 PLACES 3 PLACES 2 PLACES 1 PLACE ANGULAR ± 3 °	DRAWN BY KWLOKE CHECKED BY BHLOW APPROVED BY PTL IM DATE 2006/02/22 2006/06/29 2006/06/30	DATE	TITLE LOW PROFILE VRM SOCKET 24S-38P, 100A W/LATCH, B/L, SMT MOLEX INCORPORATED	DOCUMENT NO. SD-78086-001	SHEET NO. 2 OF 4
A1		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

NOTES:

1. OPPOSING POWER PADS MUST BE OF THE SAME POLARITY.
2. APPLICATION NOTE:
EDGE OF CONTACT PADS SHALL BE FREE OF BURRS AND EXTERNAL TIE BARS.

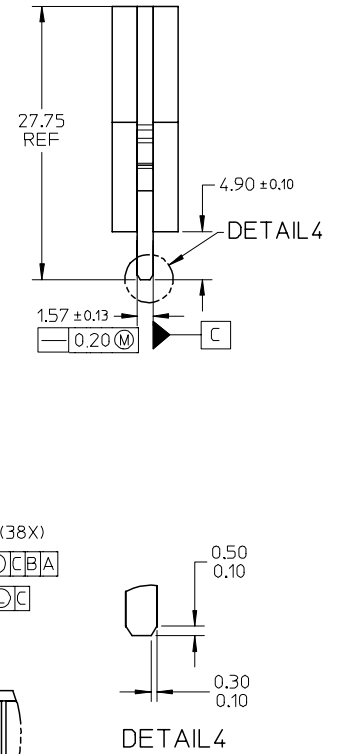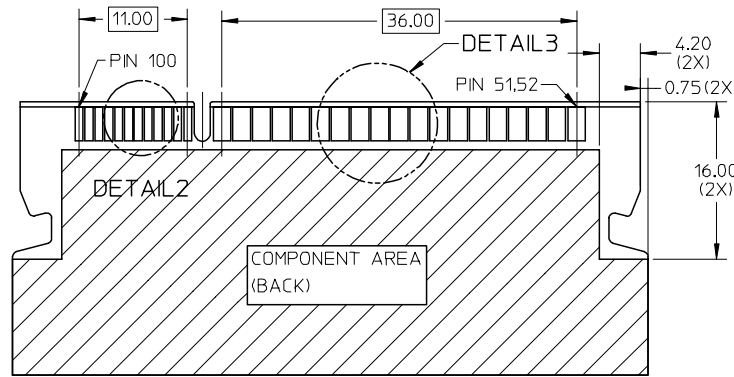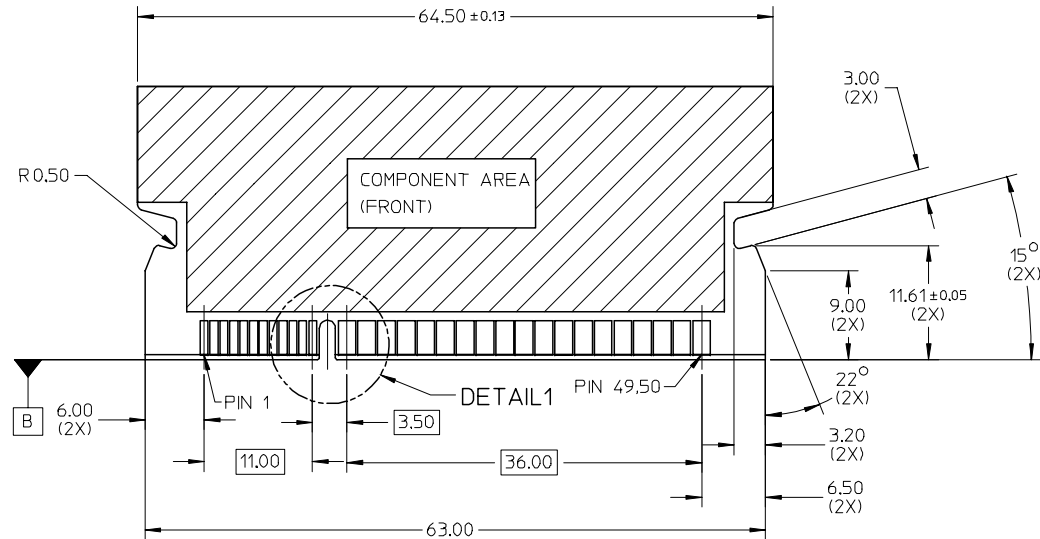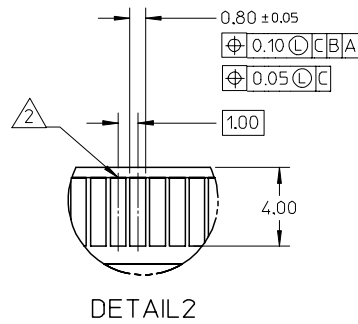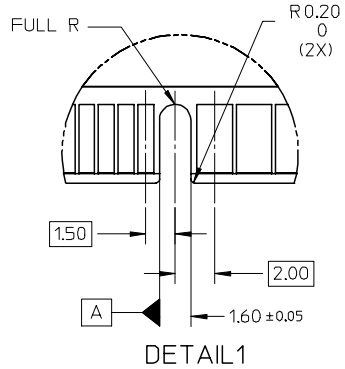

REVISED EC NO: S2007-0383 DRWN:KWLOKE CHKD:NAJESHKN APPR:PTL IM A1	2006/10/20 2006/10/25 2006/10/27	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY KWLOKE	DATE 2006/02/22	TITLE LOW PROFILE VRM SOCKET 24S-38P, 100A W/LATCH, B/L, SMT			
				4 PLACES ± ---	± ---	CHECKED BY	DATE				
				3 PLACES ± ---	± ---	BHLOW	2006/06/29	MOLEX INCORPORATED			
				2 PLACES ± 0.13	± ---	APPROVED BY	DATE				
				1 PLACE ± 0.25	± ---	PTL IM	2006/06/30	SD-78086-001			
				ANGULAR ± 3 °		MATERIAL NO.	DOCUMENT NO.				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				SIZE A3							

