

High bright circular LED lamps ($\phi 3$, $\phi 3.1\text{mm}$)


SLA-360 / SLA-370 Series

The SLA-360 and SLA-370 series are high luminance LEDs which give you a choice of narrow to wide viewing angles. One red type and one green type are available in two packages for a total of four different types, and they are suitable for use in a wide variety of applications.

●Features

- 1) Very bright.
- 2) Ideal for outdoor and semi-outdoor applications.
- 3) High reliability.

●External dimensions (Units : mm)

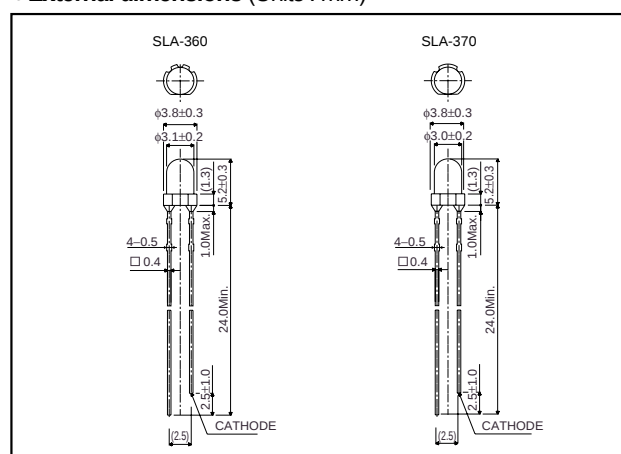

●Selection guide

Lens	Emitting color	Single-hetero GaAlAs (red)	GaP (green)
Medium viewing type		SLA-370LT3F	SLA-370MT3F
Wide viewing type		SLA-360LT3F	SLA-360MT3F

●Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Red	Green	Unit
		SLA-360LT3F SLA-370LT3F	SLA-360MT3F SLA-370MT3F	
Power dissipation	P _D	100	75	mW
Forward current	I _F	50	25	mA
Peak forward current	I _{FP}	75	60	mA
Reverse voltage	V _R	4	4	V
Operating temperature	T _{opr}	-25~+85		°C
Storage temperature	T _{stg}	-30~+100		°C
Soldering temperature	—	260°C 5 seconds maximum		—

LED lamps

●Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=20\text{mA}$	—	1.75	2.5	—	2.2	3.0	V
Reverse current	I_R	$V_R=4\text{V}$	—	—	100	—	—	10	μA
Peak wavelength	λ_P	$I_F=20\text{mA}$	—	660	—	—	563	—	nm
Spectral line half width	$\Delta\lambda$	$I_F=20\text{mA}$	—	25	—	—	40	—	nm
Viewing angle	SLA-360	$2\theta_{1/2}$	—	—	40	—	40	—	deg
	SLA-370								

●Luminous intensity vs. wavelength

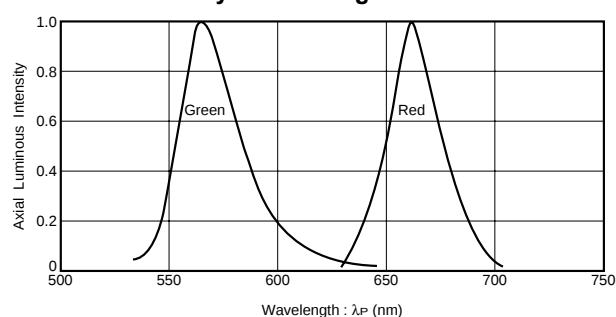

●Luminous intensity



Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	660	SLA-360LT3F	30	68	—	mcd
		SLA-370LT3F	42	100	—	
Green	563	SLA-360MT3F	42	100	—	
		SLA-370MT3F	42	100	—	

Note : 1. Measured at $I_F=20\text{mA}$

2. The specification is subject to be without notice.

We would like you to refer to the latest specification in use.

●Directional pattern

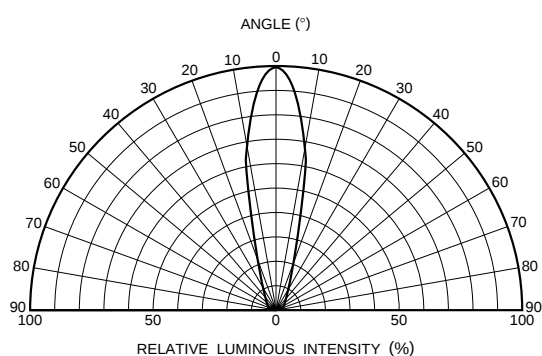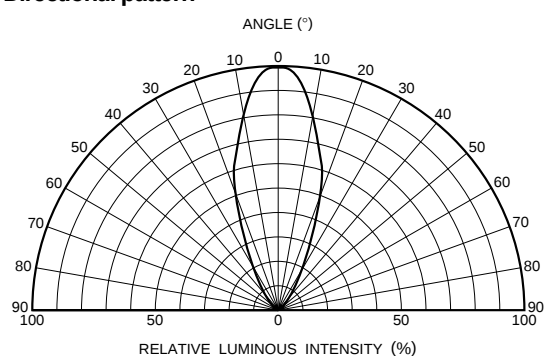

LED lamps

●Electrical characteristic curves 1 (red)

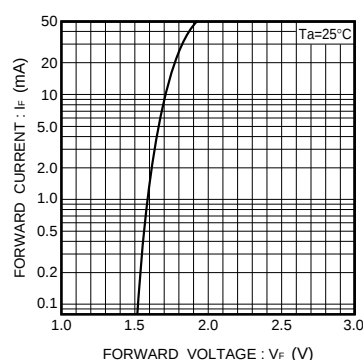


Fig.4 Forward current vs. forward voltage

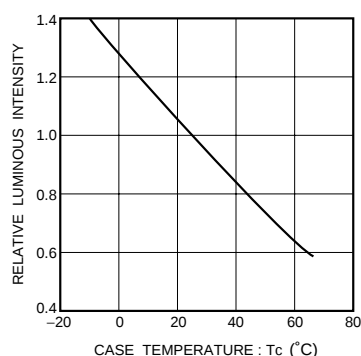


Fig.5 Luminous intensity vs. case temperature

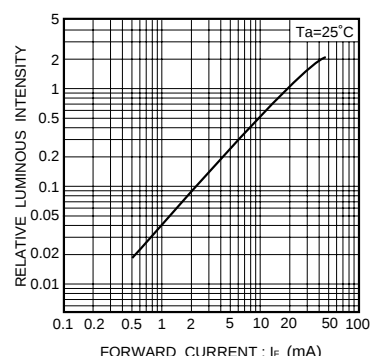


Fig.6 Luminous intensity vs. forward current

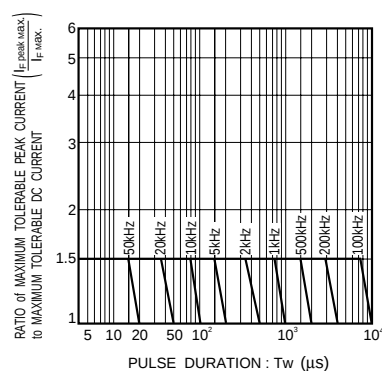


Fig.7 Maximum tolerable peak current vs. pulse duration

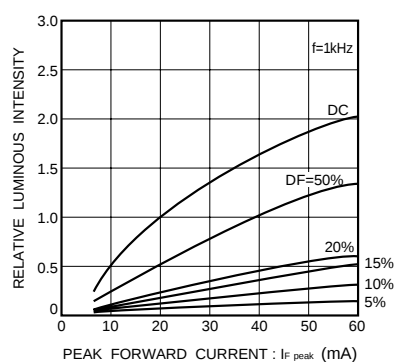


Fig.8 Luminous intensity vs. peak forward current

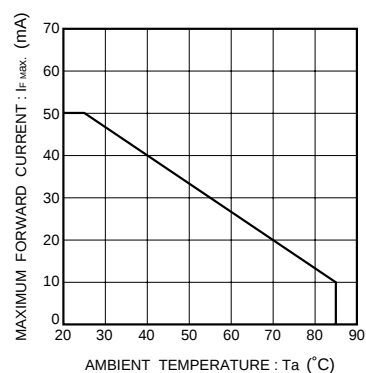


Fig.9 Maximum forward current vs. ambient temperature (Derating)

●Electrical characteristic curves 2 (green)

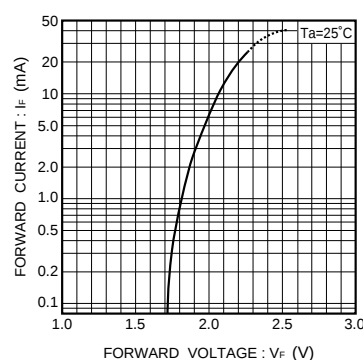


Fig.10 Forward current vs. forward voltage

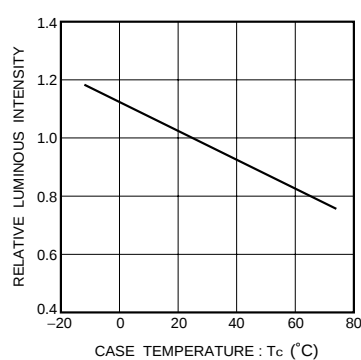


Fig.11 Luminous intensity vs. case temperature

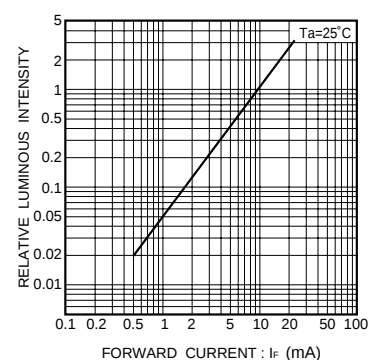


Fig.12 Luminous intensity vs. forward current

LED lamps

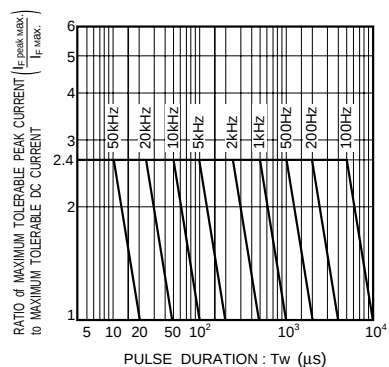


Fig.13 Maximum tolerable peak current vs. pulse duration

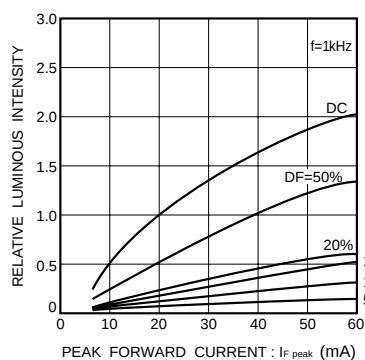


Fig.8 Luminous intensity vs. peak forward current

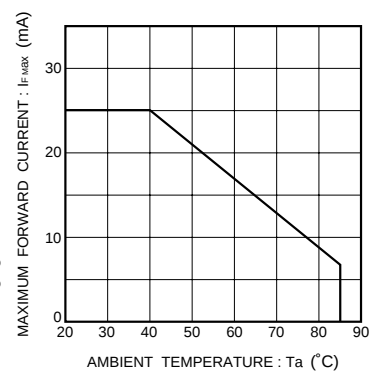


Fig.15 Maximum forward current vs. ambient temperature (Derating)