

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		B	REVISED PER ECO-08-007327	02OCT08	BM	WM

D

C

B

A

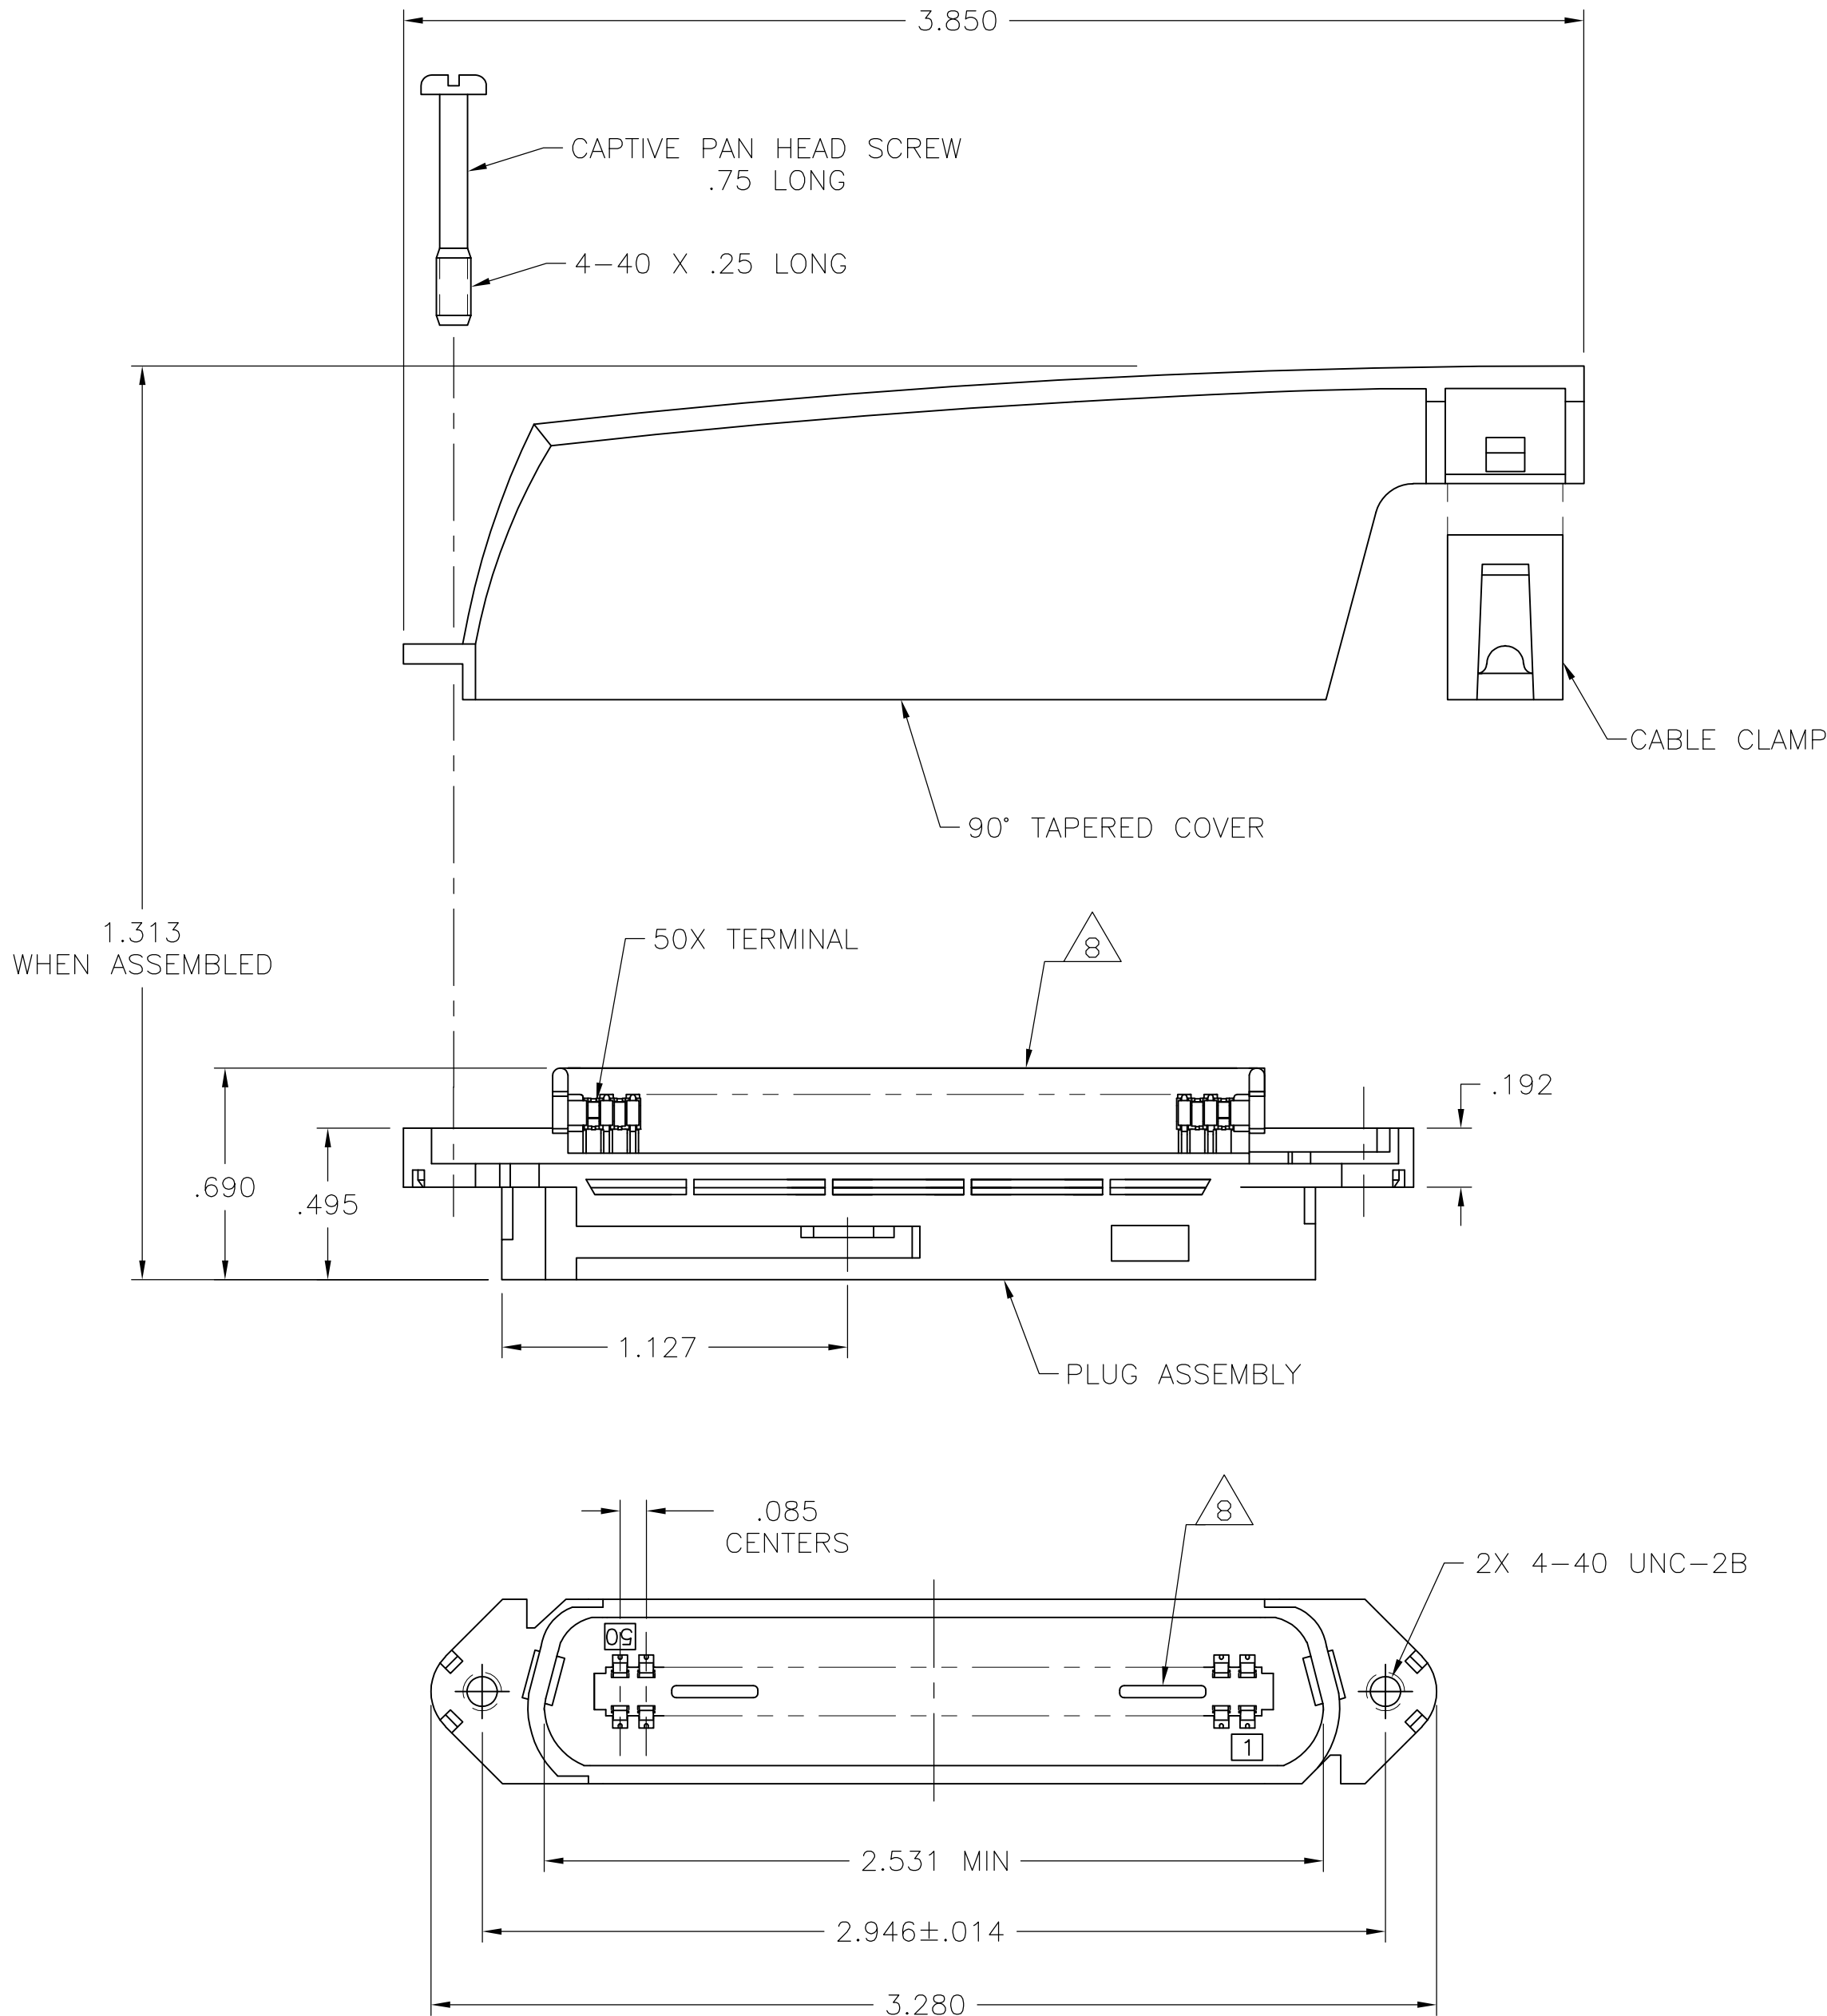

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- 2 MATERIAL:
HOUSING, COVER, AND CABLE CLAMP: THERMOPLASTIC.
TERMINALS: PHOS BRONZE
HARDWARE: STEEL.
- 3 FINISH:
TERMINALS: .000030 MIN GOLD OR GOLD FLASH OVER
PALLADIUM NICKEL PLATE .000030 MIN TOTAL ON
MATING SURFACE, OVER .000050 MIN NICKEL UNDERPLATE.
HARDWARE: ZINC PLATED.
4. THIS KIT SHIPPED UNNASSEMBLED.
5. WIRE SIZE: 22 AWG SOLID OR 22 AWG, 7 STRANDS OF
COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF .045
IS ACCEPTABLE FOR MOST APPLICATIONS.
- 6 ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE
SPECIFIED.
7. KIT SHIPPED IN POLY BAG FORM.
- 8 CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION
OF AMP.

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. MCMASTER	30SEP05	 Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608					
			CHK W. MILLHIMES	30SEP05						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. MILLHIMES	30SEP05	NAME				
		0 PLC ± -		PRODUCT SPEC		PLUG KIT, 50 POSITION, C-SLOT, SCREW LOCK WITH TAPERED COVER, CHAMP-LOK				
		1 PLC ± -		—						
		2 PLC ± -		APPLICATION SPEC						
		3 PLC ± -		—						
4 PLC ± -		ANGLES ± -		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		FINISH		—		A2	00779	C-5552382	—	
				CUSTOMER DRAWING				SCALE	SHEET	REV
								2:1	1 of 1	B

5552382