

SR32 THRU SR39


MINI SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE - 20 to 90 Volts CURRENT - 3.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

SMB/DO-214AA

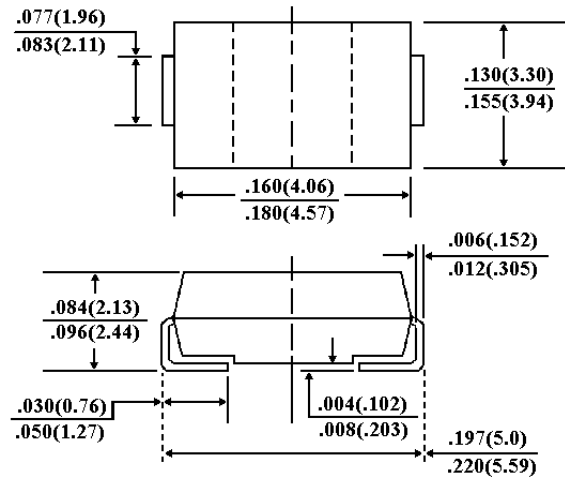

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 12mm tape (EIA-481)

Weight: 0.003 ounce, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SR32	SR33	SR34	SR35	SR36	SR38	SR39	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	90	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	64	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	90	Volts
Maximum Average Forward Rectified Current at T _L (See Figure 1)	I _(AV)	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	80							Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V _F	0.50			0.70		0.85		Volts
Maximum DC Reverse Current T _A =25 ºC (Note 1)	I _R	0.5							mA
At Rated DC Blocking Voltage T _A =100 ºC		20.0							
Maximum Thermal Resistance (Note 2)	R _{θKJL} R _{θKJA}	17 55							ºC/W
Operating Junction Temperature Range	T _J	-50 to +125							ºC
Storage Temperature Range	T _{STG}	-50 to +150							ºC

NOTES:

1. Pulse Test with PW=300 µs sec, 2% Duty Cycle.
2. Mounted on P.C.Board with 5.0mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SR32 THRU SR39

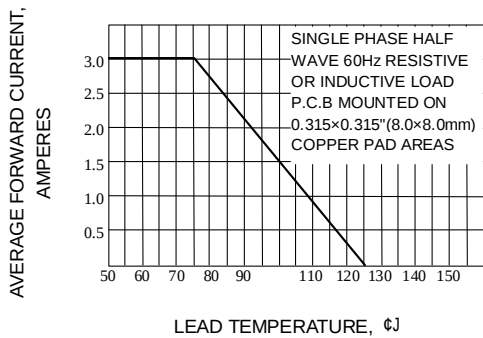


Fig. 1-FORWARD CURRENT DERATING CURVE

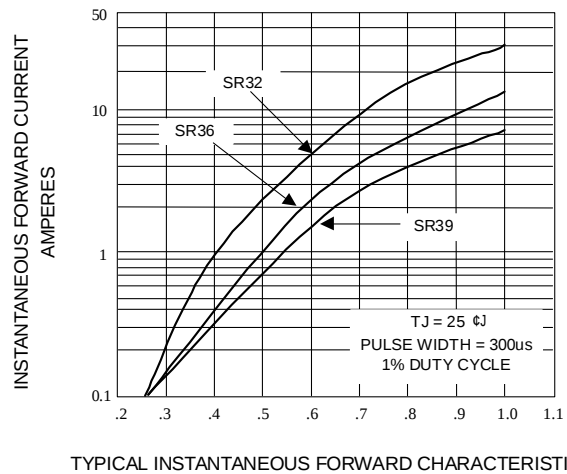


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

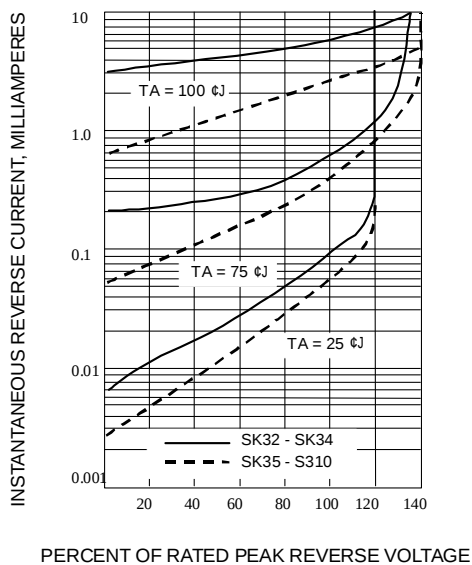


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

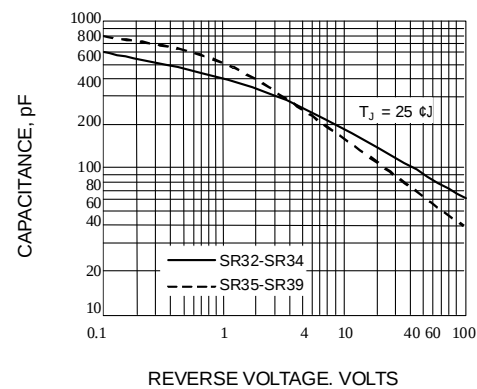


Fig. 4-TYPICAL JUNCTION CAPACITANCE

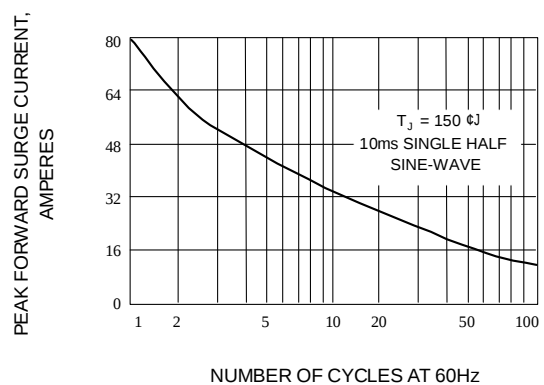


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT