

Digital Forge Gauges

✓ Push/Pull measurements in kg, lbs, oz and Newton units
On 5-digit LCD with reversable display feature to match viewing angle

Features:


- Exclusive load cell measurement transducer
- Overrange, low battery and advanced function indication
- Zero Adjust push-button and Peak Hold switch
- Selectable fast/slow response
- Complete with hook adaptor for tension, compression adaptors (flat, cone and chisel head), 5" extension rod, 6 AA batteries and carrying case

Two Models to choose from:

- **Model 475040** features 5000g, 176 oz. and 49 Newtons measurement capacity. Added features include Newton units, reversible display and fast/slow response mode
- **Model 475044** features 20 kg, 44 lbs and 196 Newtons push/pull measurement capacity with same added features as 475040

Applications:

- Ideal for a wide variety of applications in the electronics, automotive, chemical, plastics and machinery industries

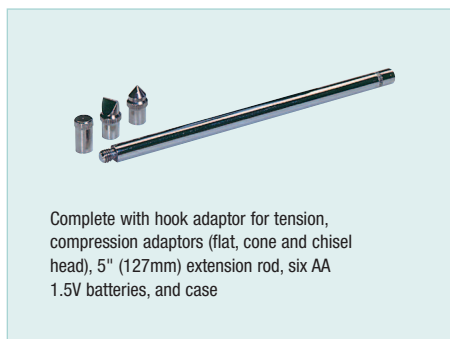

Ordering Information:

475040Digital Force Gauge
475040-NIST475040 with Calibration Traceable to NIST
475044High Capacity Force Gauge
475044-NIST475044 with Calibration Traceable to NIST
479097Accessory Kit (2ea.-hook, flat, cone, & chisel head adaptors)
475001Hook Adaptor
153117120V AC Adaptor

Specifications	475040	475044
Range	176 oz, 5000g, 49 Newtons	44 lbs, 20kg, 196 Newtons
Accuracy (23°C)	±(0.4% + 1 digit)	±(0.5% + 2 digit)
Resolution	0.05oz, 1g, 0.01 Newtons	0.01lbs, 0.01kg, 0.05 Newtons
Overload capacity	10kg	30kg
Display	5 digits, 0.4" (10mm) LCD display	
Update Rate	Fast mode 0.2 secs; Slow mode 0.6 secs.	
Full scale deflection	2.00mm	
Transducer type	Load cell	
Peak Hold	Freezes Max reading on display	
Power Supply	Six 1.5V AA (UM-3) batteries or DC 9V adaptor (not included)	
Weight	1.2 lbs (551g)	
Size	8.9 x 3.3 x 1.5" (227 x 83 x 39mm)	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Extech:

[475044](#) [475040](#) [475040-NIST](#) [475044-NIST](#)