

CATALOG LISTING
1LS6
PAGE 1 OF 1

REPLACES
RELEASE NO.

DRAWING
NUMBER
18

ISSUE

REVISIONS









A	CO-95463-B	DLT	7 SEP 99
B	ECO-200178	CST	5 APR 00

FORMTEK
-50378-003

DRAWN
OMW 18 FEB 64

CHECK
DAW 20 MAR 64

CHECK
64

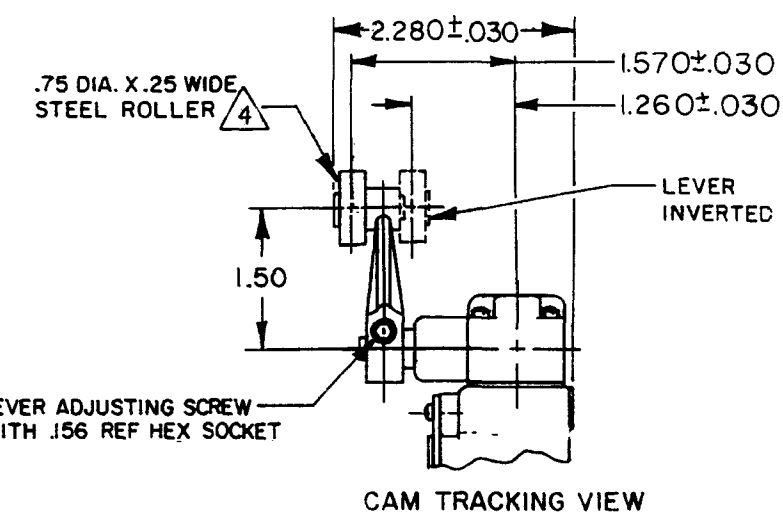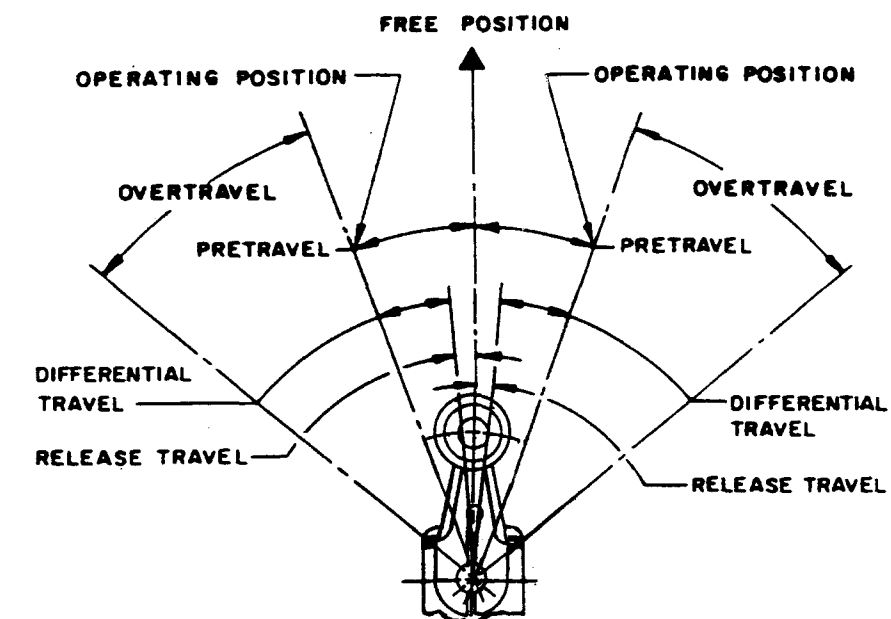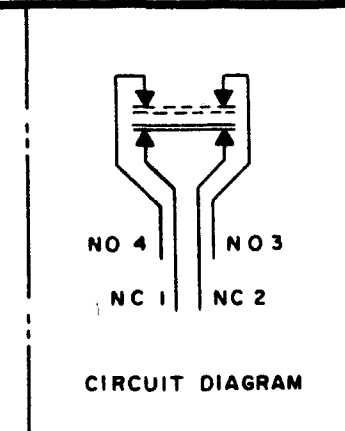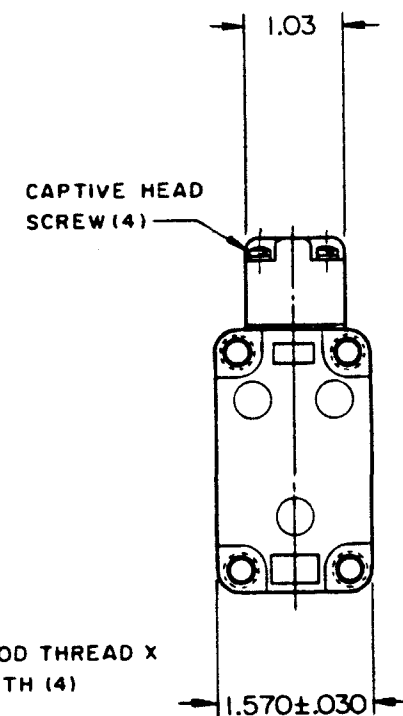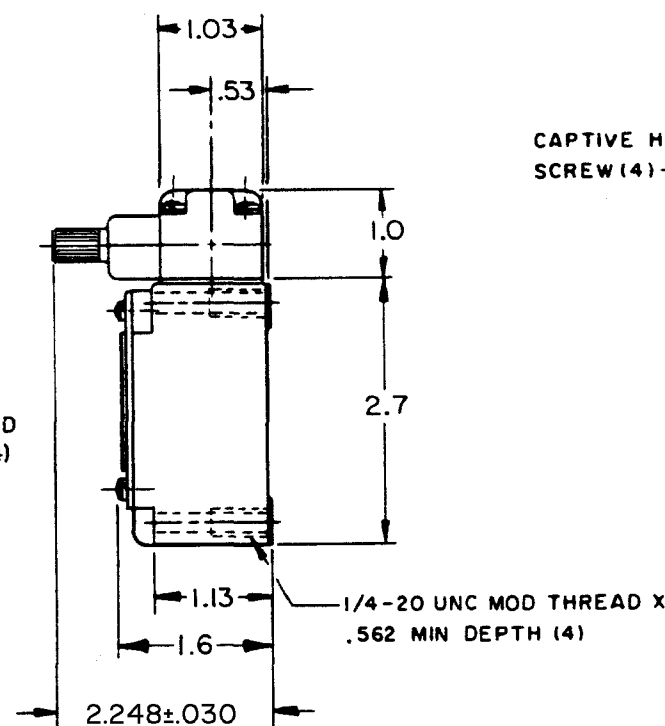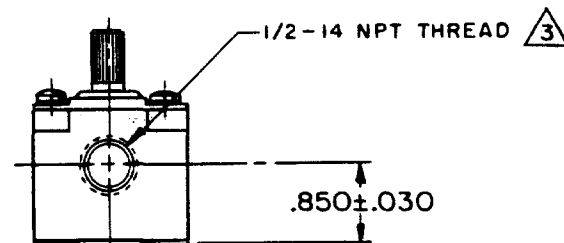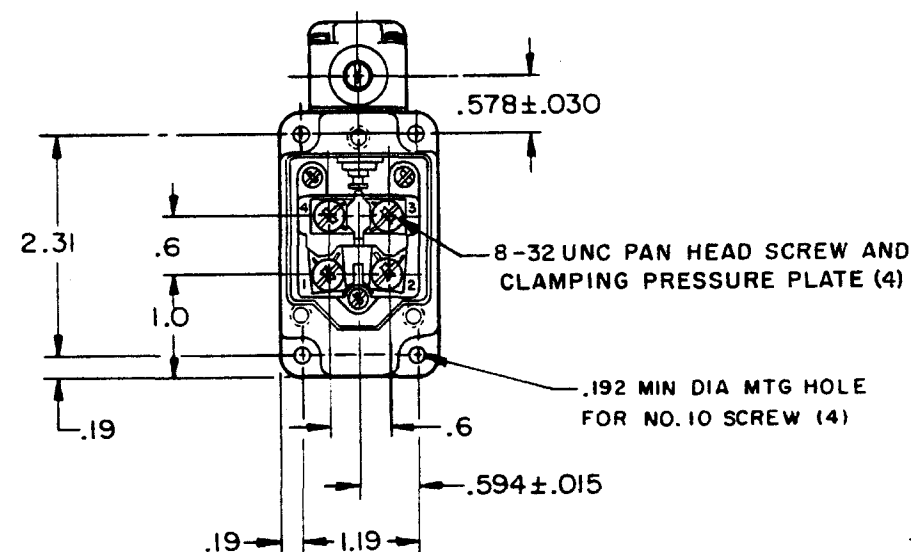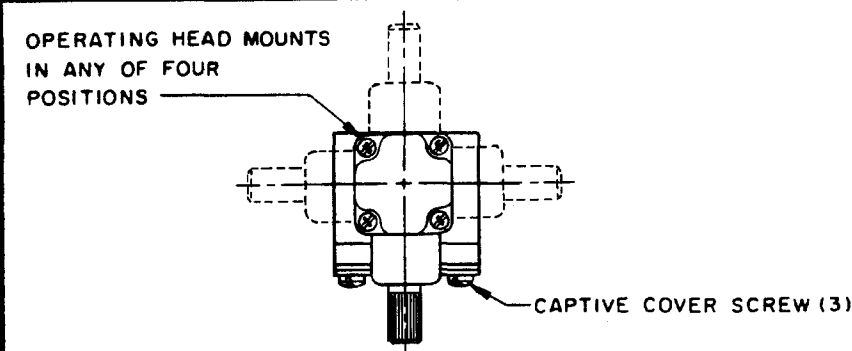

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE - - - - -27 IN-OZ MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE - -36 IN-OZ MAX	10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC	UNLESS OTHERWISE NOTED
RELEASE TORQUE - - - - -4.5 IN-OZ MIN	3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC	DIMENSIONS ARE IN INCHES
PRETRAVEL - - - - -20° MAX	.1A - 550 VDC	TOLERANCES ARE:
DIFFERENTIAL TRAVEL - - - -12° MAX	2.0/1 DUTY, 600 VAC MAX	ONE PLACE (.0) ±.030
OVERTRAVEL - - - - -30° MIN		TWO PLACE (.00) ±.015
RELEASE TRAVEL - - - - -5° MIN		THREE PLACE (.000) ±.005
SWITCH-BASIC REPLACEMENT - - -2 MNI		ANGLES ±
		WEIGHT

- NOTES
- 1-SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
 - 2-TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION
 - 3- SEAL TO BE FURNISHED BY USER
 - 4- ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
 - 5- LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX