


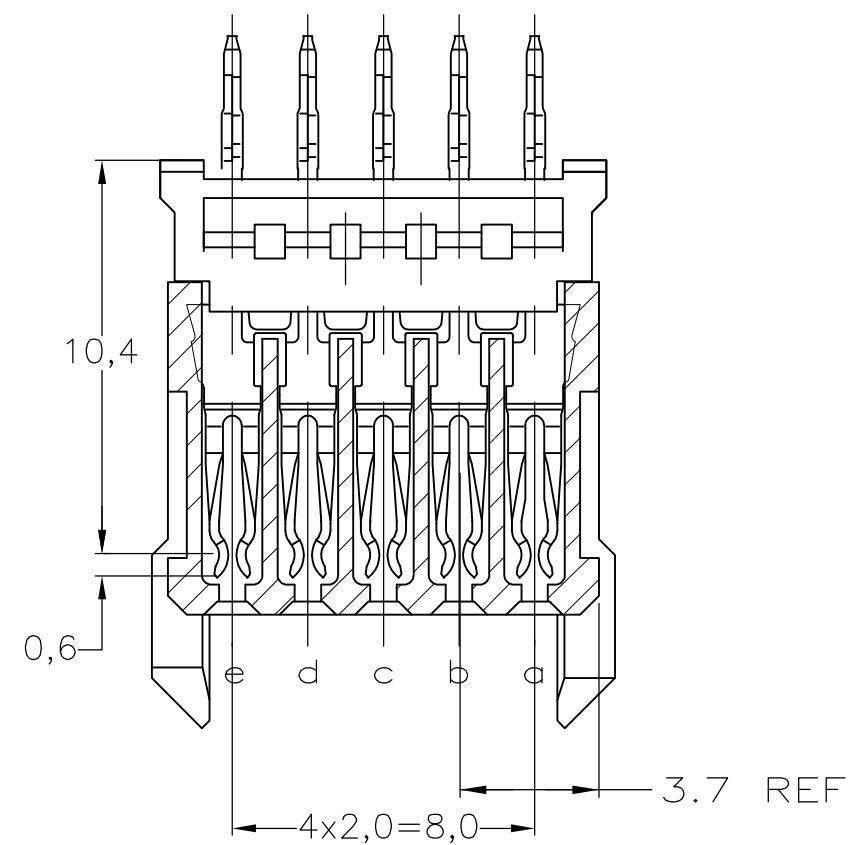

Technical drawing of a rectangular component. The drawing shows a top view and a side view. The top view is a rectangle with a width of 12,25mm and a height of 9,6mm. The side view shows a depth of 12,25mm. The component has four pins on top, each with a diameter of 1,2mm. The pins are spaced 3,0mm apart. The component is made of a material with a hardness of 120HRC.


Technical drawing of a rectangular building layout, showing a central corridor and two main sections. The drawing includes dimensions in meters.

Dimensions:


- Total width: 49.95 MAX.
- Section width (left and right): 21,9 REF
- Section length (left and right): 10x2,0=20,0
- Total length: 24x2,0=48,0
- Central corridor width: 1,1
- Entrance area width: 2,0

Layout Details:

- The layout consists of two main rectangular sections, each divided into a grid of rooms.
- Each room is represented by a square with a smaller square inside, indicating a door.
- The central corridor runs vertically through the middle of the layout.
- There is a central entrance area with a door and a small room.
- The drawing also shows a central entrance area with a door and a small room.

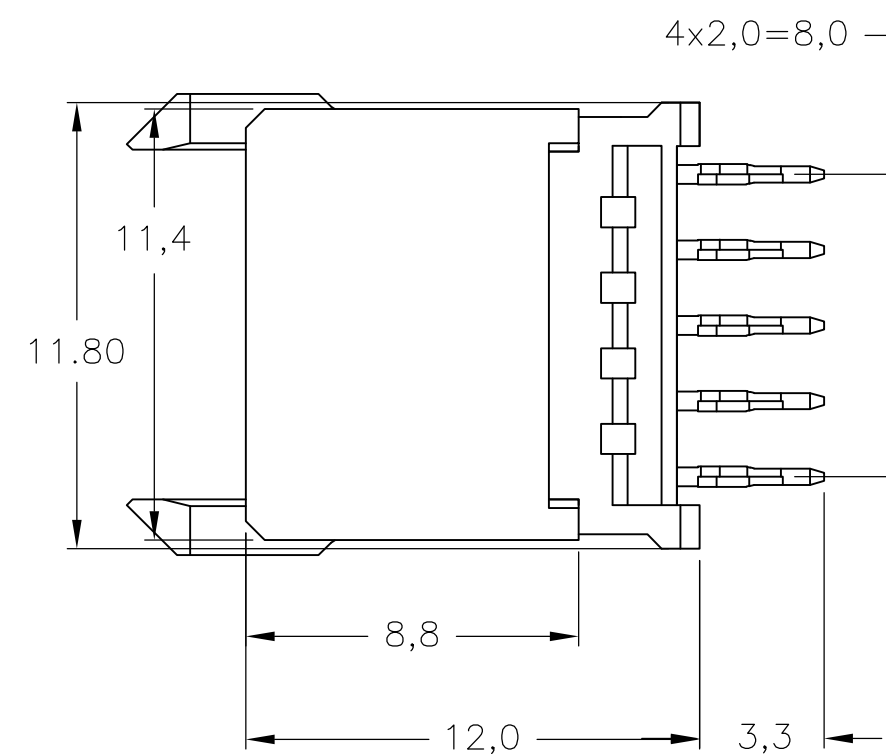

- ① MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- ⑦ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- ⑧ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- ⑨ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
- ⑩ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED).
AREA RESERVED FOR KEYING PART (BASIC P.N.:100526).
- ⑪ 0.76μm MIN GOLD PLATING AT MATING SURFACE.

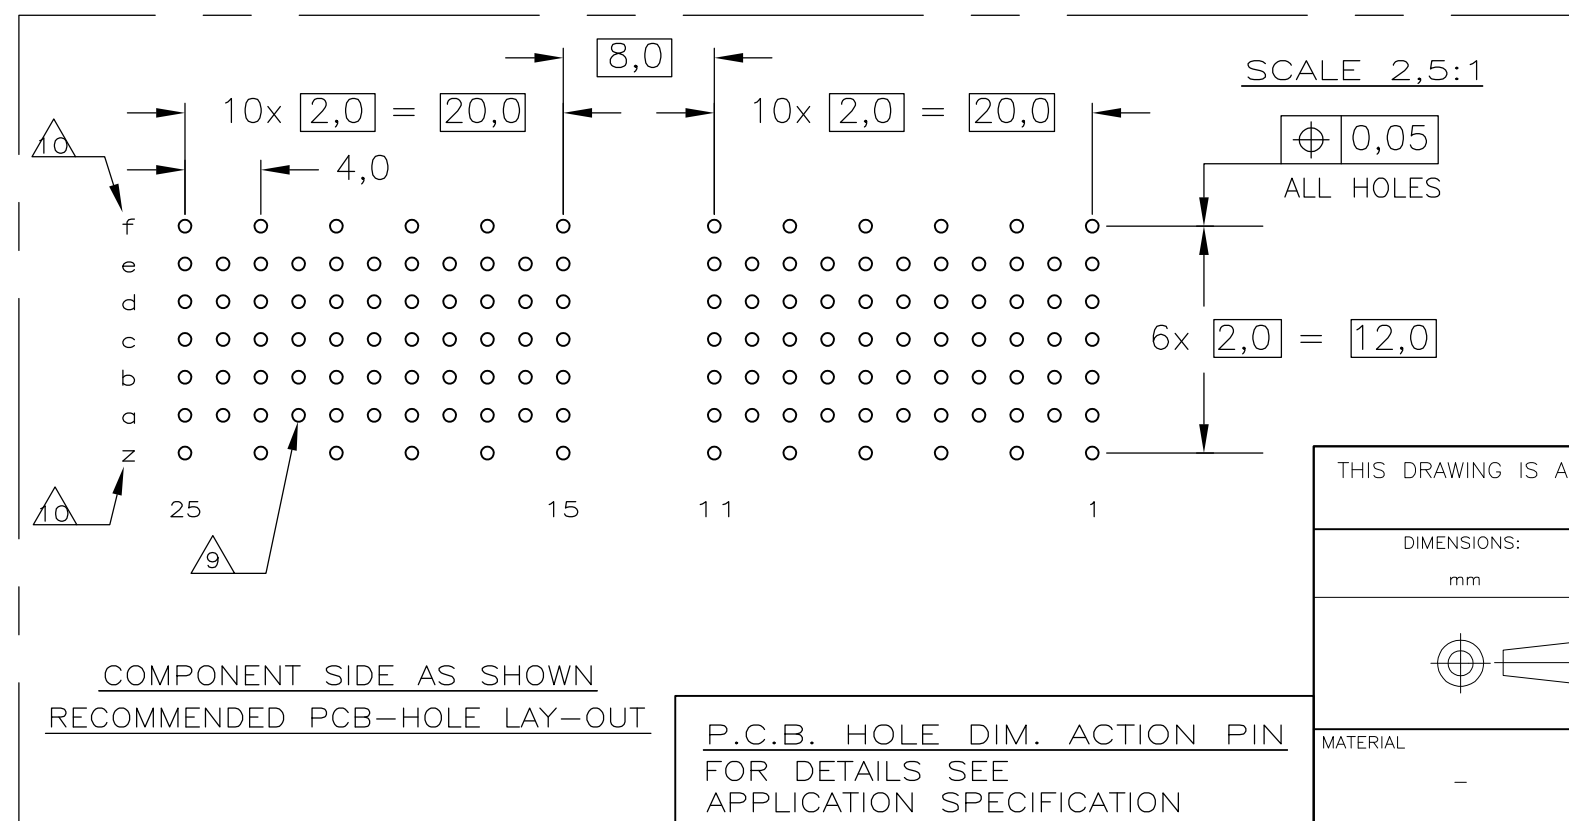

OBSOLETE	— $\frac{2}{2} \frac{3}{3} \frac{1}{1} \frac{2}{2}$	$\frac{1}{1}$	3-5106773-0
OBSOLETE	— $\frac{2}{2} \frac{6}{6} \frac{1}{1} \frac{2}{2}$	$\frac{1}{1}$	1-5106773-9
	$\frac{2}{2} \frac{5}{5} \frac{1}{1} \frac{2}{2}$	$\frac{1}{1}$	5106773-9
OBSOLETE	— $\frac{2}{2} \frac{4}{4}$	$\frac{1}{1}$	5106773-4
	$\frac{2}{2} \frac{3}{3}$	$\frac{1}{1}$	5106773-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN CHK B.MOOLJ APVD B.MOOLJ 27OCT2004		12AUG2004		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± 1-PLC ± 2-PLC ±0.2 3-PLC ± 4-PLC ± ANGLES ±		NAME		Z-PACK 2mm HM TYPE A 110 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY	
		PRODUCT SPEC 108-19082		APPLICATION SPEC 114-19029		SIZE	RESTRICTED TO
MATERIAL -		FINISH -		WEIGHT 0.00000	A2	CAGE CODE 00779	DRAWING NO C-5106773
CUSTOMER DRAWING						SCALE 5:1	SHEET 1 OF 1
						REV	