


data sheet

system:	Lithium-Ion-Battery	
nominal voltage:	7.0V	
end charge voltage:	8.4V	
max. charge current:	1600mA	
charge conditions		
standard charge:	800mA	for 3.5h min.
fast charge:	1600mA	for 2.5h min.
charging method:	CC-CV (constant current and constant voltage)	
capacity	after standard charge	
nominal:	1600mAh	at 0.2C discharge to 5.5V
minimal:	1520mAh	at 0.2C discharge
	1450mAh	at 1C discharge
energy:	11.2Wh	
max. continuous discharge current:	1600mA	
internally safety system:	protection circuit board (pcb) with protection against overcharge, deep discharge and overload	
life time expectancy:	> 300 cycles	
ambient temperature range		
charge:	0...45°C	
discharge:	-20...60°C	
long term storage:	-20...35°C (less than 1 year)	
weight:	approx. 78g	
dimensions:	L1: 55.6 ± 0.3mm L2: 39.3 ± 0.3mm L3: 20.1 ± 0.2mm	

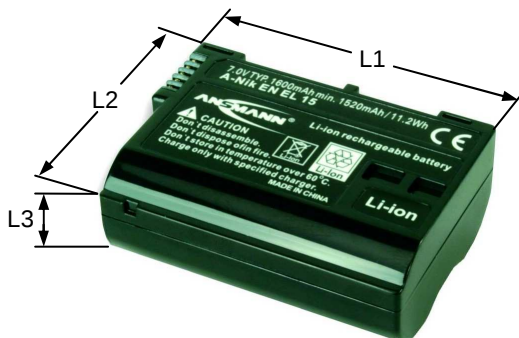

	Specifications for model/type:	A – Nik EN-EL15
	Ansmann drawing number / part number:	1400-0043
	supplier no.:	701556
	author / date:	TG / 10.04.2013