


7-DAY ELECTRONIC PROGRAMMER

ST6400

FEATURES

- Independent time control of heating and hot water.
- Seven days or 5/2 day programming.
- Up to three ON/OFF periods a day.
- Built-in Start-Up Programme.
- Clear digital display.
- Ease of operation.
- Temporary or permanent override facilities.
- 12 hour time display with am/pm indication.
- Simple change to 24 hour clock display.
- Programme indicator lights.
- Double insulated.
- Extra facility for one hour boost or programme extension.
- Earth wire parking terminal.

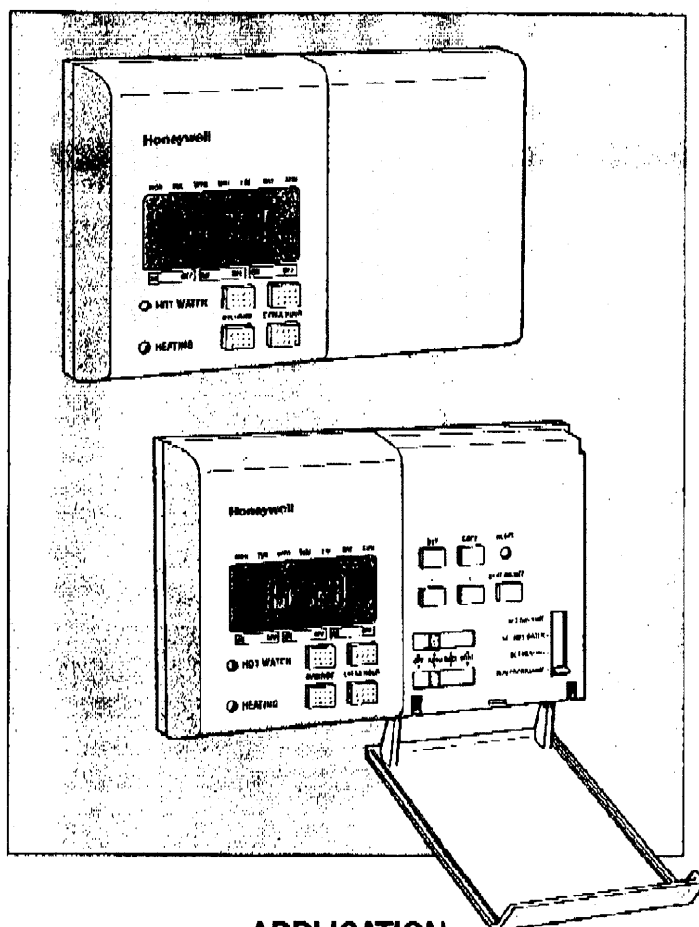

APPLICATION

The ST6400 is a fully featured electronic programmer. This model offers seven day programming with up to three on/off periods per day which can be set independently for heating and hot water. The ST6400 is designed to provide flexible programming for those people whose central heating needs vary from day to day. Transfer of programming information from one day to the next is simplified with a copy button.

A hinged cover conceals the programming buttons when not in use, leaving only the four override buttons exposed. The front cover also carries abbreviated user instructions on the inside for permanent ready reference.

Honeywell

7-DAY ELECTRONIC PROGRAMMER

ST6400

■ Installation

ST6400 can be either surface or flush switch box mounted for both of which fixing screws are supplied. The wiring sub-base has holes to suit single switch boxes and breakouts for surface wiring and mini-trunking.

When wiring is completed the plug-in module is fitted onto the sub-base and secured by tightening the retaining screws.


5/2 day programming can be selected with the integral switch on the rear of the module.

■ Ordering Specification

ST6400C1003

Electronic 7-day full programmer having independent time control for heating and hot water.

■ Wiring

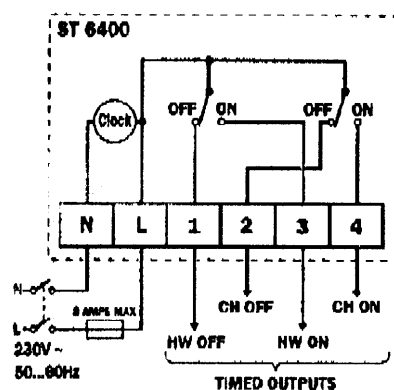

CE

■ Specification

Switch Type	: Single Pole Double Throw (SPDT)
Switch Rating	: 3(3)A
Timing Accuracy	: ± 1 min/month
Timing Resolution	: Time of Day 1 minute Programme Times 10 minutes
Ambient Operating Temperature	: 0-50°C
Power Reserve	: Minimum 4 days
Weight	: 330g approx (including wall plate)
Earthing	: Double Insulated
Battery Back-Up	: Integral battery with built-in charging circuit
Standards	: Complies with BS EN60730-2-7
EC Directive	: Conforms to 89/336/EEC & 73/23/EEC

■ Dimensions (mm)

