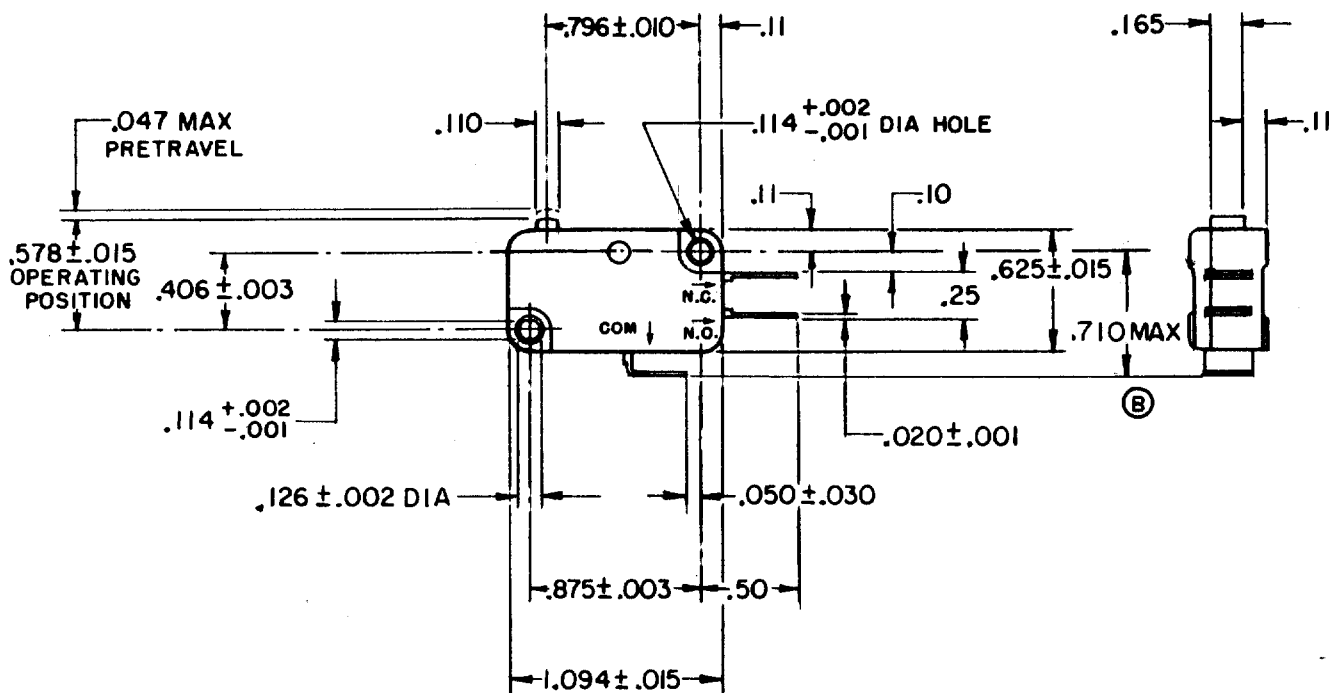
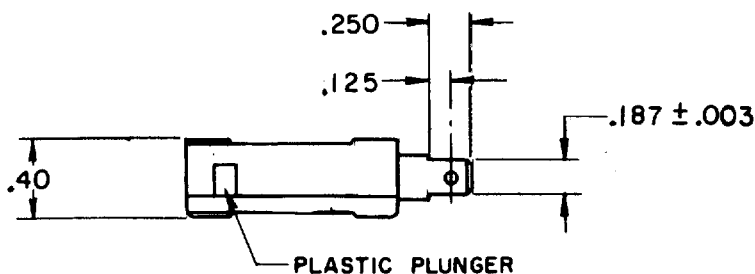


**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V3-3001-D8**CK-X3100**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 150 GRAM MAX
RELEASE TRAVEL — — — — .010 MIN
RELEASE FORCE — — — — 15 GRAM MIN
DIFFERENTIAL TRAVEL — — — — .002-.010
OVERTRAVEL — — — — .050 MIN
FREE POSITION — — — — .625 MAX

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

M V3-3001-D8DRAWING
NUMBER

X 15

B 10

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8

B 8