

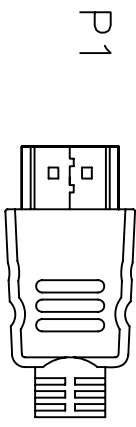
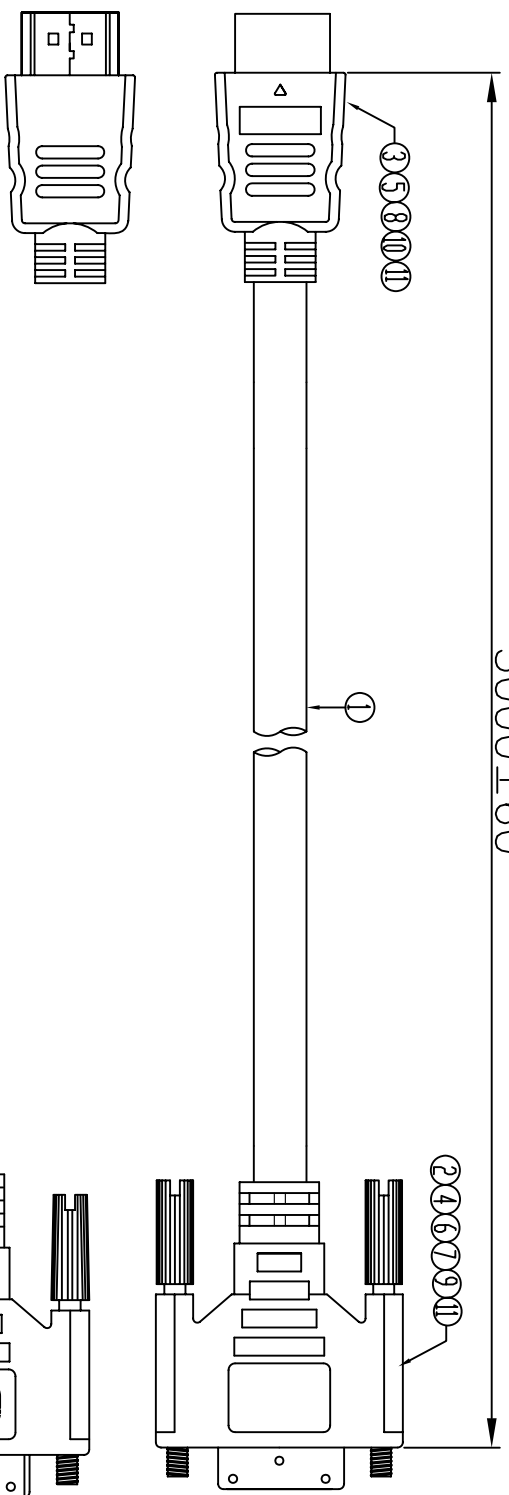


UNIT:mm

5000±60

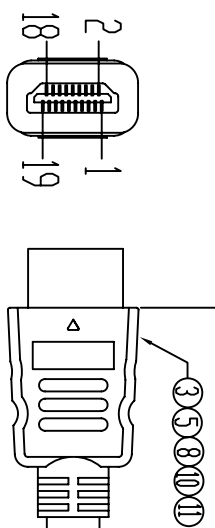

NO.	NAME	Q'TY	SPECIFICATION
①	TUBE	8	HEAT SHRINK TUBE BLACK OD3.0mm L=7mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
⑧	IN JACKET	4g	CLEAR PE(NM-18)
⑨	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑩	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W13mm*L30mm
⑪	HEAT SHRINK TUBE BLACK OD1.5mm L=25mm.	8	
⑫	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.	2	
⑬	HEAT SHRINK TUBE BLACK OD3.0mm L=7mm.	8	
⑭	HEAT SHRINK TUBE BLACK OD4.0mm L=15mm.	2	
⑮	HEAT SHRINK TUBE BLACK OD5.0mm L=15mm.	2	
⑯	HEAT SHRINK TUBE BLACK OD6.0mm L=15mm.	2	
⑰	HEAT SHRINK TUBE BLACK OD7.0mm L=15mm.	2	
⑱	HEAT SHRINK TUBE BLACK OD8.0mm L=15mm.	2	
⑲	HEAT SHRINK TUBE BLACK OD9.0mm L=15mm.	2	
⑳	HEAT SHRINK TUBE BLACK OD10.0mm L=15mm.	2	
㉑	HEAT SHRINK TUBE BLACK OD11.0mm L=15mm.	2	
㉒	HEAT SHRINK TUBE BLACK OD12.0mm L=15mm.	2	
㉓	HEAT SHRINK TUBE BLACK OD13.0mm L=15mm.	2	
㉔	HEAT SHRINK TUBE BLACK OD14.0mm L=15mm.	2	
㉕	HEAT SHRINK TUBE BLACK OD15.0mm L=15mm.	2	
㉖	HEAT SHRINK TUBE BLACK OD16.0mm L=15mm.	2	
㉗	HEAT SHRINK TUBE BLACK OD17.0mm L=15mm.	2	
㉘	HEAT SHRINK TUBE BLACK OD18.0mm L=15mm.	2	
㉙	HEAT SHRINK TUBE BLACK OD19.0mm L=15mm.	2	
㉚	HEAT SHRINK TUBE BLACK OD20.0mm L=15mm.	2	
㉛	HEAT SHRINK TUBE BLACK OD21.0mm L=15mm.	2	
㉜	HEAT SHRINK TUBE BLACK OD22.0mm L=15mm.	2	
㉝	HEAT SHRINK TUBE BLACK OD23.0mm L=15mm.	2	
㉞	HEAT SHRINK TUBE BLACK OD24.0mm L=15mm.	2	
㉟	HEAT SHRINK TUBE BLACK OD25.0mm L=15mm.	2	
㊱	HEAT SHRINK TUBE BLACK OD26.0mm L=15mm.	2	
㊲	HEAT SHRINK TUBE BLACK OD27.0mm L=15mm.	2	
㊳	HEAT SHRINK TUBE BLACK OD28.0mm L=15mm.	2	
㊴	HEAT SHRINK TUBE BLACK OD29.0mm L=15mm.	2	
㊵	HEAT SHRINK TUBE BLACK OD30.0mm L=15mm.	2	
㊶	HEAT SHRINK TUBE BLACK OD31.0mm L=15mm.	2	
㊷	HEAT SHRINK TUBE BLACK OD32.0mm L=15mm.	2	
㊸	HEAT SHRINK TUBE BLACK OD33.0mm L=15mm.	2	
㊹	HEAT SHRINK TUBE BLACK OD34.0mm L=15mm.	2	
㊺	HEAT SHRINK TUBE BLACK OD35.0mm L=15mm.	2	
㊻	HEAT SHRINK TUBE BLACK OD36.0mm L=15mm.	2	
㊼	HEAT SHRINK TUBE BLACK OD37.0mm L=15mm.	2	
㊽	HEAT SHRINK TUBE BLACK OD38.0mm L=15mm.	2	
㊾	HEAT SHRINK TUBE BLACK OD39.0mm L=15mm.	2	
㊿	HEAT SHRINK TUBE BLACK OD40.0mm L=15mm.	2	
1	CABLE	1	UL20276 [(30AWG*1P+DW+AL/M)*4]+28AWG*7C+AL/MY+D.W+BD+JACKET:BLACK OD:5.7±0.15mm L=5000±40/-0mm.

Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:2 ohm max.
3.Insulation Resistance:10M ohm min.
4.Hi-Pot:300V DC/10ms
5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

Cnc Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY

ZHONGHS

DRAWING NO.

VG/LJQ-094-008

CHECKED BY

CUSTOMER

CNC

APPROVAL BY

ITEM NO.

741-20010-00500

DECIDE BY

DATE

2012-02-14

VERSIONS/EDITION

A/0

PROJECTION