



LOADING PATTERN MATING SIDE

f	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	4	4	4	4	4	4	4	4	4	4	4	6	4	6	4	4	4	4	4	4	4
d	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
c	4	4	4	4	4	4	4	4	4	4	4	6	4	4	4	4	4	6	4	4	4
b	4	4	4	4	4	4	4	4	4	4	4	5	4	4	4	4	4	5	4	4	4
a	4	4	4	4	4	4	4	4	4	4	4	6	4	4	4	4	4	6	4	4	4
z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
P	0																				
S	1											5									


LOADED CONNECTOR ASSEMBLY (FOR EXAMPLE)

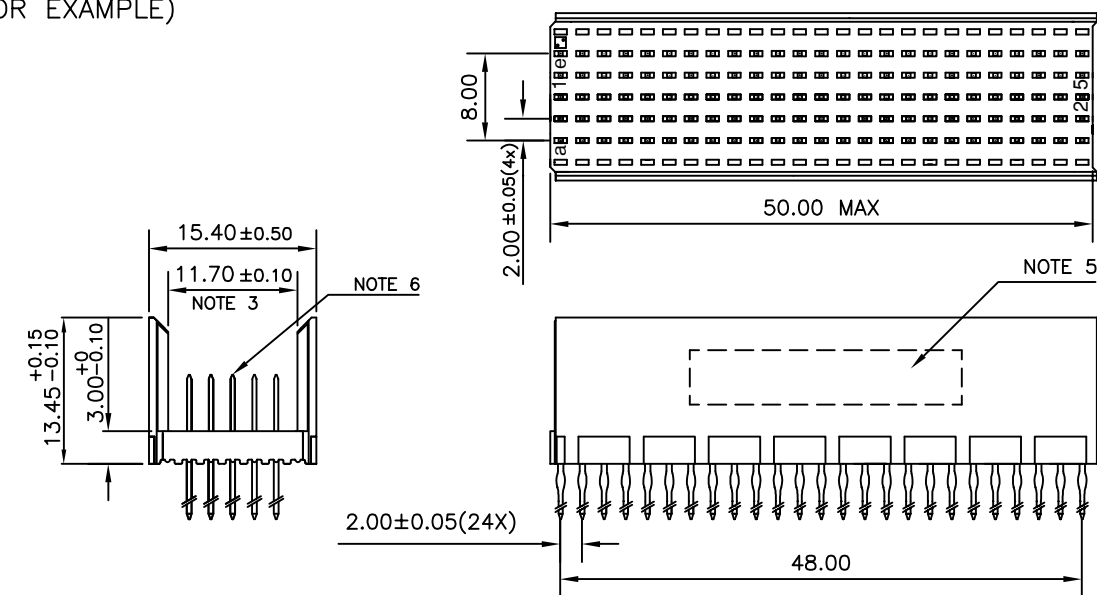

CONTACT OVERVIEW

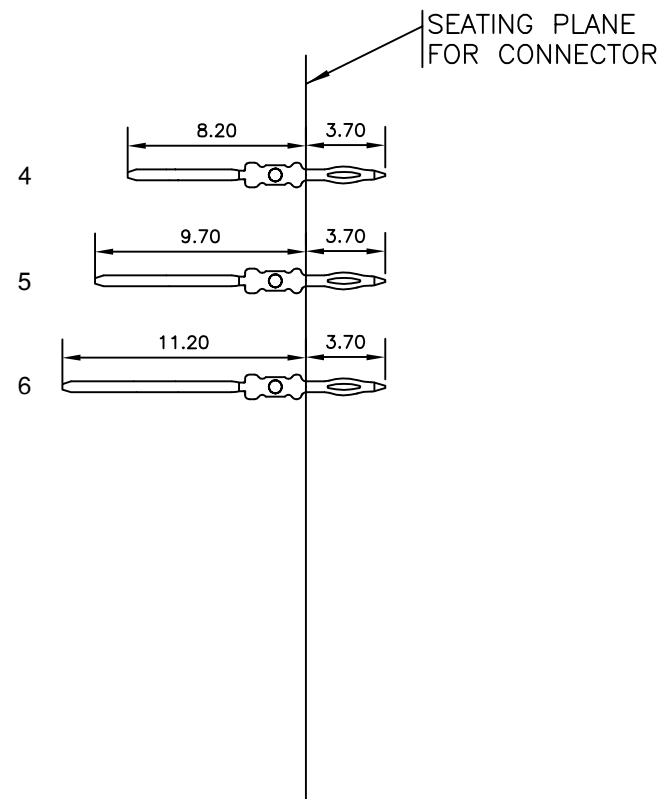

LAY-OUT P.C.B.-HOLE

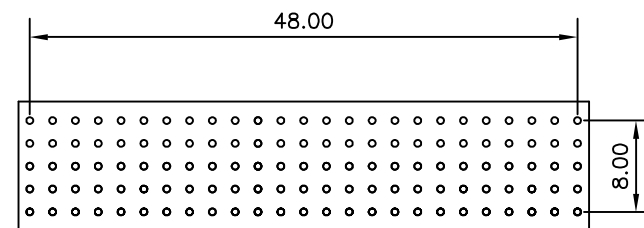


HM2P08PDF3M0 **LEAD FREE INDICATOR : LF = LEAD FREE (DIGIT 15 & 16)**

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

- THIS PRODUCT IS CSA APPROVED.
- THIS PRODUCT IS UL RECOGNIZED.
- MEASURED AT THE BOTTOM.
- MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
- CONNECTOR PRINTED WITH P/N AND DATE CODE.
- FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
- SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PDF3M0----

mat'l. code SEE NOTE 4				surface ISO 1302 		tolerance ISO 406 ISO 1101		projection 		product family MILLIPACS						
ltr	ecn no	dr	date	tolerances unless otherwise specified				title MPACS 5+2R STR HDR PF CONN TYPE B								
A	I04-0120	MINI	2004/12/11	angles	linear											.0±0.2
B	I05-0195	MINI	2005/10/18													.00±0.1
C	I06-0090	MINI	2006/06/30													0°±1°
				dr	MINI K VANDANATH		2004/12/11				dwg no		sheet 1 of 1		size	
				engr	BIJU K PAUL		2004/12/11				BS, C ,203028,186		A3			
				chr	BIJU K PAUL		2006/06/30									
				appd	BIJU K PAUL		2006/06/30									
sheet index		revision	c													
		sheet	1													