

## High Ohmic (up to 68 M $\Omega$ )/ High Voltage (up to 10 kV) Resistors



A metal glazed film is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned electrolytic copper wires are welded to the end-caps. The resistors are coated with a light blue lacquer which provides electrical, mechanical, and climatic protection.

The encapsulation is resistant to all cleaning solvents in accordance with "MIL-STD 202E, method 215" and "IEC 60068-2-45".

### FEATURES

- Lead (Pb)-free solder contacts
- These resistors meet the safety requirements of:
  - "UL1676" (510 k $\Omega$  to 11 M $\Omega$ ); File No: E171160
  - "IEC 60065"
  - "EN60065"
  - "VDE 0860" (Germany)
  - "CQC" (China)
- High pulse loading capability (10 kV)
- Small size (0718)
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)



### APPLICATIONS

- Where high resistance, high stability and high reliability at high voltage are required
- Safety component in combination with high voltage
- Picture tubes
- High voltage bleeders
- Cascade switches

TECHNICAL SPECIFICATIONS	
DESCRIPTION	VALUE
Resistance range <sup>(1)</sup>	100 k $\Omega$ to 68 M $\Omega$
Resistance tolerance and series	$\pm 1\%$ : E24/E96 series; $\pm 5\%$ : E24 series
Maximum dissipation at $T_{amb} = 70\text{ }^{\circ}\text{C}$	1 W
Thermal resistance, $R_{th}$	70 K/W
Temperature coefficient	$\leq \pm 200 \times 10^{-6}/\text{K}$
Maximum permissible voltage:	
DC	10 000 V
RMS	7000 V
Dielectric withstanding voltage of the insulation for 1 minute	700 V
Basic specifications	IEC 60115-1B
Safety requirements	UL1676 (510 k $\Omega$ to 11 M $\Omega$ ); EN60065; VDE 0860; CQC
Climatic category (IEC 60068)	55/155/56
Stability after:	
load (1000 hours)	$\Delta R \text{ max.: } \pm (1.5\% R + 0.1\text{ }\Omega)$
accelerated damp heat test (6 days)	$\Delta R \text{ max.: } \pm (1.5\% R + 0.1\text{ }\Omega)$
long term damp heat test (56 days)	$\Delta R \text{ max.: } \pm (1.5\% R + 0.1\text{ }\Omega)$
Noise	max. 2.5 $\mu\text{V/V}$

#### Note:

<sup>(1)</sup> Ohmic values (other than resistance range) are available upon request.

**12NC INFORMATION**

- The resistors have a 12-digit numeric code starting with 2322 244
- The subsequent:  
first digit for 1 % tolerance products (E24 and E96 series)  
or 2 digits for 5 % (E24 series) indicate the resistor type and packing
- The remaining digits indicate the resistance value:
  - The first 3 digits for 1 % or 2 digits for 5 % tolerance products indicate the resistance value
  - The last digit indicates the resistance decade

**Last Digit of 12NC Indicating Resistance Decade**

RESISTANCE DECADE	LAST DIGIT
100 to 976 k $\Omega$	4
1 to 9.76 M $\Omega$	5
$\geq 10$ M $\Omega$	6

**12NC Example**

The 12NC for a VR68, resistor value 7.5 M $\Omega$ , 5 % tolerance, supplied on a bandolier of 500 units in ammpack, is: 2322 244 13755.

**12NC - resistor type and packaging**

TYPE	TAPE WIDTH (mm)	TOL. (%)	ORDERING CODE 2322 244 .....	
			BANDOLIER IN AMMOPACK	BANDOLIER ON REEL
			500 units	750 units
VR68	66.7	$\pm 1$	8....	6....
		$\pm 5$	13...	23...

**PART NUMBER**

PART NUMBER: VR68000001503JAC00


V	R	6	8	0	0	0	0	0	1	5	0	3	J	A	C	0	0
MODEL/SIZE	SPECIAL CHARACTER		TCR/MATERIAL		VALUE		TOLERANCE		PACKAGING <sup>(1)</sup>		SPECIAL						
VR68000	0 = neutral Z = value overflow (Special)		0 = standard		3 digit value 1 digit multiplier <b>Multiplier:</b> 3 = *10 <sup>3</sup> 4 = *10 <sup>4</sup> 5 = *10 <sup>5</sup>		F = ± 1 % J = ± 5 %		AC RD		The 2 digits are used for all special parts. 00 = standard						
PRODUCT DESCRIPTION: VR68 5 % AC 150K																	
VR68		5 %		AC		150K											
MODEL/SIZE		TOLERANCE		PACKAGING <sup>(1)</sup>		RESISTANCE VALUE											
VR68		± 1 % ± 5 %		AC RD		150K = 150 kΩ 8M2 = 8.2 MΩ											

**Notes:**<sup>(1)</sup> Please refer to table PACKAGING for details.

- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products.

**PACKAGING**

CODE	PIECES	DESCRIPTION	MODEL/SIZE
AC	500	Bandolier in ammpack straight leads	VR68
RD	750	Bandolier on reel straight leads	

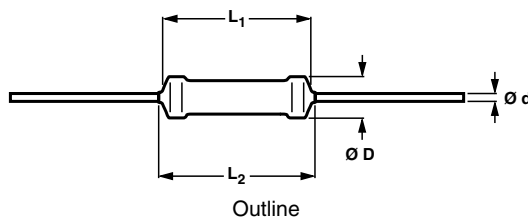**DIMENSIONS**

<b>DIMENSIONS</b> - resistor type and relevant physical dimensions				
TYPE	Ø D MAX.	L <sub>1</sub> MAX.	L <sub>2</sub> MAX.	Ø d
VR68	6.8	18.0	19.0	0.78 ± 0.05

<b>MASS PER 100 UNITS</b>	
TYPE	MASS (g)
VR68	169.1

**MARKING**

The nominal resistance and tolerance are marked on the resistor using four or five colored bands in accordance with IEC publication 60062 "Color codes for fixed resistors".

Yellow and grey are used instead of gold and silver because metal particles in the lacquer could affect high-voltage properties.

**OUTLINES**

The length of the body (L<sub>1</sub>) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation ("IEC publication 60294").

**FUNCTIONAL PERFORMANCE****PRODUCT CHARACTERIZATION**

Standard values of nominal resistance are taken from the E96/E24/E12 series for resistors with a tolerance of ± 1 % or

5 %. The values of the E96/E24 series are in accordance with "IEC publication 60063".

<b>LIMITING VALUES</b>			
TYPE	LIMITING VOLTAGE <sup>(1)</sup> (V)		LIMITING POWER (W)
	DC	RMS	
VR68	10 000	7000	1.0

**Notes:**


<sup>(1)</sup> The maximum voltage that may be continuously applied to the resistor element, see "IEC publication 60115-1".

- The maximum permissible hot-spot temperature is 155 °C.

High Ohmic (up to 68 M $\Omega$ )/  
High Voltage (up to 10 kV) Resistors


Vishay BCcomponents

The power that the resistor can dissipate depends on the operating temperature.

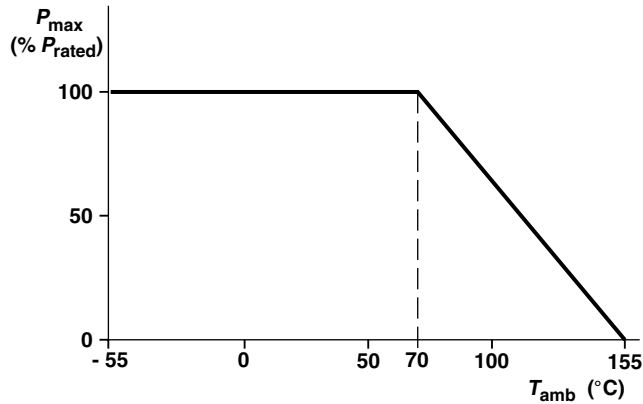


Maximum dissipation ( $P_{max}$ ) in percentage of rated power as a function of the ambient temperature ( $T_{amb}$ )

## Derating

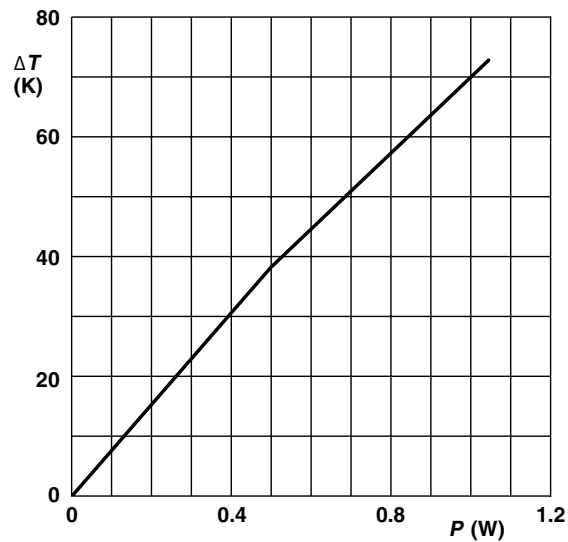


Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power

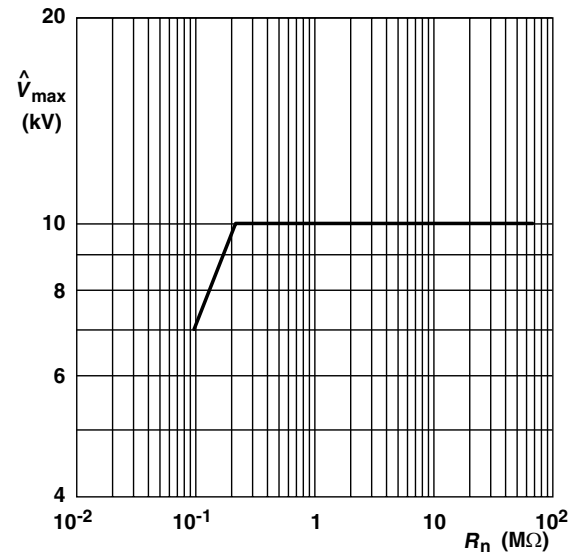

Maximum allowed peak pulse voltage in accordance with "IEC 60065 chapter 14.1"; 50 discharges from a 1 nF capacitor charged to  $\hat{V}_{max}$ ; 12 discharges/minute (drift  $\Delta R/R \leq 2\%$ )

## Pulse Loading Capability

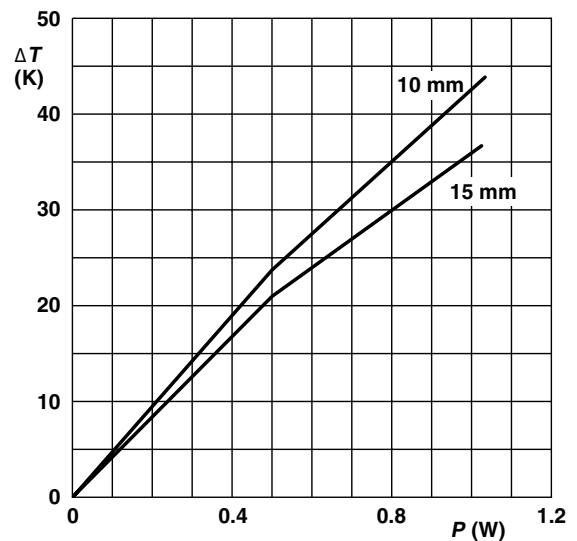

Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting

## Application Information

## TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the schedule of "IEC publication 60115-1", category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days). The testing also covers the requirements specified by EIA and EIAJ.

The tests are carried out in accordance with IEC publication 60068-2, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and

under standard atmospheric conditions according to "IEC 60068-1", subclause 5.3.

In the Test Procedures and Requirements table the test and requirements are listed with reference to the relevant clauses of "IEC publications 60115-1 and 60068-2"; a short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying.

All soldering tests are performed with mildly activated flux.

TEST PROCEDURES AND REQUIREMENTS				
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.16	21 (U)	robustness of terminations:		
4.16.2	21 (Ua1)	tensile all samples	$\varnothing$ 0.8 mm; load 10 N; 10 seconds	number of failures < $10 \times 10^{-6}$
4.16.3	21 (Ub)	bending half number of samples	$\varnothing$ 0.8 mm; load 5 N; 4 x 90°	number of failures < $10 \times 10^{-6}$
4.16.4	21 (Uc)	torsion other half of samples	3 x 360° in opposite directions	no damage $\Delta R$ max.: $\pm (0.5 \% R + 0.05 \Omega)$
4.17	20 (Ta)	solderability	2 seconds; 235 °C	good tinning; no damage
4.18	20 (Tb)	resistance to soldering heat	thermal shock: 3 seconds; 350 °C; 3 mm from body	$\Delta R$ max.: $\pm (0.5 \% R + 0.05 \Omega)$
4.19	14 (Na)	rapid change of temperature	30 minutes at - 55 °C and 30 minutes at + 155 °C; 5 cycles	$\Delta R$ max.: $\pm (0.5 \% R + 0.05 \Omega)$
4.20	29 (Eb)	bump	3 x 1500 bumps in 3 directions; 40 g	no damage $\Delta R$ max.: $\pm (0.5 \% R + 0.05 \Omega)$
4.22	6 (Fc)	vibration	frequency 10 to 500 Hz; displacement 1.5 mm or acceleration 10 g; 3 directions; total 6 hours (3 x 2 hours)	no damage $\Delta R$ max.: $\pm (0.5 \% R + 0.05 \Omega)$
4.23		climatic sequence:		
4.23.2	2 (Ba)	dry heat	16 hours; 155 °C	
4.23.3	30 (Db)	damp heat (accelerated) 1 <sup>st</sup> cycle	24 hours; 55 °C; 90 to 100 % RH	
4.23.4	1 (Aa)	cold	2 hours; - 55 °C	
4.23.5	13 (M)	low air pressure	2 hours; 8.5 kPa; 15 to 35 °C	

**TEST PROCEDURES AND REQUIREMENTS**

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.23.6	30 (Db)	damp heat (accelerated) remaining cycles	5 days; 55 °C; 95 to 100 % RH	$R_{ins}$ min.: 10 <sup>3</sup> M $\Omega$ $\Delta R$ max.: $\pm (1.5 \% R + 0.1 \Omega)$
4.24.2	3 (Ca)	damp heat (steady state)	56 days; 40 °C; 90 to 95 % RH; dissipation 0.01 P <sub>n</sub> ; limiting voltage 100 V (DC)	$\Delta R$ max.: $\pm (1.5 \% R + 0.1 \Omega)$
4.25.1		endurance	1000 hours at 70 °C; P <sub>n</sub> or V <sub>max</sub>	$\Delta R$ max.: $\pm (1.5 \% R + 0.1 \Omega)$
4.8.4		temperature coefficient	between - 55 °C and + 155 °C (TC $\times 10^{-6}/K$ )	$\leq \pm 200$
4.7		voltage proof on insulation	700 V <sub>RMS</sub> during 1 minute; V-block method	no breakdown
4.12		noise	"IEC publication 60195"	max. 2.5 $\mu V/V$
4.6.1.1		insulation resistance	500 V (DC) during 1 minute; V-block method	$R_{ins}$ min.: 10 <sup>4</sup> M $\Omega$
4.13		short time overload	room temperature; dissipation 6.25 x P <sub>n</sub> (voltage not more than 2 x limiting voltage; 10 000 V max.); 10 cycles; 5 seconds ON and 45 seconds OFF	$\Delta R$ max.: $\pm (2.0 \% R + 0.05 \Omega)$



### Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[VR68 100K 1%](#) [VR68 10M 1%](#) [VR68 1M 1%](#) [VR68 3.3M 5%](#) [VR68000001005JAC00](#) [VR68000002205JAC00](#)  
[VR68000006804JAC00](#) [VR68000001004FAC00](#)